



**DL-AC-FLEX-ODF**

**INFINA® LED FLEXIBLE LINEAR  
AC FLEXIBLE LINEAR STRIP**

PATENT NO.:9,671,075  
PATENT NO.:9,746,144

Type	
Project	
Catalog No.	

## OUTDOOR HARDWIRE INSTALLATION INSTRUCTIONS

Please read and save these instructions. Read carefully before using product. Protect yourself and others by observing all safety information, warnings and cautions. Failure to comply with instructions could result in personal injury and/or damage to product or property. Please retain instruction sheet for future reference.

**DO NOT CUT OR SHORTEN INFINA. DOING SO CAN CAUSE RISK OF ELECTRICAL SHOCK.**





### IMPORTANT SAFETY INSTRUCTIONS



All electrical connections must be in accordance with local codes, ordinances and the National Electric Code. This product operates on 120 VAC; always confirm the maximum wattage of the linear strip does not exceed the maximum wattage of the circuit it is connected to. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.

- Do not cover this product as the covering may cause the flexible light to overheat and melt or ignite.
- Do not operate with the flexible light while attached to plastic spool or tightly coiled. Excess heat may melt the spool and/or strip light.
- Do not puncture, cut, shorten, or splice the flexible lighting.
- Do not route the cord or flexible lighting cable through walls, doors, windows or any like part of the building structure.
- Do not use if there is any damage to the light or cord insulation. Inspect periodically.
- Do not submerge flexible light in liquids or use the product in the vicinity of standing water or other liquids.
- Do not install near areas with exposure to salt water or chlorinated water.
- Secure this flexible light using only hangers or clips provided. Do not secure this product with staples, nails, or like means that may damage the insulation or permanently attach to the building structure.
- Do not subject flexible lighting to continuous flexing.
- Do not exceed the length in feet permitted by the marking.
- Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.

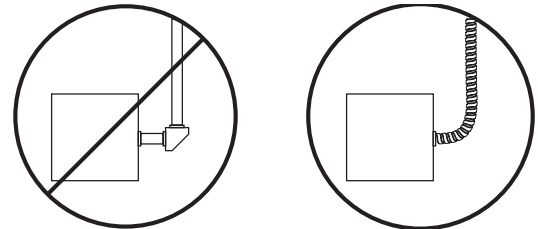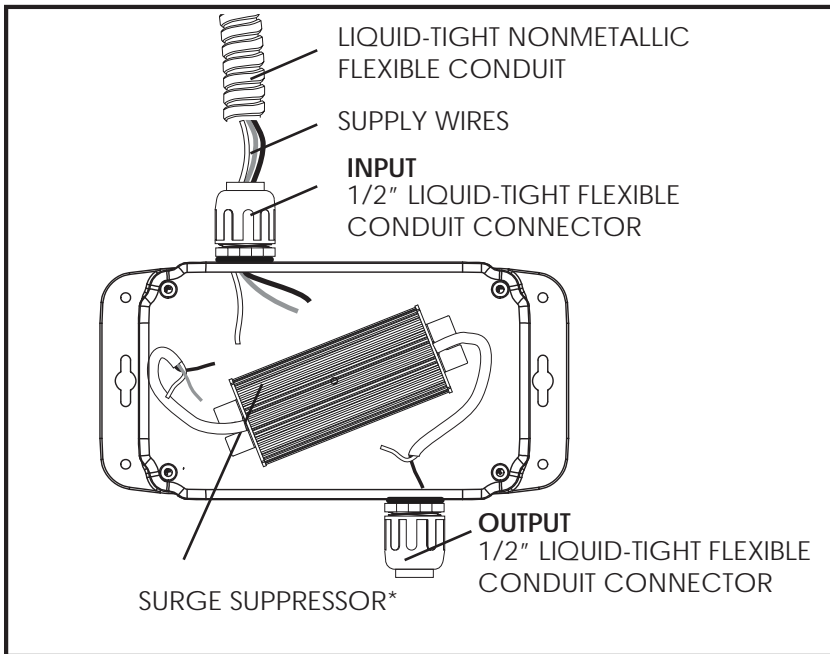

**FLEXIBLE CONDUIT ONLY**



**\*DO NOT REMOVE SURGE SUPPRESSOR**  
Doing so is in direct violation to UL requirements and will void the warranty of the product.

## SAVE THESE INSTRUCTIONS

**JESCO**  
LIGHTING GROUP

www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6th Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955





# DL-AC-FLEX-ODF

INFINA® LED FLEXIBLE LINEAR  
AC FLEXIBLE LINEAR STRIP

PATENT NO.:9,671,075  
PATENT NO.:9,746,144

Type	
Project	
Catalog No.	


## MOUNTING OPTIONS

Excluding metal channel mounting, please see DL-AC-FLEX-CH6-M installation sheet




Per UL safety requirements, DL-AC-FLEX-MC-HW mounting clips must be used in mounting at the beginning and the end of each section of DL-AC-FLEX in a run.


		INCLUDED
		DL-AC-FLEX-MC-HW
		Required 2 per section




2x DL-AC-FLEX-MC-HW (Provided)  
+  
DL-AC-FLEX-CHX




Secure channel on wall or other surfaces with self-tapping screws every 6 inches.  
**NOTE:** 2 hardwire clips (provided) must be used to secure the beginning and the end of each section of DL-AC-FLEX.




2x DL-AC-FLEX-MC-HW (Provided)  
+  
DL-AC-FLEX-MC-HW

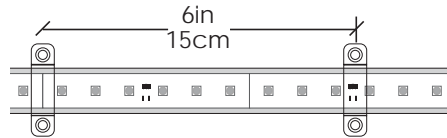

Secure hardwire clips on DL-AC-FLEX with self-tapping screws. To prevent sagging on face-down application, we recommend to install hardwire clips 6" (15cm) apart.  
**NOTE:** 2 hardwire clips (provided) must be used to secure the beginning and the end of each section of DL-AC-FLEX.





2x DL-AC-FLEX-MC-HW (Provided)  
+  
DL-AC-FLEX-MC | DL-AC-FLEX-MC-M



Secure mounting U clips on wall or other surfaces with self-tapping screws every 6 inches.  
**NOTE:** 2 hardwire clips (provided) must be used to secure the beginning and the end of each section of DL-AC-FLEX.

Illustration is a representation of three sections of DL-AC-FLEX in one run using methods A, B & C (not to scale, not for installation)

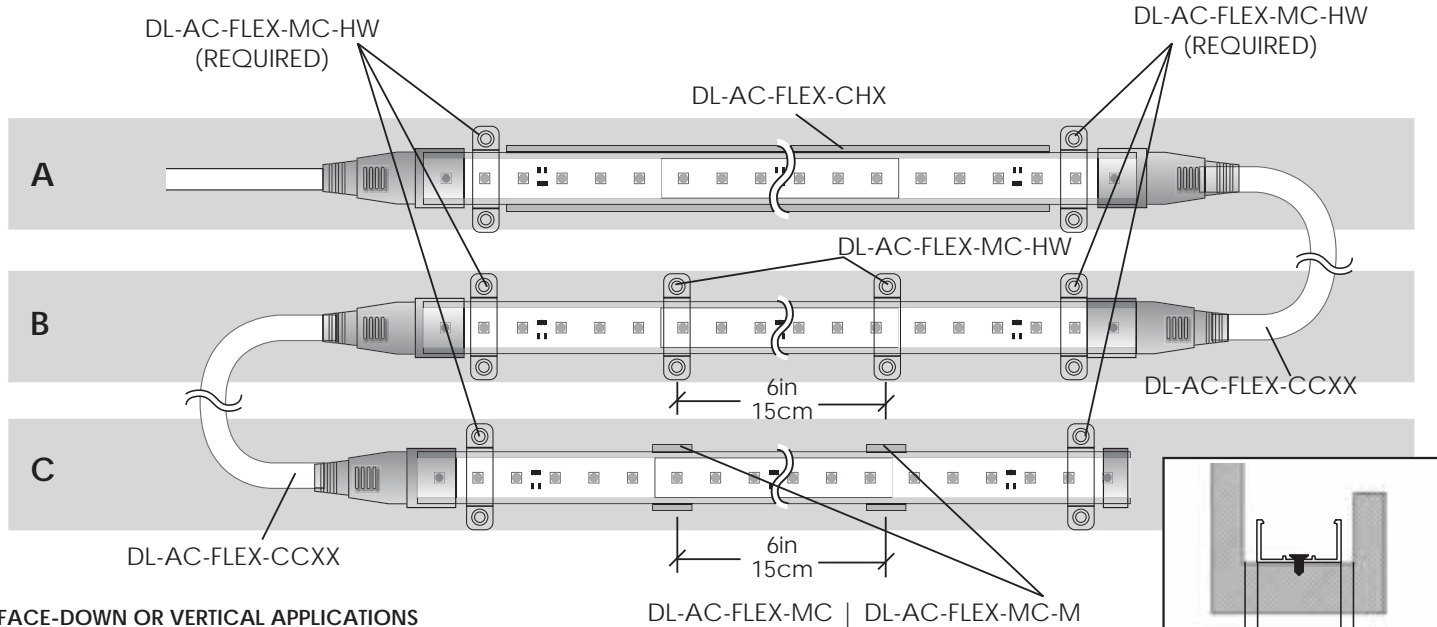

**FACE-DOWN OR VERTICAL APPLICATIONS**  
Mounting option (A) with channel is recommended.

**FACE-UP OR HORIZONTAL APPLICATIONS**  
Mounting option (A)(B)&(C) are all appropriate.



www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6th Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955





# DL-AC-FLEX-ODF

INFINA® LED FLEXIBLE LINEAR  
AC FLEXIBLE LINEAR STRIP

PATENT NO.:9,671,075  
PATENT NO.:9,746,144

Type	
Project	
Catalog No.	



## INSTALLING DL-AC-FLEX-HW-ODF




### TURN OFF ELECTRICITY

at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.

MIN 90° C SUPPLY CONDUCTORS.




FLEXIBLE CONDUIT ONLY FOR INPUT AND OUTPUT



### CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT

RATED 120VOLT AC | 4.95Watt / Foot


NOTE: ALL CONNECTIONS MUST BE PROPERLY SECURED AND SEALED FOR OUTDOOR INSTALLATIONS.



NEVER POWER THE STRIP LIGHT WHILE ATTACHED TO A SPOOL OR WHEN TIGHTLY COILED.


### REQUIRED PARTS FOR INSTALLATION

DL-AC-FLEX-HW-ODF (Included)



NEMA 4X RATED ENCLOSURE WITH SURGE SUPPRESSOR AND CONNECTIONS TO 1/2"Ø NON-METALLIC FLEXIBLE CONDUIT

DL-AC-FLEX-HW-ODF-CONN (Included)



COUPLER  
1/2" LIQUID-TIGHT FLEXIBLE CONDUIT CONNECTOR TO 1/2" LIQUID-TIGHT CORD GRIP CONNECTOR


LIQUID-TIGHT NONMETALLIC FLEXIBLE CODUIT (Not Included)




1/2" NON-METALLIC LIQUID-TIGHT FLEXIBLE CONDUIT MUST BE UL, ETL OR CSA APPROVED

REQUIRED FOR INPUT AND OUTPUT CONNECTION

WIRE NUTS (Not Included)



### TYPICAL INSTALLATION

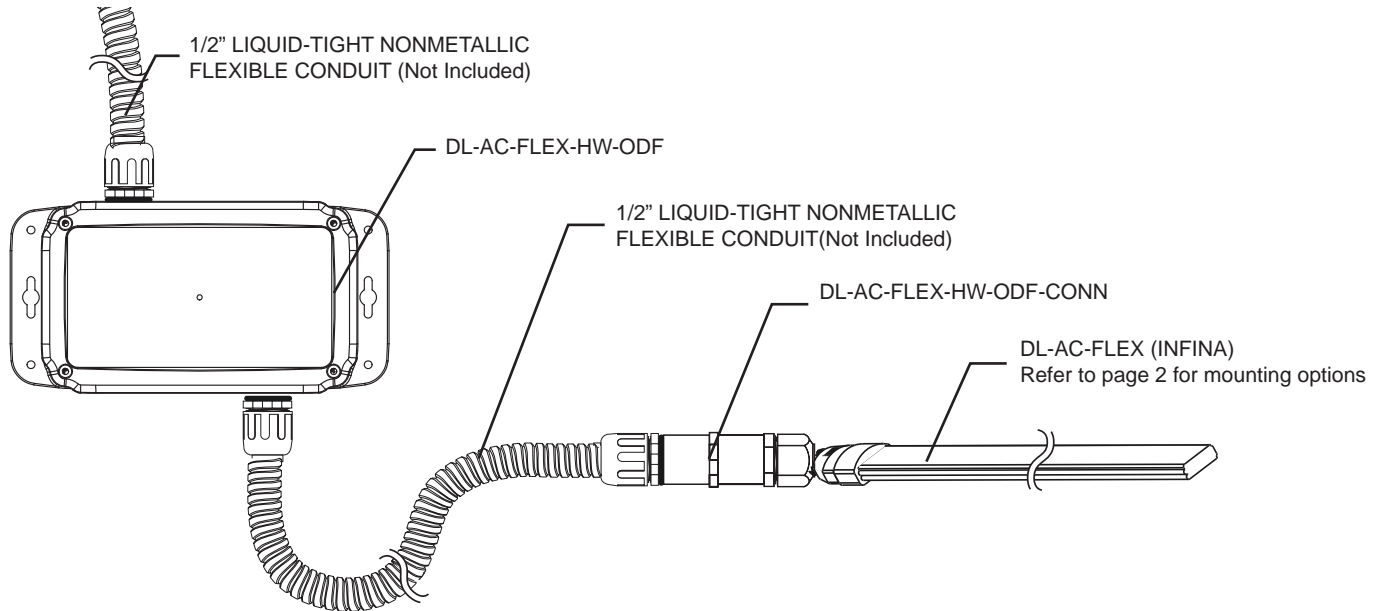

www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6th Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955





# DL-AC-FLEX-ODF

INFINA® LED FLEXIBLE LINEAR  
AC FLEXIBLE LINEAR STRIP

PATENT NO.:9,671,075  
PATENT NO.:9,746,144

Type	
Project	
Catalog No.	

## INSTALLING DL-AC-FLEX-HW-ODF



### TURN OFF ELECTRICITY


at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.

MIN 90° C SUPPLY CONDUCTORS.



### CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT

RATED 120VOLT AC | 4.95Watt / Foot

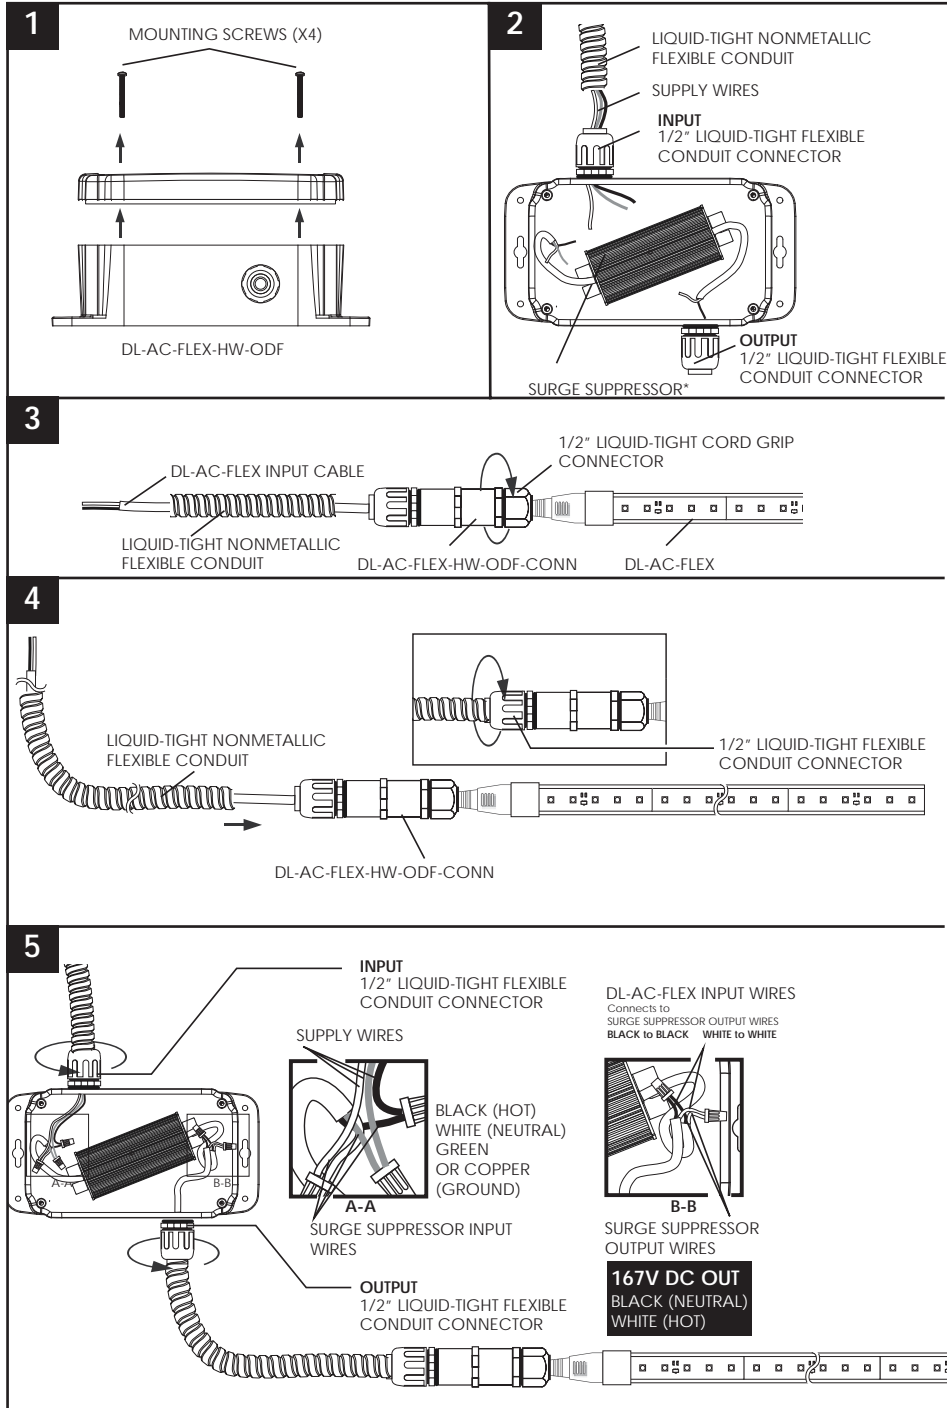

### \*DO NOT REMOVE SURGE SUPPRESSOR

Doing so is in direct violation to UL requirements and will void the warranty of the product.

1 Unscrew and remove mounting screws and remove lid from DL-AC-FLEX-HW-ODF, save for later use.

2 Feed supply wires and liquid-tight non metallic flexible conduit to INPUT 1/2" liquid-tight flexible conduit connector (pre-measure and cut flexible conduit to desired length).

3 Feed DL-AC-FLEX input cable through DL-AC-FLEX-HWF-CONN followed by a 1/2" liquid-tight nonmetallic flexible conduit. Secure DL-AC-FLEX-HW-ODF-CONN onto DL-AC-FLEX by tightening the 1/2" liquid-tight cord grip connector.

4 Insert liquid-tight nonmetallic flexible conduit into DL-AC-FLEX-HW-ODF-CONN. Tighten 1/2" liquid-tight flexible conduit connector to secure.

#### 5 A-A

1. Connect hot supply wire (black) to surge suppressor's hot input wire (black).
  2. Connect neutral supply wire to (white) surge suppressor's neutral input wire (white).
  3. Connect supply ground wire (green or bare copper) to surge suppressor's ground input wire (green).
- Secure all connections with wire nuts (not included).

#### 5 B-B

1. Connect surge suppressor's output wires to DL-AC-FLEX's input wires BLACK to BLACK, WHITE to WHITE.

5 Carefully tuck all connected wires inside DL-AC-FLEX-HW-ODF. Secure lid to DL-AC-FLEX-HW-ODF with 4 mounting screws. making sure to not pinch any wires or wire nuts.



NOTE: ALL CONNECTIONS MUST BE PROPERLY SEURED AND SEALED FOR OUTDOOR INSTALLATIONS.

# JESCO

LIGHTING GROUP

www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6th Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955





Type	
Project	
Catalog No.	

## OUTDOOR HARDWIRE INSTALLATION INSTRUCTIONS

### TROUBLESHOOTING

PROBLEM	POSSIBLE CAUSE	CORRECTION / ACTION
Product is not lighting up	<ol style="list-style-type: none"> <li>1. Product may have been connected directly to 120VAC without surge suppressor.</li> <li>2. Breaker may have been tripped.</li> <li>3. Surge suppressor may be faulty.</li> <li>4. The polarity may have be reversed on the surge suppressor's output connection to the product.</li> </ol>	<ol style="list-style-type: none"> <li>1. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>2. Check and switch on breaker.</li> <li>3. Check output voltage from surge suppressor. (Black is Neutral, White is Hot) Output voltage should be 167V DC. If ouput voltage is lower, contact your local distributor for replacement.</li> <li>4. Disconnect. Product warranty may have been voided, contact your local distributor.</li> </ol>
Some LEDs are not functional	<ol style="list-style-type: none"> <li>1. Product may have been bent excessively or bent on horizontal plane, potentially breaking connections.</li> <li>2. Product may have been connected directly to 120VAC without the surge suppressor.</li> <li>3. The polarity may have be reversed on the surge suppressor's output connection to the product.</li> </ol>	<ol style="list-style-type: none"> <li>1. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>2. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>3. Disconnect. Product warranty may have been voided, contact your local distributor.</li> </ol>
LEDs are flickering	<ol style="list-style-type: none"> <li>1. Product may have been bent excessively or bent on horizontal plane, potentially breaking connections</li> <li>2. Product may have been connected directly to 120VAC without the surge suppressor.</li> <li>3. The surge suppressor may not be connected to 120VAC circuit.</li> <li>4. Surge suppressor may be faulty.</li> <li>5. The polarity may have be reversed on the surge suppressor's output connection to the product.</li> <li>6. Product may be connected to an incompatible dimmer or home control.</li> </ol>	<ol style="list-style-type: none"> <li>1. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>2. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>3. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>4. Check output voltage from surge suppressor. (Black is Neutral, White is Hot) Output voltage should be 167V DC. If ouput voltage is lower, contact your local distributor for replacement.</li> <li>5. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>6. Connect surge suppressor to 120VAC and/or connect to recommended dimmers.</li> </ol>
LEDs have uneven color	<ol style="list-style-type: none"> <li>1. Product may have been painted over or covered with foreign substance.</li> <li>2. Product's operating temperature may have been exceeded.</li> <li>3. Product may have prolonged exposure to direct sunlight</li> </ol>	<ol style="list-style-type: none"> <li>1. Clean product with non-corrosive cleaners.</li> <li>2. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>3. Disconnect. Product warranty may have been voided, contact your local distributor.</li> </ol>
Some LEDs and intgral circuit chips appear oxidized with brown or green marks	<ol style="list-style-type: none"> <li>1. Product may have been submerged in puddle of water or snow for a period of time.</li> <li>2. Product may have been altered in field.</li> </ol>	<ol style="list-style-type: none"> <li>1. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>2. Disconnect. Product warranty may have been voided, contact your local distributor.</li> </ol>
Some LEDs and integral circuit chips appears charred	<ol style="list-style-type: none"> <li>1. Product may have been connected directly to 120VAC without the surge suppressor.</li> <li>2. The surge suppressor may not be connected to 120VAC circuit.</li> <li>3. The output polarity may have been reversed during installation.</li> <li>4. Product's operating temperature may have been exceeded.</li> </ol>	<ol style="list-style-type: none"> <li>1. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>2. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>3. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>4. Disconnect. Product warranty may have been voided, contact your local distributor.</li> </ol>
The outer jacket appears charred	<ol style="list-style-type: none"> <li>1. Product may have been energized when tighly coiled or when it was wound up in a spool.</li> <li>2. Product may have been energized when overlapped on itself or covered by other means.</li> </ol>	<ol style="list-style-type: none"> <li>1. Disconnect. Product warranty may have been voided, contact your local distributor.</li> <li>2. Disconnect. Product warranty may have been voided, contact your local distributor.</li> </ol>
Plastic mounting channel bowed	<ol style="list-style-type: none"> <li>1. Mounting channel may not have enough mounting screws installed.</li> </ol>	<ol style="list-style-type: none"> <li>1. Install mounting screws on mounting channel every 6 inches.</li> </ol>
LED strip fallen off CH-FX-41 metal channel	<ol style="list-style-type: none"> <li>1. Product may not be mounted with the correct mounting accessory.</li> </ol>	<ol style="list-style-type: none"> <li>1. Install mounting clips inside of metal channel every 6 inches.</li> </ol>
LED strip is too long or too short for installation	<ol style="list-style-type: none"> <li>1. Incorrect measurements may be given to factory for production.</li> </ol>	<ol style="list-style-type: none"> <li>1. Contact your local distributor. Do not attempt to splice or field shorten the product. Doing so will void product warranty and UL safety.</li> </ol>



DL-AC-FLEX-ODF






INFINA® LED FLEXIBLE LINEAR  
AC FLEXIBLE LINEAR STRIP

PATENT NO.:9,671,075  
PATENT NO.:9,746,144



Type	
Project	
Catalog No.	

## OUTDOOR HARDWIRE INSTALLATION INSTRUCTIONS

# CAUTION



### HARDWIRE CONNECTION WIRING




INFINA®

INCORRECT BRANCH CIRCUIT CONNECTION WILL VOID THE WARRANTY OF THE PRODUCT



ON-BOARD COMPONENTS ARE SCEPTIBLE TO DAMAGE FROM INCORRECT WIRING

### OUTDOOR



**FLEXIBLE CONDUIT ONLY**  
**MAKE SURE ALL CONNECTIONS ARE SEALED AND WATER TIGHT**

- DO NOT SUBMERGE IN LIQUID OR IN AREAS WHERE WATER WILL PUDDLE
- DO NOT INSTALL NEAR AREAS WITH EXPOSURE TO SALT WATER OR CHLORINATED WATER



**NOTE:** Avoid installing at locations with prolonged exposure to direct sunlight to prevent extended heat buildup and to prevent irreversible damages on the LED.

## WARRANTY IS VOID IF ANY OF THE ABOVE ARE VIOLATED

A 5 YEAR LIMITED WARRANTY for applications that necessitate up to 16 consecutive operational hours per 24 hour period.  
A 2 YEAR LIMITED WARRANTY for applications that necessitate more than 16 consecutive operational hours per 24 hour period.

**JESCO**  
LIGHTING GROUP

www.jescolighting.com  
support@jescolighting.com  
Tech Support: 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
Main Line: 800.527.7796  
Fax Line: 855.265.5768

219 South 6th Ave  
City of Industry, CA 91746  
Main Line: 855.654.0110  
Fax Line: 626.333.2955

