



LED INDOOR SHELF AND COUNTER SERIES S700



Shelf and Counter Series S700


1/4" thick by 1" wide flush mounted and adjustable,
high output LED linear strips



- Operating current: 350mA
- Watts consumed: 2 – 8W
- Special heat control / water-proof
- Material: Solid matte aluminum
- Wiring: 24AWG with 1/4"Ø plug
- IP54 Class II


S701-08-2X1-30 ○
40 ○
50 ○

2 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Mounts flush to surface
Lamp life 50,000 hours

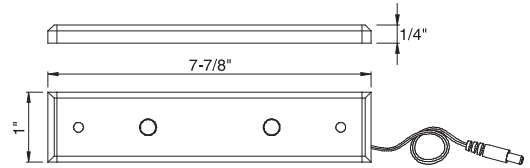


S702-08-2X1-30 ○
40 ○
50 ○

2 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Brackets mount flush to surface with
full accent adjustability
Lamp life 50,000 hours

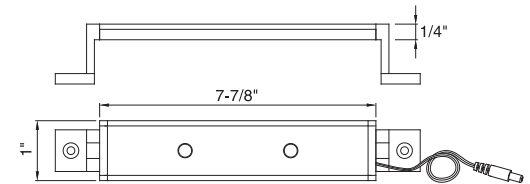

S701-08-3X1-30 ○
40 ○
50 ○

3 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Mounts flush to surface
Lamp life 50,000 hours

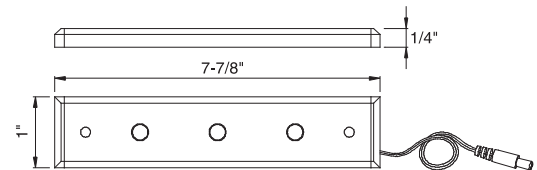




Applications

- In cabinet
- Shelf lighting
- Retail counters
- Trade show and exhibition booths
- Residential furnishings


S702-08-3X1-30 ○
40 ○
50 ○

3 White 1W LEDs
 Beam spread angle: 110°
 Available in 3 white color ranges
 Anodized aluminum frame
 Clear lens
 Brackets mount flush to surface
 with full accent adjustability
 Lamp life 50,000 hours

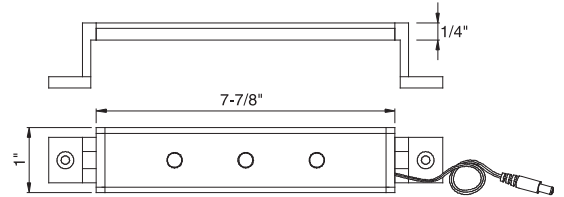


S701-15-3X1-30 ○
40 ○
50 ○

3 White 1W LEDs
 Beam spread angle: 110°
 Available in 3 white color ranges
 Anodized aluminum frame
 Clear lens
 Mounts flush to surface
 Lamp life 50,000 hours

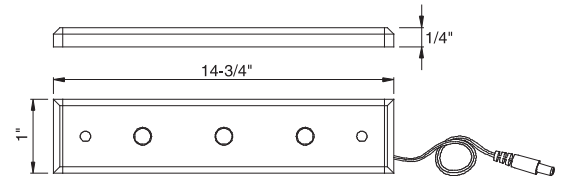

S702-15-3X1-30 ○
40 ○
50 ○

3 White 1W LEDs
 Beam spread angle: 110°
 Available in 3 white color ranges
 Anodized aluminum frame
 Clear lens
 Brackets mount flush to surface
 with full accent adjustability
 Lamp life 50,000 hours

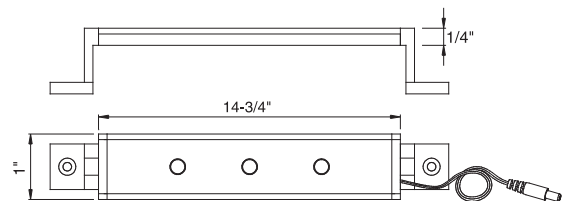

-30: ○ Warm white 3000K range **-40:** ○ Standard white 4000K range **-50:** ○ Cool white 5000K range

Shelf and Counter Series S700


1/4" thick by 1" wide flush mounted and adjustable,
high output LED linear strips



- Operating current: 350mA
- Watts consumed: 2 – 8W
- Special heat control / water-proof
- Material: Solid matte aluminum
- Wiring: 24AWG with 1/4"Ø plug
- IP54 Class II


S701-15-5X1-30 ○
40 ○
50 ○

5 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Mounts flush to surface
Lamp life 50,000 hours

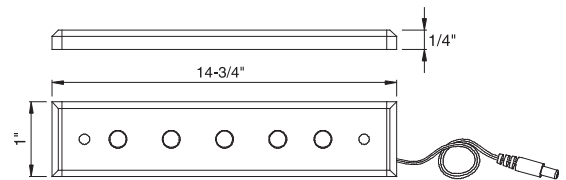


S702-15-5X1-30 ○
40 ○
50 ○

5 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Brackets mount flush to surface with
full accent adjustability
Lamp life 50,000 hours

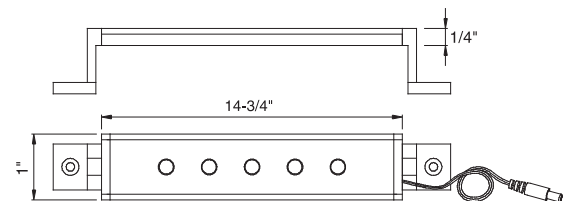

S701-18-3X1-30 ○
40 ○
50 ○

3 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Mounts flush to surface
Lamp life 50,000 hours

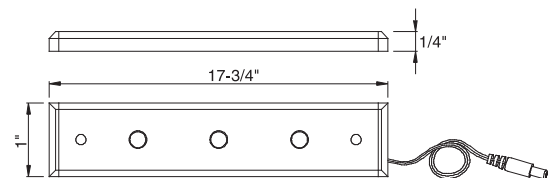



Applications


- In cabinet
- Shelf lighting
- Retail counters
- Trade show and exhibition booths
- Residential furnishings

S702-18-3X1-30 ○

40 ○

50 ○

3 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Brackets mount flush to surface
with full accent adjustability
Lamp life 50,000 hours

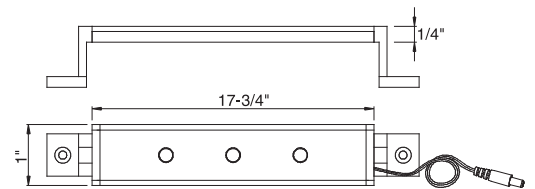


S701-18-5X1-30 ○

40 ○

50 ○

5 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Mounts flush to surface
Lamp life 50,000 hours

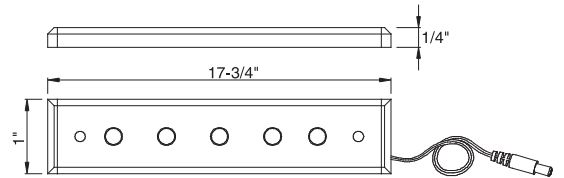


S702-18-5X1-30 ○

40 ○

50 ○

5 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Brackets mount flush to surface
with full accent adjustability
Lamp life 50,000 hours

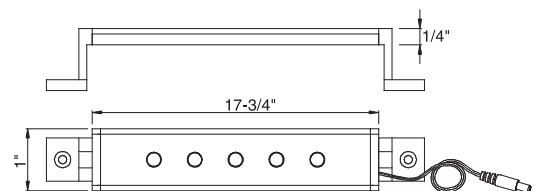

-30: ○ Warm white 3000K range -40: ○ Standard white 4000K range -50: ○ Cool white 5000K range

Shelf and Counter Series S700


1/4" thick by 1" wide flush mounted and adjustable,
high output LED linear strips



- Operating current: 350mA
- Watts consumed: 2 – 8W
- Special heat control / water-proof
- Material: Solid matte aluminum
- Wiring: 24AWG with 1/4"Ø plug
- IP54 Class II


S701-24-8X1-30 ○
40 ○
50 ○

8 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Mounts flush to surface
Lamp life 50,000 hours

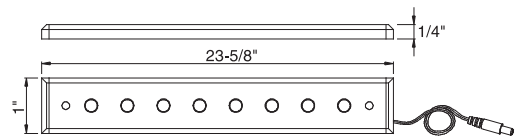

S702-24-8X1-30 ○
40 ○
50 ○

8 White 1W LEDs
Beam spread angle: 110°
Available in 3 white color ranges
Anodized aluminum frame
Clear lens
Brackets mount flush to surface with
full accent adjustability
Lamp life 50,000 hours

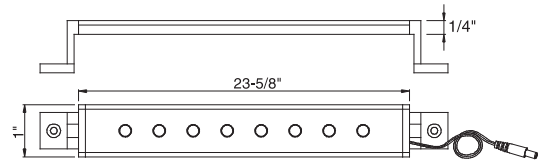

-30: ○ Warm white 3000K range -40: ○ Standard white 4000K range -50: ○ Cool white 5000K range



Applications

- In cabinet
- Shelf lighting
- Retail counters
- Trade show and exhibition booths
- Residential furnishings

Accessories:

Plug-in Connector Box



ACC-JC4

1-7/8"L x 1-3/4"W x 3/4"H
(Screw-down tabs extend length by 3/8" each side)

Transformer/Driver



TRANS-CC-11W

4-1/4"L x 2-1/2"W x 1-1/8"H
(Screw-holes are inset)

- 1: Mount fixture(s).
- 2: Plug-in the fixture's 15' cable with RCA type plug into the ACC-JC4 inter-connection box (more than 1 fixture can be plugged-in to the same box).
- 3: Plug-in connect ACC-JC4 to the TRANS-CC-11W with cable provided.
- 4: 120V AC direct wire connect power to the TRANS-CC-11W 350mA transformer/driver.

Power load is 1W per LED.

Model #	Color Temperature Option	ACC-JC4 (Plug-in J-Box)	TRANS-CC-11W (350mA Transformer/Driver)	Driver Powers:
S701-08-2X1	-30/-40/-50	●	●	1 to 4 units
S702-08-2X1	-30/-40/-50	●	●	1 to 4 units
S701-08-3X1	-30/-40/-50	●	●	1 to 3 units
S702-08-3X1	-30/-40/-50	●	●	1 to 3 units
S701-15-3X1	-30/-40/-50	●	●	1 to 3 units
S702-15-3X1	-30/-40/-50	●	●	1 to 3 units
S701-15-5X1	-30/-40/-50	●	●	1 to 2 units
S702-15-5X1	-30/-40/-50	●	●	1 to 2 units
S701-18-3X1	-30/-40/-50	●	●	1 to 3 units
S702-18-3X1	-30/-40/-50	●	●	1 to 3 units
S701-18-5X1	-30/-40/-50	●	●	1 to 2 units
S702-18-5X1	-30/-40/-50	●	●	1 to 1 units
S701-24-8X1	-30/-40/-50	●	●	1 unit
S702-24-8X1	-30/-40/-50	●	●	1 unit

Safety Plug



ACC-CP-403

A set of 4 ACC-CP-403 is included the ACC-JC4 inter-connection box. Only use this item number to order replacements if needed. These are protective covers provided for the RCA type adapter receptacles in the ACC-JC4.



All Series 700 strips come with 15' of pre-wired cable with RCA type adapter. Wiring and construction is IP54 rated.



JESCO

LIGHTING GROUP

NEW YORK

66-25 Traffic Avenue
Glendale, NY 11385
Tel. 718.366.3211
Toll Free 800.527.7796
Fax 718.366.3646

LOS ANGELES

1100 Hatcher Avenue, Suite A
City of Industry, CA 91748
Tel. 626.854.8168
Toll Free 866.473.5840
Fax 626.854.8172

Email: info@jescoled.com
www.jescoled.com
www.jescolighting.com

JESCO LIGHTING is a UL and ETL Listed company.
© 2007 JESCO LIGHTING. All rights reserved.

Colormotion, the LED division of
Jesco Lighting Group, is now changing
its brand name to Jesco LED Lighting
Solutions® (J•LED®)