


LED LIGHTING SOLUTIONS



JESCO
LIGHTING GROUP



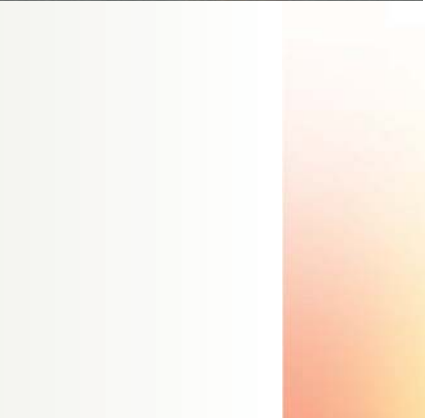

LED lighting is rapidly changing from purely decorative lighting output and product types, to working solutions for both residential and commercial lighting applications. In this release J•LED focuses on two areas of lighting that benefit the owner. These LED fixtures provide useful light levels replacing traditional incandescent and compact fluorescent fixtures. These new LED fixtures offer significant reduction in energy consumption, their longer life reduces maintenance costs, eliminate UV, work without environmentally-unfriendly chemicals like the mercury in fluorescents, while adding sophistication and beauty to the lighting of a space.

Using incandescent or fluorescent types today all too often actually overlights the space being lit; a problem typically solved with dimming, which increases overall product and installation costs. Incandescent lamps normally used in similar fixture types vary from 750 to 4,000 hours of life. Compact fluorescent types offer typically up to 10,000. In either case, the LED lamps used by Jesco Lighting Group's J•LED design staff outperform both incandescent and fluorescent types with an average 70,000 hours of operating life using the LED's selected for the fixtures in this catalog release. This saves the owner not only lamp replacement costs, but also significantly saves in the cost of electrical contractor lamp change-out labor. In addition, a major problem with too many incandescent and fluorescent types is heat production. The heat they produce often breaks down the finishing of the wood shelves and cabinets where they are installed. This high-heat production also significantly reduces their published lamp life. The LED products in this catalog have all been designed to control heat to avoid a



decrease in life, and so that they produce only a fraction of the heat of traditional lamps, protecting the materials around them. This again adds to the owner's savings. Importantly, LED's are a green product, reducing environmental impact as they do not include key chemicals affecting our planet that other lamps need to functionally create light. For many applications LED type solutions are simply better in every way you can measure.

Of real significance is the availability of colors. In a restaurant a set of LED types recessed in walls can create a beautiful, soft colored glow, one that can be matched in aisle and step lighting, under counter and over shelves, and that can be matched to other J•LED linear LED lighting products for cove lighting. All of this creating truly unique contemporary design opportunities for the interior designer, while saving the owner both electrical and operating costs.


Due to technology changes over the last two years, more and more light output is being created by LED lamped fixtures. Based on the rapidly growing use of LED lamps by architects and interior designers, while performance qualities have increased, costs have been decreasing rapidly. In this first major release of our three planned J•LED Lighting Solutions releases, we feature lower cost LED lighting products designed to be simpler and lower-in-cost to install with outstanding plug-in wiring. All using the best in quality components, and offering the most modern and stylish design features. These products are perfect for residential and commercial applications.

Table of Contents




Product Matrix	2
OUTDOOR	
LED In-Ground Accents	3
LED Outdoor Mini Recessed Accents	7
LED Outdoor Recessed	10
LED Garden & Pathway Lights	14
LED Plant & Garden Accent Lights	18
LED Exterior Wall Sconces	19
Exterior Accessories	22
INDOOR	
LED Shelf, Counter & Cabinet Accents	23
LED Decorative Linear	27
Interior Accessories	29
Index	30

Product Matrix

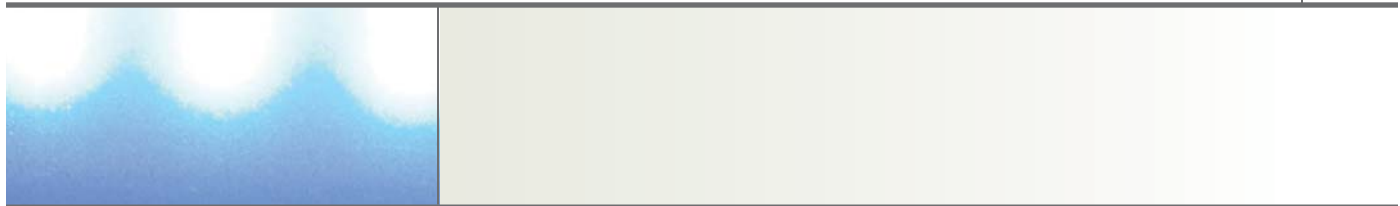

OUTDOOR

IN-GROUND Accent Series

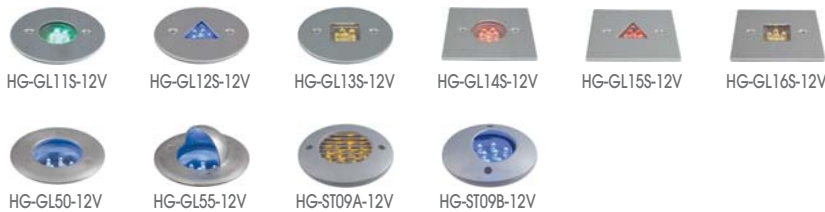

MINI-RECESSED Series



RECESSED Series



GARDEN & PATH Series



WALL Series



INDOOR

IN-CABINET UNDER SHELF Series



DECORATIVE LINEAR Series



J-LED Lighting Solutions has designed and manufactured all the units in this catalog to wire with simple plug-in connector systems. Consult your electrical engineer or contractor if, due to site conditions, you need to strip the connectors provided and use the bare wires in standard hard wiring boxes. These products are UL Listed with their connectors, but in most locations they are considered Class II types, allowing, using proper techniques and components, the modifications in the field required to best install them in a particular site condition. Such changes will not alter the UL registered status of the product if installed correctly and inspected properly for standard approvals.

LED In-Ground Accents

Recessed Fixtures for Gardens and Pathways



- Trim: Stainless Steel
- Housing: ABS Plastic
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)



Applications


In-ground garden, pathways, driveways, building side walls, outdoor night-time safety and security.

Features

- For in-ground mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed


HG-GL11S-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)





HG-GL12S-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)



HG-GL13S-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)

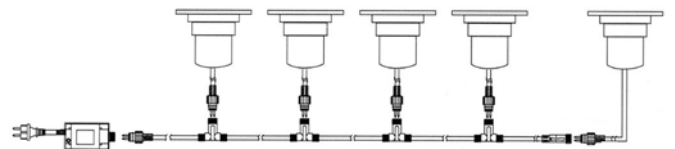

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED In-Ground Accents

Recessed Fixtures for Gardens and Pathways



- Trim: Stainless Steel
- Housing: ABS Plastic
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)




Applications

In-ground garden, pathways, driveways, building side walls, outdoor night-time safety and security.


Features

- For in-ground mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed



HG-GL14S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-GL15S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-GL16S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)

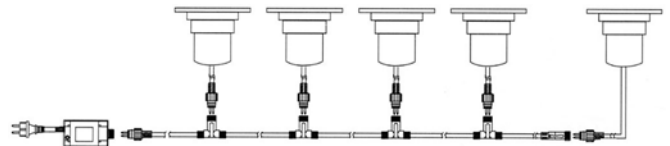

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED In-Ground Accents

Recessed Fixtures for Gardens and Pathways



- Trim: Stainless Steel
- Housing: Coated Steel
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)



HG-GL50-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-GL55-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

In-ground garden, pathways, driveways, building side walls, outdoor night-time safety and security.

Features

- For in-ground mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

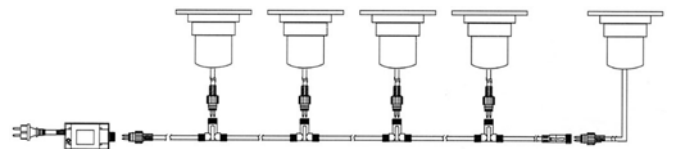

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED In-Ground Accents


Low Glare Pathway Lighting




- Trim: Die Cast
- Housing: Die Cast
- LED Count: 12 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.72W (0.06W per lamp)



HG-ST09A-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-ST09B-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

In-ground garden, pathways, driveways, building side walls, outdoor night-time safety and security.

Features

- For in-ground mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

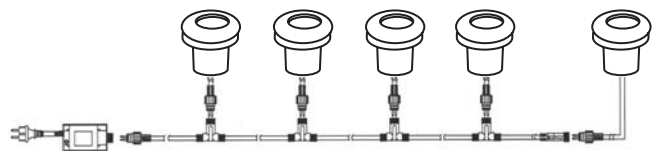

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Outdoor Mini Recessed


Detailed Lighting Accents




- Trim: Die Cast
- Housing: ABS Plastic
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)




HG-DL11S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-DL12S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-DL13S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

Decorative accents for building exteriors and interiors. Exterior fences, walls, pathways, and steps; interior aisles, corridors, and coves. May be mounted in floors outside of traffic areas.

Features

- For in-ground or wall mounting
- Frosted lens available by special order*
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

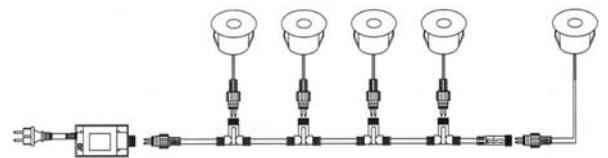

* If ordering frosted lensed units, please add **F** at the end of Model code.

Example: **HG-DL11S-12V-R** (Red, clear lens)

HG-DL11S-12V-RF (Red, frosted lens)

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Outdoor Mini Recessed


Detailed Lighting Accents




- Trim: Die Cast
- Housing: ABS Plastic
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)




HG-DL14S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-DL15S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-DL16S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

Decorative accents for building exteriors and interiors. Decorative delineators for exterior fences, walls, pathways, and steps; interior aisles, corridors, and coves. May be mounted in floors outside of traffic areas.

Features

- For in-ground or wall mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

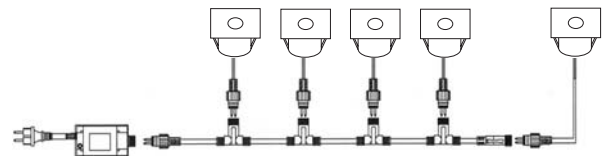

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Outdoor Mini Recessed


Detailed Lighting Accents




- Trim: Die Cast
- Housing: ABS Plastic
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)



HG-DL48-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-DL49-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

Decorative accents for building exteriors and interiors. Decorative delineators for exterior fences, walls, pathways, and steps; interior aisles, corridors, and coves. May be mounted in floors outside of traffic areas.

Features

- For in-ground or wall mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

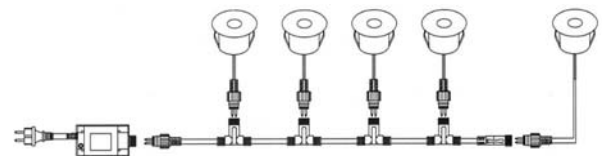

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Outdoor Recessed

Decorative and Safety. Aisle and step.



- Trim: Die Cast
- Housing: Die Cast
- LED Count: Varies depending on unit
- Light Output: 33 lm/W
- Beam Angle: 120°
- Volt: 12V
- Watt: 0.06W per lamp



Applications


Building and fence side walls, entries, steps, corridors, aisle-ways, decks, and porches.

Features

- For wall mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

HG-ST08L-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)




15 LED Module
Total watt: 0.9



HG-ST08M-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)




12 LED Module
Total watt: 0.72




HG-ST08S-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)



9 LED Module
Total watt: 0.54

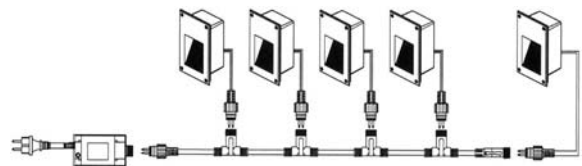

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Outdoor Recessed

Decorative and Safety. Porches and Decks.



- Trim: Die Cast
- Housing: Die Cast
- LED Count: 12 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.72W (0.06W per lamp)




Applications

Building and fence side walls, entries, steps, corridors, aisle-ways, decks, and porches.


Features

- Wall, ceiling, or floor mounting
- Tool-less installation
- Available with clear or frosted lens*
- Average operating life: 70,000 hours*
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed



HG-RL01A-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-RL01B-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



HG-RL01C-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)

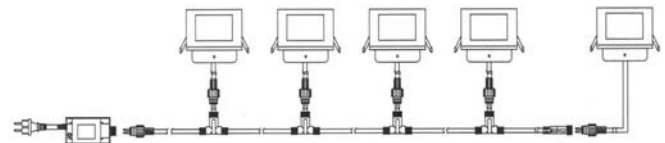

* If ordering frosted lensed units, please add **F** at the end of Model code.

Example: **HG-RL01C-12V-R** (Red, clear lens)

HG-RL01C-12V-RF (Red, frosted lens)

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Outdoor Recessed

Low Glare Pathway or Decorative Lighting



- Trim: Die Cast
- Housing: Die Cast
- LED Count: 15 Lamps
- Light Output: 33 lm/W
- Beam Angle: 120°
- Volt: 12V
- Watt: 0.9W (0.06W per lamp)







Applications

Interior or exterior applications. Building and fence side walls, entries, steps, corridors, pathways, decks, and porches.

Features

- Wall or floor mounting
- Available with frosted or clear lens*
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

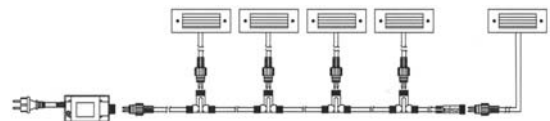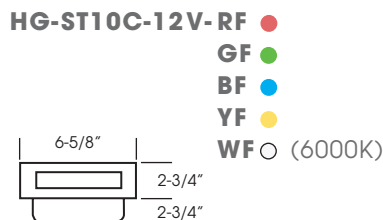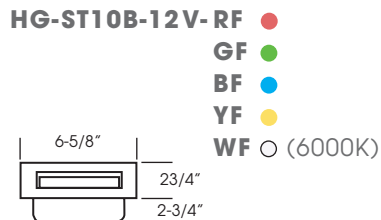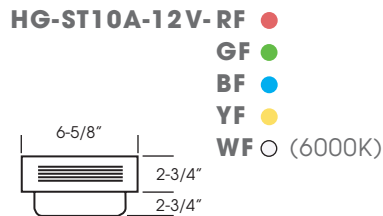

* If ordering clear lensed units, please delete **F** at the end of Model code.
 Example: **HG-ST10C-12V-BF** (Blue, frosted lens)
HG-ST10C-12V-B (Blue, clear lens)

Outdoor-use transformers, harnesses, and connecting cables on page 22

LED Outdoor Recessed

Low Glare Pathway or Decorative Lighting



- Trim: Die Cast
- Housing: Die Cast
- LED Count: 15 Lamps
- Light Output: 33 lm/W
- Beam Angle: 120°
- Volt: 12V
- Watt: 0.9W (0.06W per lamp)



Applications


Interior or exterior applications. Building and fence side walls, entries, steps, corridors, pathways, decks, and porches.

Features

- Wall or floor mounting
- Available with frosted or clear lens*
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed


HG-ST10D-12V-RF ●

- GF ●
- BF ●
- YF ●
- WF ○ (6000K)





HG-ST10E-12V-RF ●

- GF ●
- BF ●
- YF ●
- WF ○ (6000K)



HG-ST10F-12V-RF ●

- GF ●
- BF ●
- YF ●
- WF ○ (6000K)

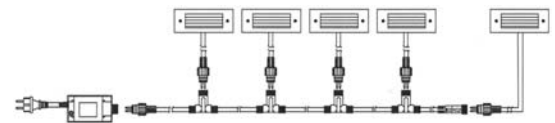

* If ordering clear lensed units, please delete **F** at the end of Model code.
Example: **HG-ST10D-12V-YF** (Yellow, frosted lens)
HG-ST10D-12V-Y (Yellow, clear lens)

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Garden & Pathway

Porch/Deck Mount or In-Ground



- Construction: Stainless Steel with Plastic Lens
- LED Count: 3 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.18W (0.06W per lamp)



HG-GBS3D-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)





Applications

Gardens, decks, driveways and pathways.

Features

- In-ground or floor mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

HG-GBS3S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)

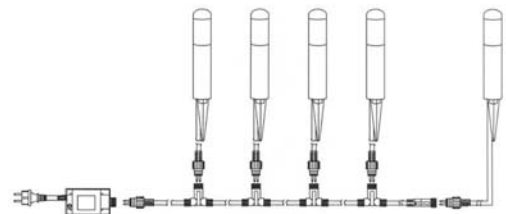

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Garden & Pathway

Porch/Deck Mount or In-Ground



- Construction: Stainless Steel with Glass Lens
- LED Count: 3 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.18W (0.06W per lamp)



Applications


Gardens, decks, driveways and pathways.

Features

- In-ground or floor mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed



HG-GBS4D-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)

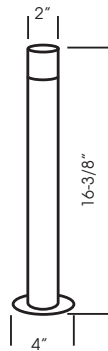

HG-GBS4S-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)

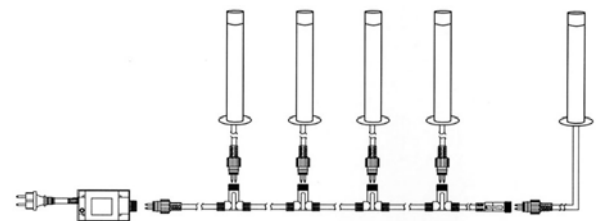

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Garden & Pathway


In-Ground



- Construction: Stainless Steel with Plastic Lens
- LED Count: 3 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.18W (0.06W per lamp)



HG-GB556S-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)

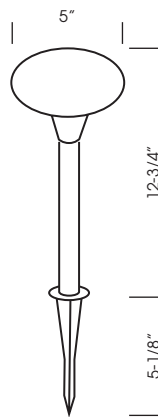


Applications

Gardens and pathways.

Features

- In-ground or floor mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

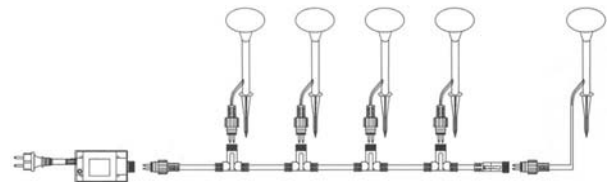

Mounts with spike. For screw mounting order **HG-GB556-12V-** followed by color output.

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Garden & Pathway

In-Ground



- Construction: Stainless Steel with Molded Acrylic Tip
- LED Count: 1 Lamp
- Light Output: 33 lm/W
- Beam Angle: 15°
- Volt: 12V
- Watt: 0.06W



HG-GLS23-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

Gardens and pathways.

Features

- In-ground or floor mounting
- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

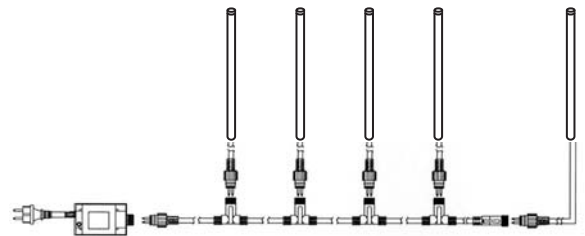

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Plant & Garden Accent

Indoor/Outdoor Floral Accent




- Construction: Molded Stone
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 20°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)



HG-GE7D-12V-OW-R ●
 G ●
 B ●
 Y ●
 W ○ (6000K)



HG-GE7D-12V-GN-R ●
 G ●
 B ●
 Y ●
 W ○ (6000K)



HG-GE7D-12V-BN-R ●
 G ●
 B ●
 Y ●
 W ○ (6000K)



HG-GE7D-12V-BK-R ●
 G ●
 B ●
 Y ●
 W ○ (6000K)



HG-GE7D-MR ● Black




Applications

Decorative accents for building exterior and interior vased or crated decorative florals, walls, shelves, decorative delineators for interiors, jewelry, and display cases.

Features

- Includes 20" lead wire with bi-pin plug-in waterproof socket
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

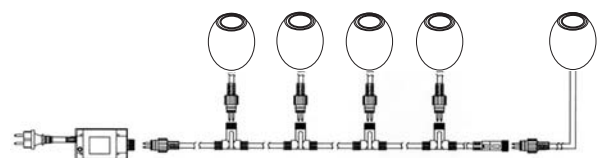

Outdoor-use transformers, harnesses, and connecting cables on page 22.

LED Exterior Wall Sconces


Entries and Walls




- Housing: Die Cast Metal
- LED Count: 19 Lamps
- Light Output: 33 lm/W
- Beam Angle: 120°
- Volt: 12V
- Watt: 1.14W (0.06W per lamp)



HG-EL20-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)

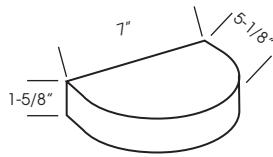

HG-EL20P-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)

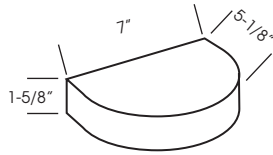

Applications

Decorative accents for building exterior.
Excellent security overnight lighting.

Features

- Available with diffused lens or with clear acrylic lens
- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

Top View




IP65 Outdoor transformer included in housing. Wire the housing directly to 120v power feeds. Contractor to use junction-box appropriate for site location.

LED Exterior Wall Sconces

Entries and Walls




- Construction: Die Cast Metal, Glass
- LED Count: 3 or 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 150°
- Volt: 12V
- Watt: 0.06W per lamp

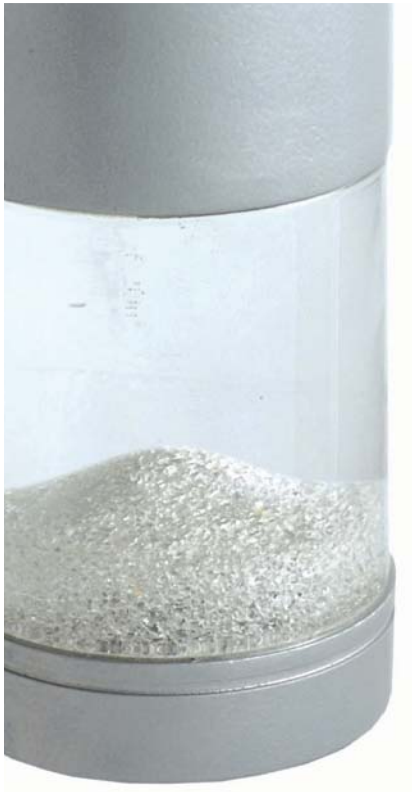

HG-EL611-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)



3 LED Unit
Total watt: 0.18



Applications


Decorative accents for building exterior.
Excellent security overnight lighting.

Features

- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

HG-EL612-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)

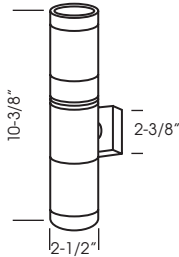

6 LED Unit
Total watt: 0.36



IP65 Outdoor transformer included in housing. Wire the housing directly to 120v power feeds. Contractor to use junction-box appropriate for site location.

LED Exterior Wall Sconces

Entries and Walls




- Construction: Die Cast Metal, Glass
- LED Count: 6 or 12 Lamps
- Light Output: 33 lm/W
- Beam Angle: 150°
- Volt: 12V
- Watt: 0.06W per lamp



HG-EL621-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)



6 LED Unit
Total watt: 0.36



Applications


Decorative accents for building exterior.
Excellent security overnight lighting.

Features

- Average operating life: 70,000 hours
- IP65 waterproof fixtures may be used in outdoor locations having regular drainage. Should not be submerged in water.
- C-UL listed

HG-EL622-12V-R ●

- G ●
- B ●
- Y ●
- W ○ (6000K)

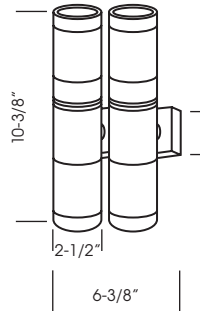

12 LED Unit
Total watt: 0.72



IP65 Outdoor transformer included in housing. Wire the housing directly to 120v power feeds. Contractor to use junction-box appropriate for site location.

Exterior Accessories

IP65 Transformers, Harnesses and Connecting Cables




TRANS12W-OD

Transformer for up to 7 units. 12W transformer with extension cable.




HARNESS2-OD

2-Light Harness. 80" Plug-in lead 18AWG IP65 (waterproof connectors).




HARNESS3-OD

3-Light Harness. 120" Plug-in lead 18AWG IP65 (waterproof connectors).




HARNESS5-OD

5-Light Harness. 200" Plug-in lead 18AWG IP65 (waterproof connectors).



HARNESS7-OD

7-Light Harness. 280" Plug-in lead 18AWG IP65 (waterproof connectors).



CONNECT2-24-OD

24" 18AWG IP65 plug-in connecting cable.



CONNECT2-36-OD

36" 18AWG IP65 plug-in connecting cable.



All Outdoor fixture types can be used in indoor applications. All J-LED new products in this release have a C-UL Listing (Canada and the United States).

LED Shelf, Counter, & Cabinet Accent


Interior High Output Accents



- Trim Finish: Choice of finish
- LED Count: 19 Lamps
- Light Output: 33 lm/W
- Beam Angle: 25°
- Volt: 12V
- Watt: 1.14W (0.06W per lamp)



- H-SL47-12V-R-S** ● Matte Silver Trim
G-S ● Matte Silver Trim
B-S ● Matte Silver Trim
Y-S ● Matte Silver Trim
W-S ○ Matte Silver Trim




- H-SL47-12V-W-B** ○ Black Trim
W-C ○ Chrome Trim
W-G ○ Gold Trim
W-W ○ White Trim

Applications

Display shelves, cabinet lighting, decorative accent or effect.

Features

- Molded plastic base with molded plastic mounting ring
- For recessed mounting
- Includes 18" lead wire with bi-pin snap-together AMP connector
- Average operating life: 70,000 hours
- IP44 damp location listing for interior applications only
- C-UL listed

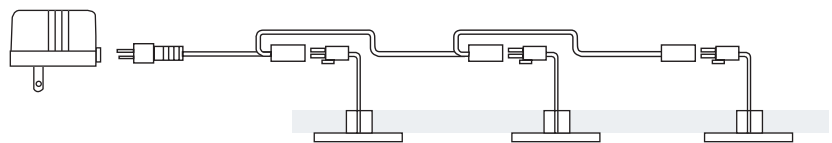

Indoor-use transformers, harnesses, connecting cables and wiring diagrams on page 29.

LED Shelf, Counter & Cabinet Accent

Interior Mini Recessed Accents



- Trim Finish: Satin Steel
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 25°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)



H-RH48L-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



H-RH49L-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



H-RH50L-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

Display shelves, cabinet lighting, decorative accent or effect.

Features

- Stainless steel trim and housing
- Available with clear or frosted lens*
- For recessed mounting
- Recessed mounting springs – no tools required
- Includes 18" lead wire with bi-pin snap-together AMP connector
- Average operating life: 70,000 hours
- IP44 damp location listing for interior applications only
- C-UL listed

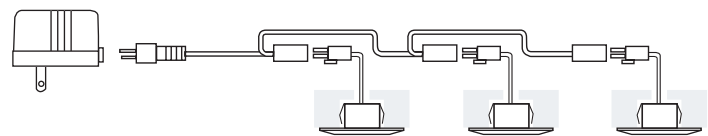

* If ordering frosted lensed units, please add **F** at the end of Model code.

Example: **H-RH50L-12V-W** (White, clear lens)

H-RH50L-12V-WF (White, frosted lens)

Indoor-use transformers, harnesses, connecting cables and wiring diagrams on page 29.

LED Shelf, Counter, & Cabinet Accent

Interior Decorative Wall and Shelf Accents




- Trim: Beveled Glass
- Housing: Die Cast Metal
- LED Count: 12 Lamps
- Light Output: 33 lm/W
- Beam Angle: 15°
- Volt: 12V
- Watt: 0.72W (0.06W per lamp)




H-DB130-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



H-DB131-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)



H-DB132-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

Display shelves, cabinet lighting, decorative accent or effect, surface mounted with plug-in wiring.

Features

- Tempered clear glass with beveled edge – Center glass over LEDs is lightly frosted
- For surface mounting
- Includes 18" lead wire with bi-pin snap-together AMP connector
- Average operating life: 70,000 hours
- IP44 damp location listing for interior applications only
- C-UL listed

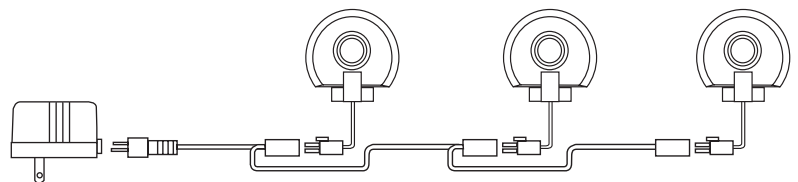

Indoor-use transformers, harnesses, connecting cables and wiring diagrams on page 29.

LED Shelf, Counter, & Cabinet Accent


Interior Decorative Wall and Shelf Light



- Trim Finish: Satin Steel
- LED Count: 6 Lamps
- Light Output: 33 lm/W
- Beam Angle: 90°
- Volt: 12V
- Watt: 0.36W (0.06W per lamp)



H-L31-PK300L-12V-R ●
G ●
B ●
Y ●
W ○ (6000K)




Applications

Display shelves, cabinet lighting, decorative accent or effect, mounted with plug-in wiring on surface or recessed.

Features

- Die formed metal housing and pop-out LED disk with clear glass lens
- When surface mounted the fixture angles the lamp aim at 30° off center
- Includes 18" lead wire with bi-pin snap-together AMP connector
- Average operating life: 70,000 hours
- IP44 damp location listing for interior applications only
- C-UL listed

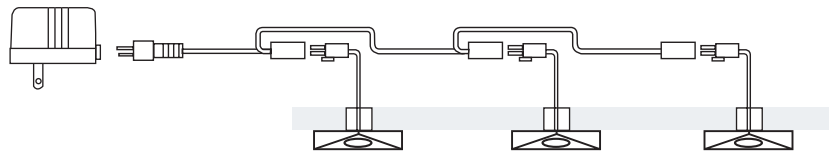

Indoor-use transformers, harnesses, connecting cables and wiring diagrams on page 29.

LED Decorative Linear Shelf

Interior Simple Plug-in Side-glow Shelf



- LED Count: Varies depending on shelf length
- Light Output: 33 lm/W
- Beam Angle: 15°
- Volt: 12V
- Watt: 0.06W per lamp



Applications

Display shelves, bar and restaurant, retail decorative accent or effect.

Features

- Tempered clear glass with beveled etched edges. Only the edges light up. Bent formed aluminum brackets
- Working shelf when correctly mounted to a wall
- Mounts on surface with plug-in wiring
- Includes 18" lead wire with bi-pin snap-together AMP connector
- Average operating life: 70,000 hours
- IP44 damp location listing for interior applications only
- C-UL listed

H-SHELF22-24- R ●
G ●
B ●
Y ●
W ○ (6000K)

24" long shelf
 15 lamps
 Total watt: 0.9




H-SHELF22-32- R ●
G ●
B ●
Y ●
W ○ (6000K)

32" long shelf
 20 lamps
 Total watt: 1.2



H-SHELF22-40- R ●
G ●
B ●
Y ●
W ○ (6000K)

40" long shelf
 25 lamps
 Total watt: 1.5

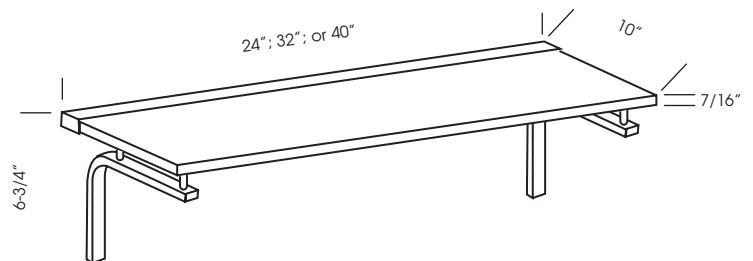

Indoor-use transformers, harnesses, connecting cables and wiring diagrams on page 29.

LED Decorative Linear Accent

Interior Simple Plug-in Light Strip



- Trim: Aluminum
- LED Count: 27 Lamps
- Light Output: 33 lm/W
- Beam Angle: 15°
- Volt: 3.4V DC (800mA)
- Watt: 1.62W (0.06W per lamp)





Applications

Display shelves, cabinet lighting, decorative accent or effect.

Features

- Beam output creates "lines and/or spots" of visible brightness. This is NOT a washlight. It is a linear accent.
- Mounts with plug-in wiring on surface or recessed
- Includes 18" lead wire with bi-pin snap-together AMP connector
- Average operating life: 70,000 hours
- IP44 damp location listing for interior applications only
- C-UL listed

- H-UC111-R** ●
- G** ●
- B** ●
- Y** ●
- W5** ○ (5000K)
- W3** ○ (3000K)

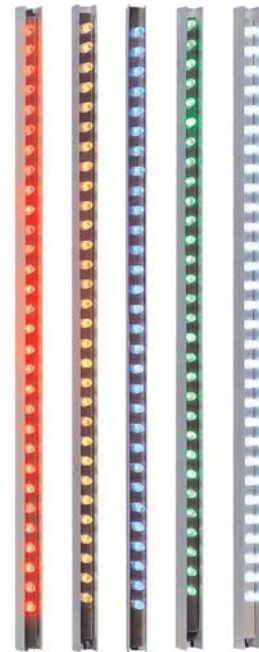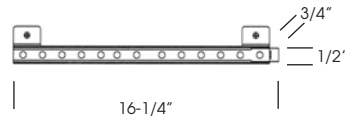


Accessories

H-UC111-TRANS
H-UC111-CC48

Transformer (Powers up to 6 units) Output 18V 1000MA
48" Transformer to first strip harness cable with mini plug-in connector. 22 AWG, IP44

H-UC111-6
H-UC111-12
H-UC111-18
H-UC111-24

6" Interconnect Joiner Cable
12" Interconnect Joiner Cable
18" Interconnect Joiner Cable
24" Interconnect Joiner Cable

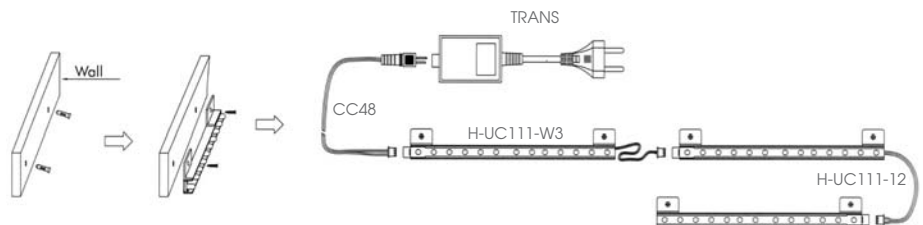


Interior Accessories

Transformers, Harnesses




TRANS300MA

Transformer for up to 3 units. 300MA




TRANS500MA

Transformer for up to 5 units. 500MA




TRANS700MA

Transformer for up to 7 units. 700MA




HARNESS2-ID

2-Light Harness. Amp connector with 88" cable.




HARNESS3-ID

3-Light Harness. Amp connector with 132" cable.




HARNESS5-ID

5-Light Harness. Amp connector with 204" cable.



HARNESS7-ID

7-Light Harness. Amp connector with 276" cable.



CONNECT1-24-ID

24" Connecting cable.



CONNECT1-36-ID

36" Connecting cable.



All Indoor fixture types are IP44 damp location listed and have a C-UL listing.

Index



CONNECT1-24-ID29	HARNES5-OD22	HG-GL12S-12V3
CONNECT2-24-OD22	HARNES7-ID29	HG-GL13S-12V3
CONNECT1-36-ID29	HARNES7-OD22	HG-GL14S-12V4
CONNECT2-36-OD22	HG-DL11S-12V7	HG-GL15S-12V4
H-DB130-12V25	HG-DL12S-12V7	HG-GL16S-12V4
H-DB131-12V25	HG-DL13S-12V7	HG-GL50-12V5
H-DB132-12V25	HG-DL14S-12V8	HG-GL55-12V5
H-L31-PK300L-12V26	HG-DL15S-12V8	HG-GLS23-12V17
H-RH48L-12V24	HG-DL16S-12V8	HG-RL01A-12V11
H-RH49L-12V24	HG-DL48-12V9	HG-RL01B-12V11
H-RH50L-12V24	HG-DL49-12V9	HG-RL01C-12V11
H-SHELF22-2427	HG-EL20-12V19	HG-ST08L-12V10
H-SHELF22-3227	HG-EL20P-12V19	HG-ST08M-12V10
H-SHELF22-4027	HG-EL611-12V20	HG-ST08S-12V10
H-SL47-12V23	HG-EL612-12V20	HG-ST09A-12V6
H-UC11128	HG-EL621-12V21	HG-ST09B-12V6
H-UC111-628	HG-EL622-12V21	HG-ST10A-12V12
H-UC111-1228	HG-GB556S-12V16	HG-ST10B-12V12
H-UC111-1828	HG-GBS3D-12V14	HG-ST10C-12V12
H-UC111-2428	HG-GBS3S-12V14	HG-ST10D-12V13
H-UC111-CC4828	HG-GBS4D-12V15	HG-ST10E-12V13
H-UC111-TRANS28	HG-GBS4S-12V15	HG-ST10F-12V13
HARNES2-ID29	HG-GE7D-12V-BN18	TRANS12W-OD22
HARNES2-OD22	HG-GE7D-12V-BK18	TRANS300MA29
HARNES3-ID29	HG-GE7D-12V-GN18	TRANS500MA29
HARNES3-OD22	HG-GE7D-12V-OW18	TRANS700MA29
HARNES5-ID29	HG-GL11S-12V3		

JESCO LIGHTING GROUP LITERATURE

Track Lighting



Low Voltage Monorail Quick Adapt System Wall Sconces



Series 901/902 Metal Halide Track Lighting



Architectural Track Lighting



Residential & Commercial Track Lighting



Line Voltage Monorail

Recessed Downlights



ModuLinear Directional Lighting



Miniature Recessed Lighting 3" and 4" Aperture



Recessed Lighting 5" and 6" Aperture



Residential & Commercial Downlights

Decorative



Envisage Collection I



Envisage Collection II



Mul-T-Lite

Specialty Lighting



Sleek Plus



Display Lighting Solutions



Light Stix

J-LED Lighting Solutions




Illustrated Product Guide



LED Lighting Solutions



Sign Solutions



Custom LED

Outdoor



Outdoor

Other



Mini Catalog



Illustrated Product Guide

www.jescolighting.com

www.jescoled.com

www.envisagelighting.com

www.mul-t-lite.com



JESCO

LIGHTING GROUP

NEW YORK

66-25 Traffic Avenue
Glendale, NY 11385
Tel. 718.366.3211
Toll Free 800.527.7796
Fax 718.366.3646

LOS ANGELES

1100 Hatcher Avenue, Suite A
City of Industry, CA 91748
Tel. 626.854.8168
Toll Free 866.473.5840
Fax 626.854.8172

Email: info@jescoled.com
www.jescoled.com
www.jescolighting.com

JESCO LIGHTING is a UL and ETL Listed company.
© 2007 JESCO LIGHTING. All rights reserved.