




QAP405

QUICK ADAPT PENDANTS
LOW VOLTAGE

Type	
Project	
Catalog No.	

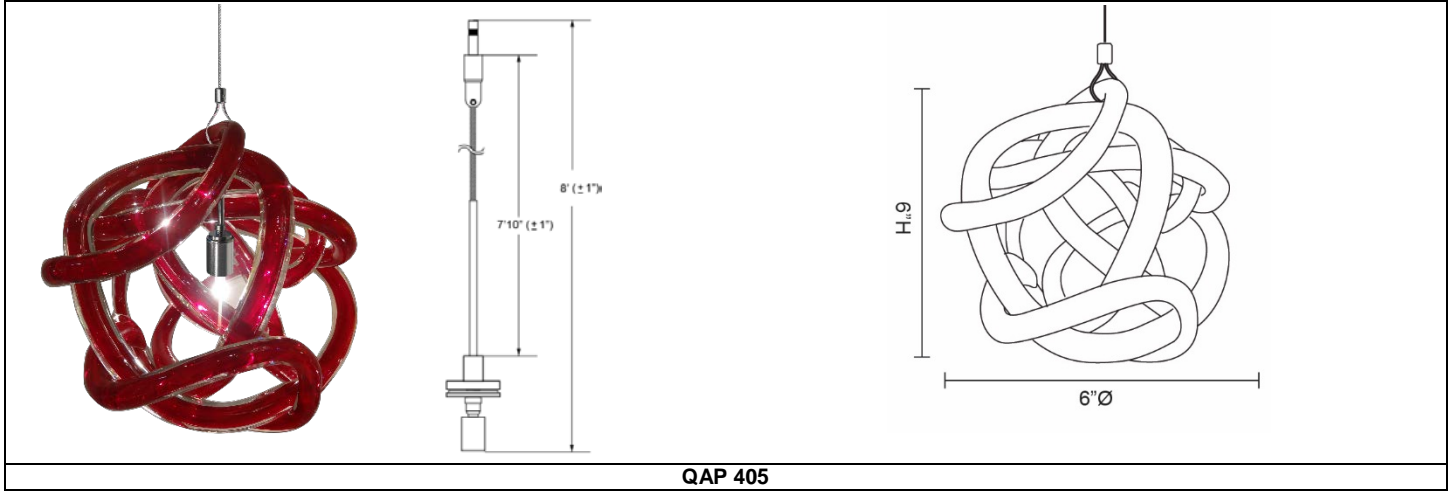

QAP 405

DESCRIPTION

Hand pull layered clear and color taffy glass knot. No two alike.

Quick Adapt Pendant includes a Quick Adapt Jack, 8' socket assembly, hang-straight tube, and Xenon Bi-Pin 12V 50W lamp. Cable may be field-cut.

May be used with JESCO Monorail Systems, Standard Track Systems, or with Monopoint/Multipoint Systems – See COMPATIBLE SYSTEMS.

SPECIFICATIONS

Input Voltage	12 VAC
Wattage	Up to 50W
Socket set	QASS32X (included and pre-installed)
Lamp*	Xenon Bi-Pin 12V 50W (included)
Dimensions	6"H x 6" Ø
Environment	Indoor - Dry
Certifications	ETL Listed

*Optional: 24V lamp, requires appropriate power supply (not supplied).

ORDERING INSTRUCTIONS

MODEL	-	GLASS FINISH	/	SOCKET FINISH
QAP405				
		BK – Black		CH – Chrome
		RD – Red		SN – Satin Nickel
		TE – Teal		
		WH – White		

Example: **QAP405-RD/CH**

COMPATIBLE SYSTEMS

MONOPOINT / MULTIPOINT SYSTEM



Quick Adapt Pendants may be directly mounted onto Monopoint or Multipoint canopies, which have built-in or remote transformer options.

STANDARD TRACK SYSTEM



The Standard Track Adapter MA-TA-H (sold separately) enables the use of Quick Adapt Pendants in Standard, Line Voltage H-Track Systems. Includes a 50W electronic transformer. Dimmable with an electronic or standard incandescent dimmer.

MONORAIL SYSTEM



The Monorail Fixture Adapter MA-FA (sold separately) provides the connection between the Quick Adapt Pendant to the Monorail.



QAP405

QUICK ADAPT PENDANTS
LOW VOLTAGE

Type	
Project	
Catalog No.	

The truly versatile combination of Quick Adapt Pendants surface-mounted on a JESCO Monopoint/Multipoint System enables a designer to fully customize and create a unique lighting solution in any space. Using the Quick Adapt Jack, any pendant may be easily inserted into the Mono/Multipoint canopies to create an individual spotlight, or creative groupings of cascading pendants.

Multipoint mounting is perfect for creating light over kitchen counters or illuminating tables. Select from a variety of single-light through four-light canopies in square, rectangular and round shapes, with integral or remote 12V transformers.



QAC-1R

Transformer: (1) 12V 50W Included
Dims: 5 1/8" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-2R

Transformer: (2) 12V 50W Included
Dims: 14 1/4" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-3R

Transformer: (3) 12V 50W Included
Dims: 24 1/8" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-4R

Transformer: (4) 12V 50W Included
Dims: 35 1/2" L x 3 1/2" W x 1 7/8" H
Finish: SN
 Supplied with square junction box cover plate



QAC-4S

Transformer: (4) 12V 50W Included
Dims: 10 3/8" L x 10 3/8" W x 1 7/8" H
Finish: SN



QAC-1C

Transformer: (1) 12V 50W Included
Dims: 4 1/2" Ø x 2" H
Finish: BZ, CH, SN



QAC-1C-RT

Transformer: (1) 12V 50W remote transformer required (sold separately)
Dims: 4 1/2" Ø x 3/8" H
Finish: BZ, CH, SN
 Supplied with 18" lead wire and 2 wire AMP connector. Built in Housing adjusts to ceiling thickness.



QAC-1C-RTH

Transformer: (1) 12V 50W remote transformer required (sold separately)
Dims: 2 1/8" Ø x 2" H
Finish: CH, SN
 Supplied with 18" lead wire and 2 wire AMP connector. Built in Housing adjusts to ceiling thickness.



QAC-3C

Transformer: (3) 12V 50W Included
Dims: 8" Ø x 2 1/4" H
Finish: CH, SN