




**QAP409**

**QUICK ADAPT PENDANTS**  
LOW VOLTAGE

Type	
Project	
Catalog No.	

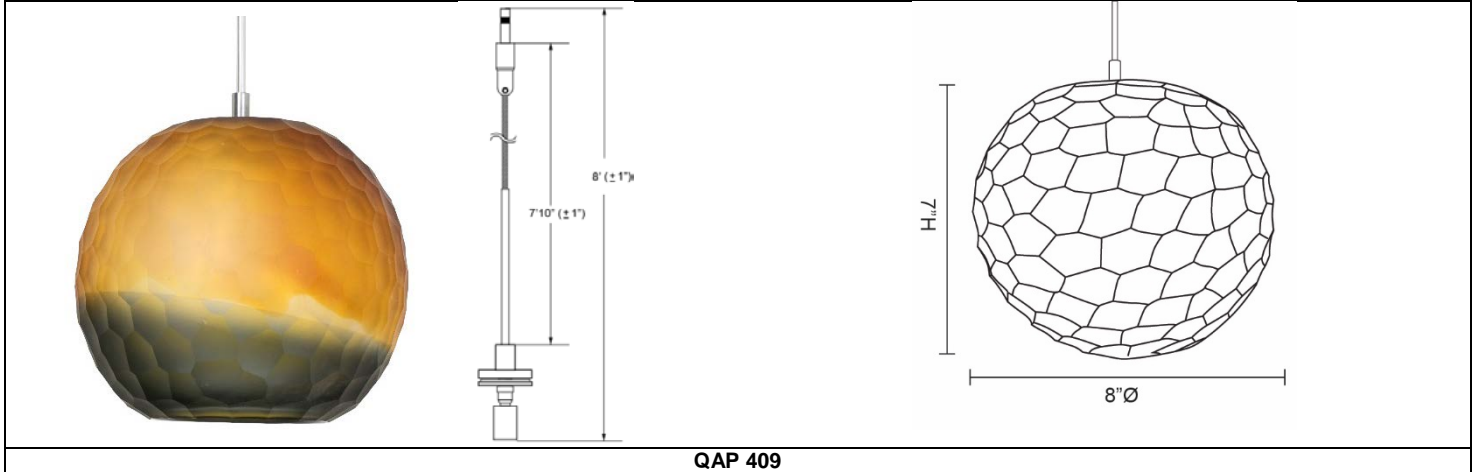

**QAP 409**

**DESCRIPTION**

Handcrafted, frosted faceted sphere glass. No two alike.

Quick Adapt Pendant includes a Quick Adapt Jack, 8' socket assembly, hang-straight tube, and Xenon Bi-Pin 12V 50W lamp. Cable may be field-cut.

May be used with JESCO Monorail Systems, Standard Track Systems, or with Monopoint/Multipoint Systems – See COMPATIBLE SYSTEMS.

**SPECIFICATIONS**

Input Voltage	12 VAC
Wattage	Up to 50W
Socket set	QASS32X (included and pre-installed)
Lamp*	Xenon Bi-Pin 12V 50W (included)
Dimensions	7"H x 8" Ø
Environment	Indoor - Dry
Certifications	ETL Listed

\*Optional: 24V lamp, requires appropriate power supply (not supplied).

**ORDERING INSTRUCTIONS**

<b>MODEL</b>	<b>-</b>	<b>GLASS FINISH</b>	<b>/</b>	<b>SOCKET FINISH</b>
QAP409			/	
		<b>AM</b> – Amber		<b>BZ</b> – Bronze
		<b>SM</b> – Smoke		<b>CH</b> – Chrome
		<b>BUGN</b> – Blue/Green gradient		<b>SN</b> – Satin Nickel
		<b>BZSM</b> – Bronze/Smoke gradient		

Example: **QAP409-AM/SN**

**COMPATIBLE SYSTEMS**

**MONOPOINT / MULTIPOINT SYSTEM**



Quick Adapt Pendants may be directly mounted onto Monopoint or Multipoint canopies which have built-in or remote transformer options.

**STANDARD TRACK SYSTEM**



The Standard Track Adapter MA-TA-H (sold separately) enables the use of Quick Adapt Pendants in Standard, Line Voltage H-Track Systems. Includes a 50W electronic transformer. Dimmable with an electronic or standard incandescent dimmer.

**MONORAIL SYSTEM**



The Monorail Fixture Adapter MA-FA (sold separately) provides the connection between the Quick Adapt Pendant to the Monorail.



www.jescolighting.com  
support@jescolighting.com  
**Tech Support:** 855.592.0029

15 Harbor Park Drive  
Port Washington, NY 11050  
**Main Line:** 800.527.7796  
**Fax Line:** 855.265.5768

219 South 6<sup>th</sup> Ave  
City of Industry, CA 91746  
**Main Line:** 855.654.0110  
**Fax Line:** 626.333.2955

*Specifications subject to change without notice.*



# QAP409

QUICK ADAPT PENDANTS  
LOW VOLTAGE

Type	
Project	
Catalog No.	

The truly versatile combination of Quick Adapt Pendants surface-mounted on a JESCO Monopoint/Multipoint System enables a designer to fully customize and create a unique lighting solution in any space. Using the Quick Adapt Jack, any pendant may be easily inserted into the Mono/Multipoint canopies to create an individual spotlight, or creative groupings of cascading pendants.

Multipoint mounting is perfect for creating light over kitchen counters or illuminating tables. Select from a variety of single-light through four-light canopies in square, rectangular and round shapes, with integral or remote 12V transformers.



### QAC-1R

**Transformer:** (1) 12V 50W Included  
**Dims:** 5 1/8" L x 3 1/2" W x 1 1/8" H  
**Finish:** SN  
 Supplied with square junction box cover plate



### QAC-2R

**Transformer:** (2) 12V 50W Included  
**Dims:** 14 1/4" L x 3 1/2" W x 1 1/8" H  
**Finish:** SN  
 Supplied with square junction box cover plate



### QAC-3R

**Transformer:** (3) 12V 50W Included  
**Dims:** 24 1/8" L x 3 1/2" W x 1 1/8" H  
**Finish:** SN  
 Supplied with square junction box cover plate



### QAC-4R

**Transformer:** (4) 12V 50W Included  
**Dims:** 35 1/2" L x 3 1/2" W x 1 1/8" H  
**Finish:** SN  
 Supplied with square junction box cover plate



### QAC-4S

**Transformer:** (4) 12V 50W Included  
**Dims:** 10 3/8" L x 10 3/8" W x 1 1/8" H  
**Finish:** SN



### QAC-1C

**Transformer:** (1) 12V 50W Included  
**Dims:** 4 1/2" Ø x 2" H  
**Finish:** BZ, CH, SN



### QAC-1C-RT

**Transformer:** (1) 12V 50W remote transformer required (sold separately)  
**Dims:** 4 1/2" Ø x 3/8" H  
**Finish:** BZ, CH, SN  
 Supplied with 18" lead wire and 2 wire AMP connector. Built in Housing adjusts to ceiling thickness.



### QAC-1C-RTH

**Transformer:** (1) 12V 50W remote transformer required (sold separately)  
**Dims:** 2 1/8" Ø x 2" H  
**Finish:** CH, SN  
 Supplied with 18" lead wire and 2 wire AMP connector. Built in Housing adjusts to ceiling thickness.



### QAC-3C

**Transformer:** (3) 12V 50W Included  
**Dims:** 8" Ø x 2 1/4" H  
**Finish:** CH, SN