

1 MOUNTING OPTIONS

MOUNTING CLIPS

- MC Plastic Mounting U Clip
- BR Metal Mounting Bracket



CHANNELS

- CH3 3/8 Inch Metal Mounting Channel

2 CONTROL OPTIONS

RF RECEIVER & REMOTE CONTROLLERS

- A LC-RF-400-TUYA-RCV (required)
- B LC-RF-410W-RGB (wall mounted remote controller)
- B LC-RF-400H-RGB (handheld remote controller)

DMX CONTROLLER & INTERFACE


- C LC-RF-510W-RGBWW
- C LC-PC-100
- C LC-PC-400
- C LC-PC-500
- D LC-300-INT (interface required)

3 LOCATION OF RUNS

TYPE QTY


4 INPUT OPTIONS

DL-FLEX2-LNDB-RGBW-TS-PC



DL-FLEX2-LNDB-RGBW-US-PC

Must choose a side for assembling the input connector

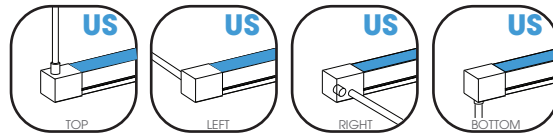

INPUT TYPE INPUT SIDE Leave blank for (TS)

5 LENGTH

SELECT INCH
Increments of 3-1/4"
OR

ENTER BY FEET
Enter desired length, product will be made to the closest 3-1/4" increment

MAX RUN LENGTH: 16FT

Each run is sealed with an endcap prior shipping. Product can be field shortened, additional endcaps and sealants can be ordered as option to seal the end of run post field shortening

IN FT

IN FT

IN FT

IN FT

IN FT

IN FT

IN FT

IN FT

IN FT

IN FT

IN FT

IN FT

OPTIONAL ACCESSORIES

ENDCAP DL-FLEX2-LNDB-RGBW-EC QTY

WATERPROOF SEALANT SEALANT QTY

12" HARDWIRE LEAD W/ FEMALE CONNECTOR DL-FLEX2-LNDB-RGBW-PC-HW-F QTY

24" EXTENSION CABLE W/ MALE & FEMALE CONNECTOR DL-FLEX2-LNDB-RGBW-PC-HW-F QTY



24V DC



FIELD CUTTABLE



WET OUTDOOR



IP65



UL US LISTED