



DL-PS-60/24-CL2

LED POWER SUPPLIES
24V DC Plug and Play Series

Type	
Project	
Catalog No.	



DESCRIPTION



- Short circuit, over current, over voltage, over temperature protection.
- High efficiency up to 91%
- IP67 design (for main body)
- UL8750 Listed
- Class 2 power unit
- Class II power unit
- Fully isolated plastic case

SPECIFICATIONS

Input Voltage	90 ~ 264V AC
Input Frequency	50/60Hz +/- 3Hz
Output Voltage	24V DC
Output Power	60W
Rated Load Current	2.5A
MTBF	292.8Khrs
Dimensions	5-1/8"L x 2-1/8"W x 1-3/8"H
Operating Temperature †	-35°C ~ +70°C
Operating Humidity	20% ~ 95% RH
Environment	Dry or Damp
Certifications	c-UL-us
Warranty	5 Years – see published warranty terms for detailed information.

† Refer to derating curve if approaching max operating temperature.

DERATING CURVES

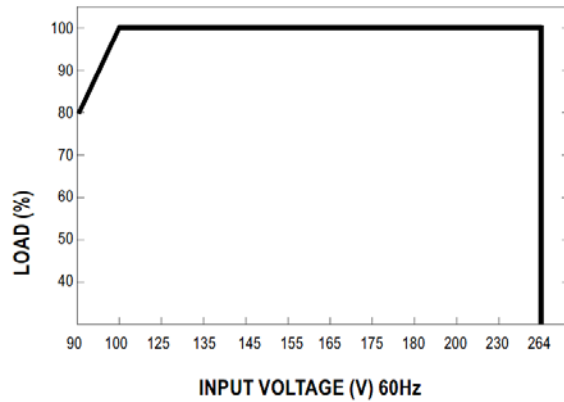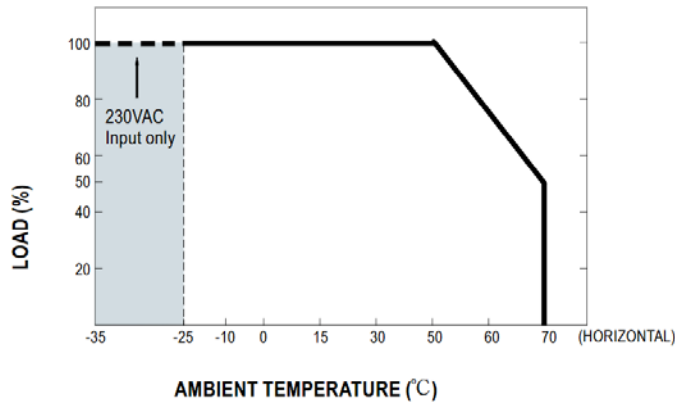



DL-PS-60/24-CL2

LED POWER SUPPLIES
24V DC Plug and Play Series

Type	
Project	
Catalog No.	

DIMENSIONS

