


DL-PS-SW-PIR-BK

IN-LINE PASSIVE INFRARED SENSOR SWITCH WITH DUSK TO DAWN MOTION SENSOR



Fixture Type
Project
Notes

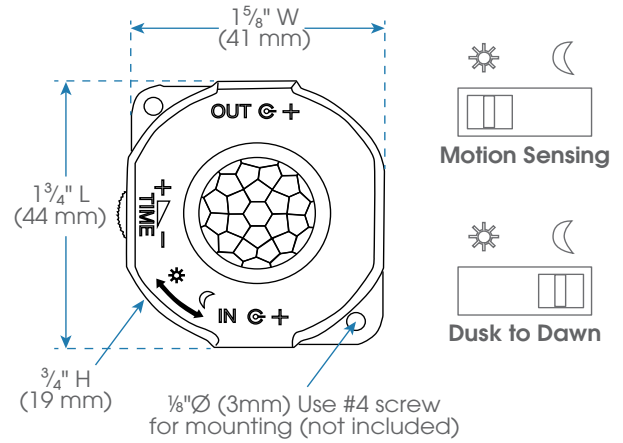

In-line plug-and-play motion sensor switch. Perfect for closets and low occupancy areas to save energy. Adjust time delay with an easy-to-access rotary dial. Dusk to dawn function with a flip of a switch. Compatible with 12V and 24V DC fixtures. Suitable for surface mount installations, includes input and output cable.

24V DC
 DUSK TO DAWN
 MOTION
 INDOOR
 5 YEAR WARRANTY

SPECIFICATIONS

INPUT VOLTAGE	12V /24V DC
WATTAGE	4A - 12V 48W 24V 96W
INPUT / OUTPUT	OD 5.5mm ID 2.1mm cables included
DIMENSIONS	1 3/4" L x 1 5/8" W x 3/4" H (44 x 41 x 19 mm)
BOX INCLUDES	(1) 40 3/8" (1025 mm) Input Cable and (1) 40 1/2" (1028 mm) Output Cable
SENSOR	PASSIVE INFARRED & LIGHT SENSOR
BEAM RANGE	140°
DELAY TIME RANGE	Adjustable from 15 to 300 seconds
ENVIRONMENT	Indoor - Dry
WARRANTY	5 Years


ORDERING INFO

ITEM NUMBER

DL-PS-SW-PIR-BK

In-line passive infrared sensor switch

WIRING SCHEMATIC

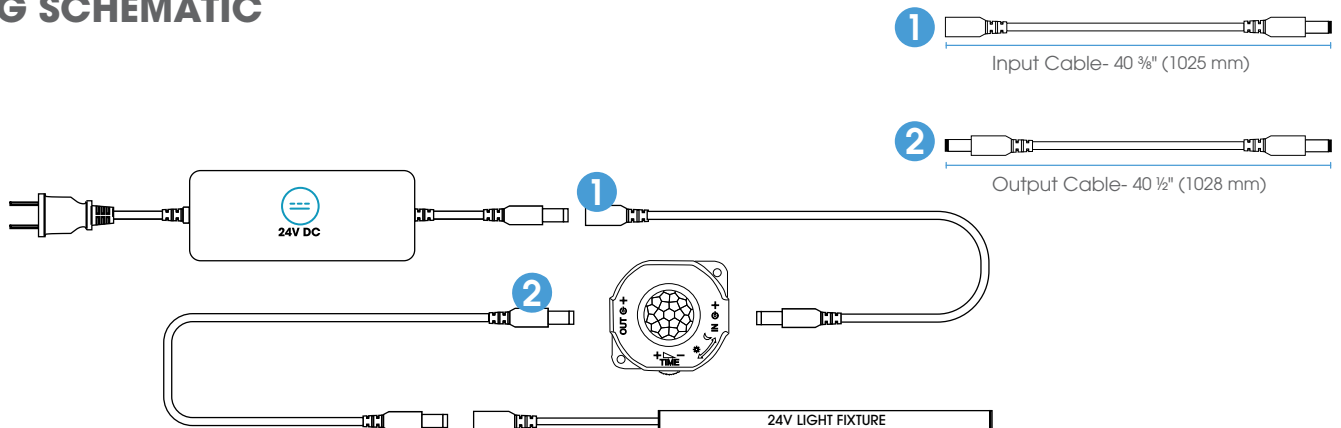

DL-PS-SW-PIR-BK

IN-LINE PASSIVE INFRARED SENSOR SWITCH
WITH DUSK TO DAWN MOTION SENSOR



Fixture Type
Project
Notes

PLUG & PLAY POWER SUPPLIES



MODEL	DL-PS-WP24/24	DL-PS-48/24	DL-PS-100/24
RATED POWER	24W	48W	100W
RATED CURRENT	1.0A	2.0A	3.8A
INPUT	120V AC	120V AC	120V AC
DC OUTPUT	24V DC	24V DC	24V DC
POWER FACTOR	0.80	0.84	0.90
WIDTH W	1 3/4"	2"	2 3/8"
LENGTH L	3 1/4"	4 3/8"	5 3/4"
HEIGHT H	1 1/4"	1 1/8"	1 1/4"

ORDERING INFO

SERIES WATTAGE / VOLTAGE / TYPE

DL-PS-

- WP24/24** - 24 Watt 24 Volt wall-plug
- 24/24** - 24 Watt 24 Volt wall-plug
- 48/24** - 48 Watt 24 Volt wall-plug
- 60/24** - 60 Watt 24 Volt wall-plug



MODEL	DL-PS-60/24-CL2	DL-PS-90/24-CL2
RATED POWER	60 W	90 W
RATED CURRENT	2.5A	3.8A
INPUT	120V AC	120V AC
DC OUTPUT	24V DC	24V DC
POWER FACTOR	0.80	0.80
WIDTH W	2 1/16"	2 1/16"
LENGTH L	5 1/8"	5 1/8"
HEIGHT H	1 3/8"	1 3/8"

ORDERING INFO

SERIES WATTAGE / VOLTAGE

TYPE

DL-PS-

-CL2

- 60/24** - 60 Watt 24 Volt wall-plug
- 90/24** - 90 Watt 24 Volt wall-plug
- 100/24** - 96 Watt 24 Volt wall-plug



¹ 0-10 dimming required additional interface - LC-DIM5A / ² Requires LC-RF-400 receiver and controller