


DL-PS-SW-PIR-DOOR

IN-LINE SHORT-DISTANCE PASSIVE INFRARED SENSOR WITH AN ON/OFF SWITCH FOR DOORS



Fixture Type
Project
Notes

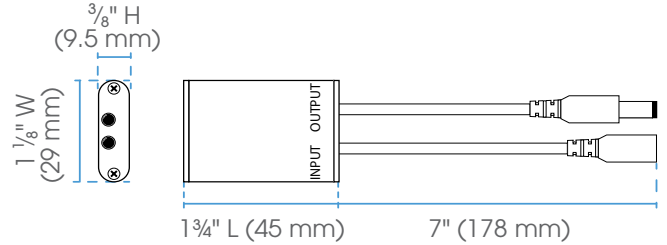

In-line plug and play short-distance passive infrared sensor with an on/off switch for doors. Compatible with 12V and 24V DC fixtures. Suitable for recessed installation for 3/4" through hole.



SPECIFICATIONS

INPUT VOLTAGE	12V /24V DC
WATTAGE	4A - 12V 48W 24V 96W
INPUT / OUTPUT	OD 5.5mm ID 2.1mm
DIMENSIONS	1 3/4" L x 1 1/8" W x 3/8" H with 7" cables (45 x 29 x 9.5 with 178 cables mm)
ON/OFF FUNCTION	Touch ON/OFF
DIMMING	Touch and hold switch (>550ms) to adjust Light intensity
ENVIRONMENT	Indoor - Dry
WARRANTY	5 Years


ORDERING INFO

ITEM NUMBER

DL-PS-SW-PIR-DOOR

In-line short-distance passive infrared sensor

WIRING SCHEMATIC

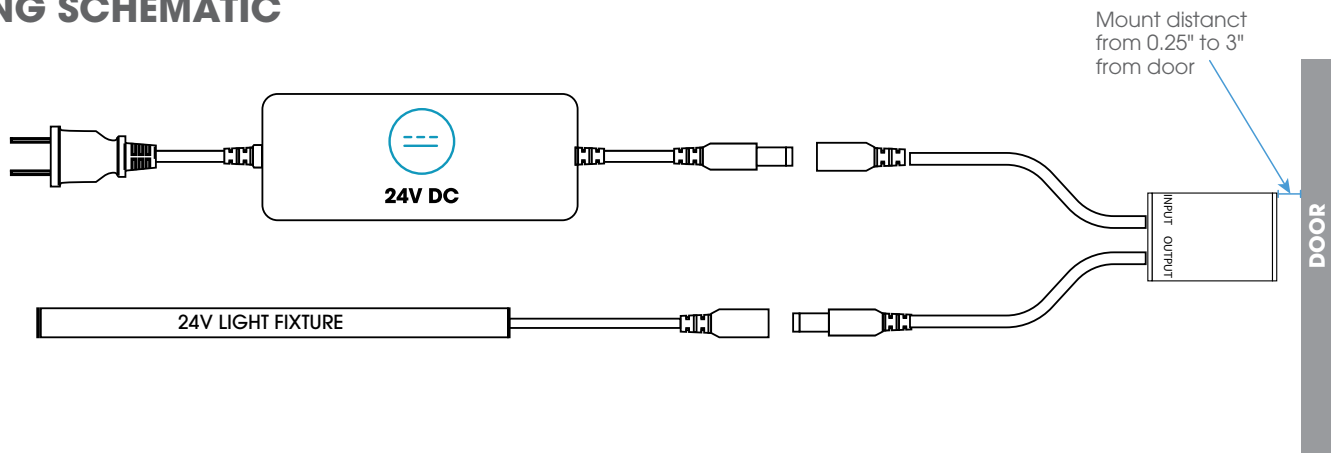

DL-PS-SW-PIR-DOOR

IN-LINE SHORT-DISTANCE PASSIVE INFRARED SENSOR WITH AN ON/OFF SWITCH FOR DOORS



Fixture Type
Project
Notes

PLUG & PLAY POWER SUPPLIES



MODEL	DL-PS-WP24/24	DL-PS-48/24	DL-PS-100/24
RATED POWER	24W	48W	100W
RATED CURRENT	1.0A	2.0A	3.8A
INPUT	120V AC	120V AC	120V AC
DC OUTPUT	24V DC	24V DC	24V DC
POWER FACTOR	0.80	0.84	0.90
WIDTH W	1 3/4"	2"	2 3/8"
LENGTH L	3 1/4"	4 3/8"	5 3/4"
HEIGHT H	1 1/4"	1 1/8"	1 1/4"

ORDERING INFO

SERIES WATTAGE / VOLTAGE / TYPE

DL-PS-

- WP24/24** - 24 Watt 24 Volt wall-plug
- 24/24** - 24 Watt 24 Volt wall-plug
- 48/24** - 48 Watt 24 Volt wall-plug
- 60/24** - 60 Watt 24 Volt wall-plug



MODEL	DL-PS-60/24-CL2	DL-PS-90/24-CL2
RATED POWER	60 W	90 W
RATED CURRENT	2.5A	3.8A
INPUT	120V AC	120V AC
DC OUTPUT	24V DC	24V DC
POWER FACTOR	0.80	0.80
WIDTH W	2 1/16"	2 1/16"
LENGTH L	5 1/8"	5 1/8"
HEIGHT H	1 3/8"	1 3/8"

ORDERING INFO

SERIES WATTAGE / VOLTAGE

TYPE

DL-PS-

-CL2

- 60/24** - 60 Watt 24 Volt wall-plug
- 90/24** - 90 Watt 24 Volt wall-plug
- 100/24** - 96 Watt 24 Volt wall-plug



¹ 0-10 dimming required additional interface - LC-DIM5A / ² Requires LC-RF-400 receiver and controller