




LV4000B
4" NEW CONSTRUCTION • NON-IC UNIVERSAL
LOW VOLTAGE
RECESSED DOWNLIGHTS

Type	
Project	
Catalog No.	

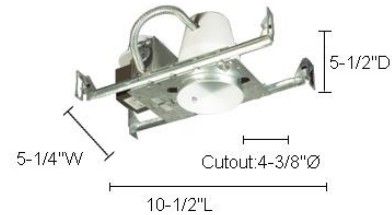

ORDERING INSTRUCTIONS

MODEL: LV4000B

DESCRIPTION

- 4" Low Voltage New Construction Non-IC Universal Housing
- Thermally protected, listed for damp locations
- UL listed for feed-through branch circuit wiring.
- Integral 120V/12V AC 60Hz, pre-wired snap-out magnetic transformers.
- Dimmable with magnetic low-voltage dimmers.
- J-box and transformer accessible through ceiling cut-out.
- Non-IC units require 3-inch of clearance on all sides.
- Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
- Hanger Bars: Adjustable 14-1/2" to 24-1/2"
- Cut-Out: 4-3/8"Ø

LAMP:

MR16 12V 50W Max. Sold separately.

WIRING:

Housing is supplied with thermal protector.

OTHER OPTIONS



LV4000BA

Non-IC Airtight Universal Housing for New Construction
 MR16 120V 50W
Dimensions: 5-1/4"W x 10-1/2"L x 5-1/2"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000IC

IC Housing for New Construction
 MR16 120V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000ICA

IC Airtight Housing for New Construction
 MR16 120V 50W
Dimensions: 7-3/4"W x 12-1/4"L x 7"D
Hanger Bars: adj. 14-1/2" ~ 24-1/2"
Cutout: 4-3/8"Ø



LV4000R

Non-IC Housing for Remodel
 MR16 120V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø



LV4000RA

Non-IC Airtight Housing for Remodel
 MR16 120V 50W
Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
Cutout: 4-3/8"Ø