




# LV4000R

4" REMODELING • NON-IC • LOW VOLTAGE  
RECESSED DOWNLIGHTS

Type	
Project	
Catalog No.	

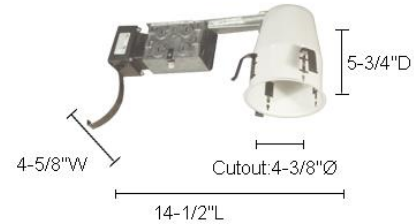

### ORDERING INSTRUCTIONS

MODEL: LV4000R

### DESCRIPTION

- 4" Low Voltage Remodeling Non-IC Housing
- Thermally protected, listed for damp locations
- UL listed for feed-through branch circuit wiring.
- Integral 120V/12V AC 60Hz, pre-wired snap-out magnetic transformers.
- Dimmable with magnetic low-voltage dimmers.
- Remodeling housing models allow wiring below ceiling plane.
- J-box and transformer accessible through ceiling cut-out.
- 4-inch remodeling housings fit into tight 6-inch joist ceiling spaces.
- Non-IC units require 3-inch of clearance on all sides.
- Dimensions: 4-5/8"W x 14-1/2"L x 5-3/4"D
- Cut-Out: 4-3/8"Ø

#### LAMP:

MR16 12V 50W Max. Sold separately.

#### WIRING:

Housing is supplied with thermal protector.

### OTHER OPTIONS



#### LV4000B

Non-IC Universal Housing for New Construction

MR16 120V 50W

**Dimensions:** 5-1/4"W x 10-1/2"L x 5-1/2"D

**Hanger Bars:** adj. 14-1/2"~ 24-1/2"

**Cutout:** 4-3/8"Ø



#### LV4000BA

Non-IC Airtight Universal Housing for New Construction

MR16 120V 50W

**Dimensions:** 5-1/4"W x 10-1/2"L x 5-1/2"D

**Hanger Bars:** adj. 14-1/2"~ 24-1/2"

**Cutout:** 4-3/8"Ø



#### LV4000IC

IC Housing for New Construction

MR16 120V 50W

**Dimensions:** 7-3/4"W x 12-1/4"L x 7"D

**Hanger Bars:** adj. 14-1/2"~ 24-1/2"

**Cutout:** 4-3/8"Ø



#### LV4000ICA

IC Airtight Housing for New Construction

MR16 120V 50W

**Dimensions:** 7-3/4"W x 12-1/4"L x 7"D

**Hanger Bars:** adj. 14-1/2"~ 24-1/2"

**Cutout:** 4-3/8"Ø



#### LV4000RA

Non-IC Airtight Housing for Remodel

MR16 120V 50W

**Dimensions:** 4-5/8"W x 14-1/2"L x 5-3/4"D

**Cutout:** 4-3/8"Ø