



MMGRGU1050

MINI MODULINEAR
LINE VOLTAGE REMODEL RECESSED FIXTURES

Type	
Project	
Catalog No.	



DESCRIPTION

This Remodel recessed fixture is comprised of separate housing and trim. The GU10 sockets mean that no transformer is required. This makes dimming infinitely easier for both halogen and LED applications. The trim design allows for use in ceilings up to 2" thick.

FEATURES

- 3/4" overlap flanges, along with "pull-tight" torsions springs allow for minor cutting errors in the ceiling
- Self-resetting thermal protector ensures that fixture is deactivated in case of overheating.
- Double-gimbal construction ensures that lamps can be aimed at virtually any point below the ceiling.
- Leveling screw ensures that fixture is properly lined up with the ceiling
- Aiming – Inner Gimbal: 30°, Outer Gimbal: 30°
- Fits up to 2" ceiling depth

SPECIFICATIONS

HOUSING:

The housing is constructed out of a heavy gauge cold rolled steel and powder coated to ensure corrosion resistance,

JUNCTION BOX:

- Junction box is listed for thru branch circuit wiring (Max of 8 #12 AWG 90°C branch circuit conductors)
- A variety of different sized knockouts provide for different wiring options.

MOUNTING:

Designed to be installed with overlap flange trim. Innovative mounting system incorporates leveling screw to ensure fixture is properly lined up with the ceiling. Consult factory for possible use in trimless "mud-in" installations. Non-IC means 3" clearance from any insulation on all sides must be maintained.

LAMPING:

Use GU10 base Halogen or LED MR16 Lamp – 50W Max (Lamps not included).

CERTIFICATIONS:


UL & CUL Listed.

ORDERING INFORMATION

MODEL	LAMP BASE / WATTAGE	# OF LAMPS	FINISH
MMGR	GU1050	-	
	GU1050 – GU10 Base MR16 lamp / 50W max.	1 – 1 Light 2 – 2 Light 3 – 3 Light 4 – 4 Light	AW – White Trim, White Gimbal, White Interior WB – White Trim, Black Gimbal, Black Interior

Example: MMGRGU1050-2WB

FIXTURE CONFIGURATIONS

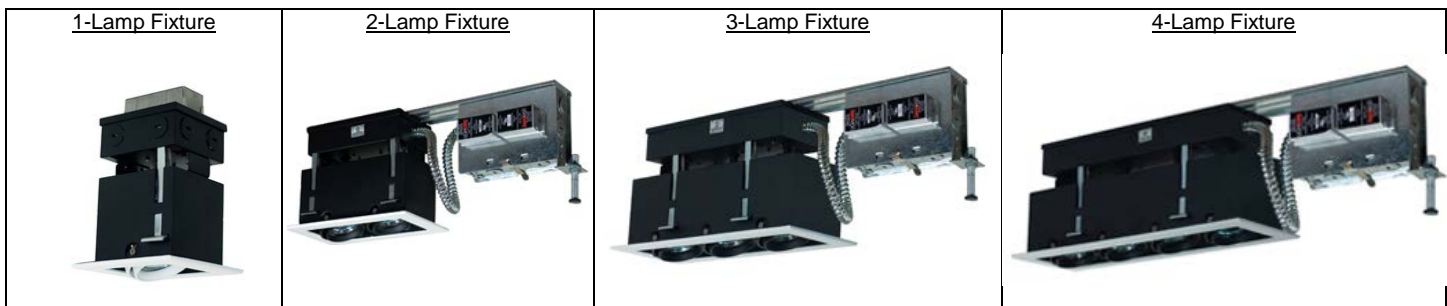

www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

3/10/2016

Specifications subject to change without notice.




MMGRGU1050

MINI MODULINEAR
LINE VOLTAGE REMODEL RECESSED FIXTURES

Type	
Project	
Catalog No.	

FIXTURE DIMENSIONS

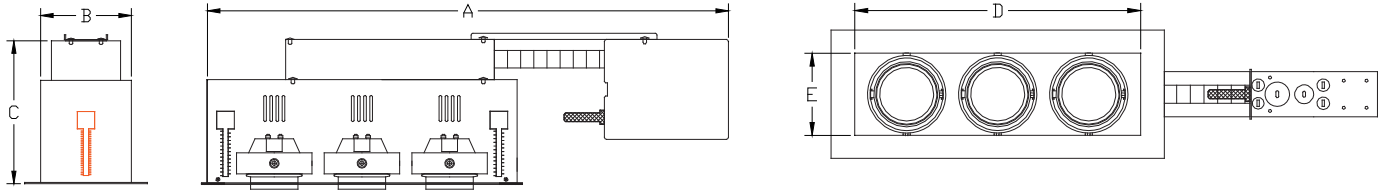

MODEL	HOUSING			APERTURE		CUT-OUT	
	A	B	C	D	E		
MMGRGU1050-1	4 1/2"	3 1/2"	6 1/4"	3-1/8"	3-1/8"	4"	3-3/4"
MMGRGU1050-2	16 1/4"	3 1/2"	6 1/8"	6 3/8"	3-1/8"	7-3/8"	3-3/4"
MMGRGU1050-3	19 3/4"	3 1/2"	6 1/8"	10"	3-1/8"	11-1/8"	3-5/8"
MMGRGU1050-4	23 1/4"	3 1/2"	6 1/8"	13 3/4"	3-1/8"	14-3/4"	3-5/8"

ACCESSORIES



DICHROIC LENS
LENS-16-DI-RD (Red)
LENS-16-DI-BU (Blue)
LENS-16-DI-YW (Yellow)
LENS-16-DI-GN (Green)



COLORED LENS
LENS-16-RD (Red)
LENS-16-BU (Blue)
LENS-16-YW (Yellow)
LENS-16-GN (Green)



PRISMATIC DIFFUSER
LENS-16-PRIS



SOFTENING DIFFUSER
LENS-16-SOFT




UV FILTER
LENS-16-UV



FROSTED DIFFUSER
LENS-16-FROS



LINEAR DIFFUSER
LENS-16-LINR



HONEYCOMB LOUVER
LENS-16-HCOM



LL-MR16GU10-8W-40-2780
LL-MR16GU10-8W-40-3080
LL-MR16GU10-8W-40-4080
Watt: 8W (65W equivalent)
Lumen: 580 Lm