

WHILE SUPPLIES LAST

RELYENCE DISTRIBUTOR PROGRAM



RE-GEO-FM-991XX

LED FIXTURES


4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING

Type	
Project	
Catalog No.	






DIMENSIONS: 5-7/8" Ø x 1" H / 7-3/8" Ø x 1-1/2" H

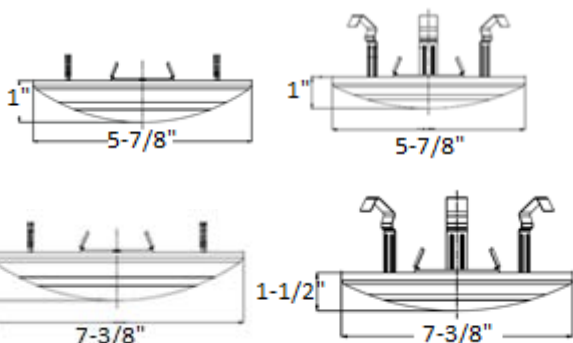Outlet box mounting Retrofit Mounting



SPECIFICATIONS

Model	RE-GEO-FM-991XX	
Description	Disk Light – 4" and 6"	
Input Voltage	120 VAC	
Size	4"	6"
Wattage	8W	10W
Lumens	650 lm	750 lm
Efficacy	81 lm/W	75 lm/W
CCT/CRI	2700K@90CRI	
	3000K@80CRI	
	3500K@80CRI	
Power Factor	>0.95	
Operating Temperature	-4 to +113 °F	
Dimming	Triac Dimming and CFL/LED	
Dimensions	See Diagram	
Environment	Indoor – Dry / Damp	
	  	
Warranty	JESCO WSL Discontinued/Overstock items are final sale, non-returnable, and include a 90-day warranty against defects from the invoice date, superseding all prior stated warranties in print, online, or any other form.	

▼Exceeding the operating temperature values may damage the LEDs by reducing the lifespan, lumen output, and/or adversely impact color consistency. Improper thermal management may lead to premature product failure and void the warranty.

DESCRIPTION

JESCO's RELYENCE Series LED Disk light is available in a domed die-cast configuration providing an easy and cost effective solution to the traditional flush mounted ceiling light. Easily mounts on to standard junction boxes or retrofits into 4" and 6" recessed housings with supplied mounting kit. These fixtures are designed for damp or dry locations and are dimmable down to 10% with Triac or CFL/LED dimmers.

FEATURES

- Up to 750 lm from 10 W
- CCT - 2700K, 3000K or 3500K◆
- CRI >80 & 90◆
- Power Factor >0.95
- Dimmable down to 10% with most Triac or CFL/LED dimmers
- ADA compliant
- Beam Angle - 115°
- Damp Location Listed
- Eco-Friendly – No mercury or hazardous materials
- J-Box or retrofit mounting

◆Refer to ordering info



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Specifications subject to change without notice.

WHILE SUPPLIES LAST

RELYENCE DISTRIBUTOR PROGRAM



RE-GEO-FM-991XX

LED FIXTURES
4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING


Type	
Project	
Catalog No.	

ORDERING INFORMATION

MODEL	STYLE	CCT/CRI	FINISH
RE-GEO-FM-991	04- 5-7/8" 06- 7-3/8"	2790-2700CCT/90CRI 3080-3000CCT/80CRI 3580-3500CCT/80CRI	WH-White

Example: **RE-GEO-FM-99104-2790-WH**


SUPPLIED WITH:

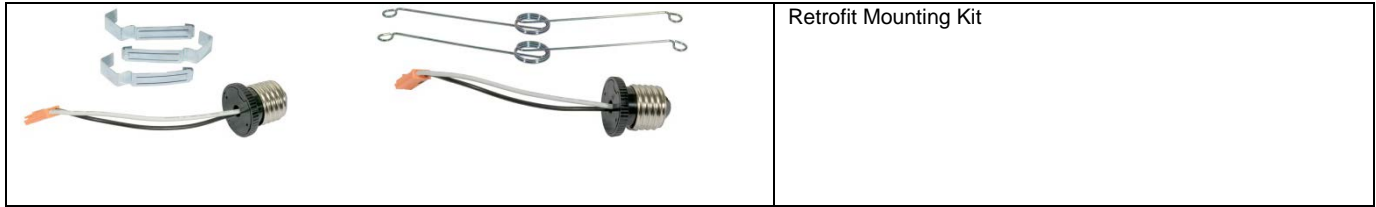


Retrofit Mounting Kit

PHOTOMETRIC DATA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

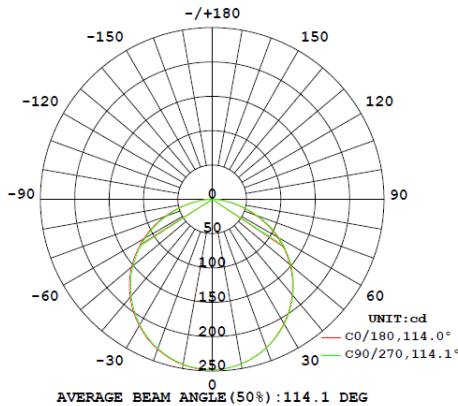

Lamp Flux : 530.0 lm

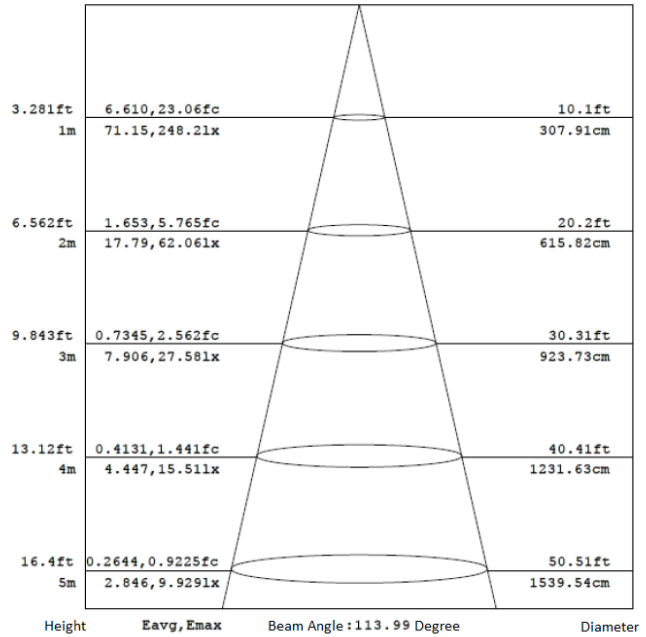

For 99104"



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

Specifications subject to change without notice.

WHILE SUPPLIES LAST

RELYENCE DISTRIBUTOR PROGRAM




RE-GEO-FM-991XX

LED FIXTURES


4" AND 6" DISK LIGHT – J-BOX OR RETROFIT MOUNTING

Type	
Project	
Catalog No.	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

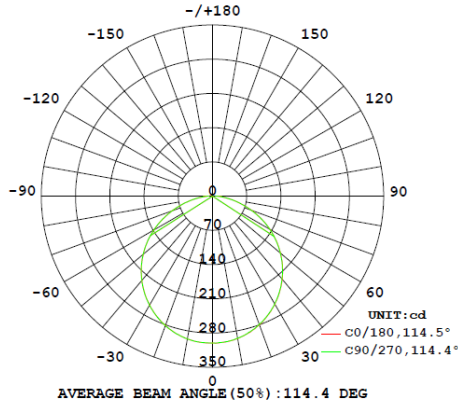

Lamp Flux : 652.6 lm

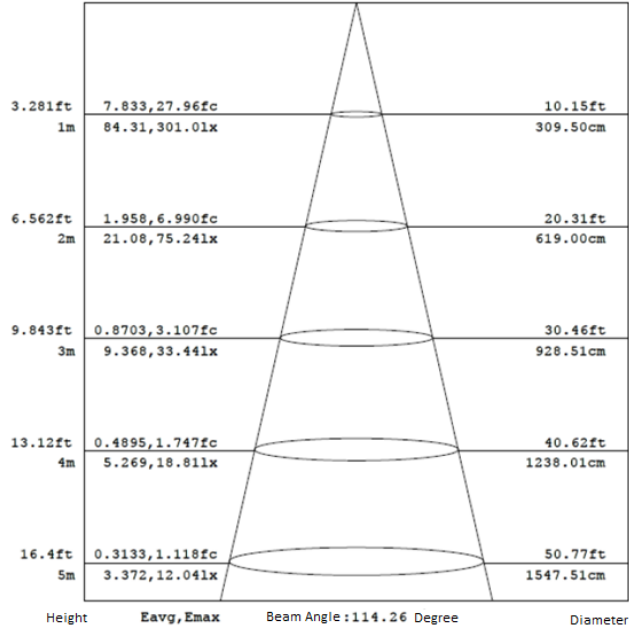

For 99106"

