

RLF-4115-UNI

4" LED DOWNLIGHT
RECESSED DOWNLIGHT



Fixture Type
Project
Notes



RLF-4115 with RLT-4101-WH



RLF-4115 with RLT-4106-WH



RLF-4115-UNI-SW5 complete set

LED Downlights series is designed for residential and commercial spaces. With a selection of Round and Square Trim in Black or White options, an ultra shallow profile of merely 1-7/8" deep coupled with IC rating, this Slim Downlight is perfect for tight spaces such as soffits, insulated and suspended ceilings as well as installations directly below ceiling joists. Fixture installs flush to ceiling. No housing is required for remodel applications, and they include mounting frame with hanger bars optional for New Construction applications. Trim is sold separately and remote driver is included.

120 - 277V AC	0-10V DIMMABLE	40° BEAM	INDOOR	RECESSED TRIM	CANLESS	IC RATED	AIRTIGHT	3 3/4" CUT-OUT	-4° to 104° F	L70 50,000 HOURS	5 YEAR WARRANTY	Intertek
---------------	----------------	----------	--------	---------------	---------	----------	----------	----------------	---------------	------------------	-----------------	----------

SPECIFICATIONS

INPUT VOLTAGE	120-277V AC
WATTAGE	15 W
LUMENS	1000 Lm
EFFICACY	67 Lm/W
CRI	90+
BEAM ANGLE	40°
DIMMING¹	0-10V Dimmable
CUT-OUT	3 3/4" Ø

RATINGS	IC, Airtight
ENVIRONMENT	Indoor - Wet
CERTIFICATIONS	cETLus, T24 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Remote driver
REQUIRE	Round or square trims
OPTIONAL	RLH-23354-NC-UNI Universal mounting plate
WARRANTY²	5 years

¹ Effectively dim down to 10%
² See published warranty terms for detailed information

PERFORMANCE

CCT selectable via switch on heatsink



ORDERING INFO

STEP 1 - Light Engine with LED

	MODEL RLF-4115-UNI	-	CCT / CRI SW5
			SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI

OPTIONAL ACCESSORY

(Sold separately)

	MODEL RLH-23354-NC-UNI
	Universal mounting plate with hanger bars. For cutout sizes 2 1/8", 2 7/8", 3 3/4" or 5 1/4"

STEP 2 - Trim (Sold separately)

		MODEL	FINISH
RLT-4101-BK	RLT-4101-WH	RLT-4101 - Round Trim	BK - Black
RLT-4106-BK	RLT-4106-WH	RLT-4106 - Square Trim	WH - White

NY 15 Harbor Park Drive
Port Washington, NY 11050

Main 800 527 7796
Fax 855 265 5768

CA 219 South 6th Ave
City of Industry, CA 91746

Main 800 527 7796
Fax 855 265 5768

support@jescolighting.com
Tech Support 855 592 0029



RLF-4115-UNI

4" LED DOWNLIGHT
RECESSED DOWNLIGHT




Fixture Type
Project
Notes

TECHNICAL DRAWING

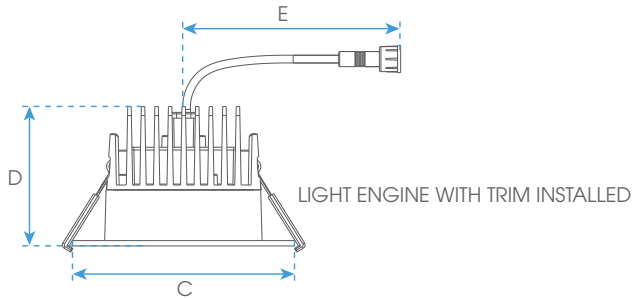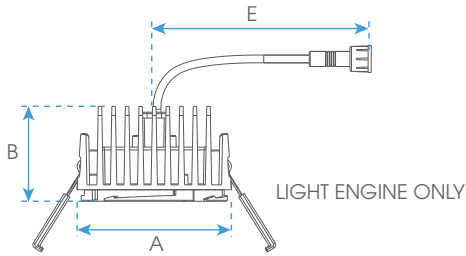

DIMENSIONS		
A	3-1/8"	80 mm
B	1-7/8"	49 mm
C	4-1/2"	115 mm
D	3"	75 mm
E	7-1/2"	190 mm

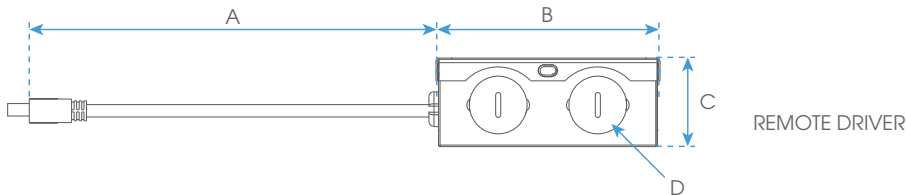


DIMENSIONS		
A	7-1/2"	190 mm
B	3-7/8"	80 mm
C	1-1/2"	39 mm
D	1/2" Knockout	

TRIMMED OPTIONS



PART NUMBER	RLT-4101
DESCRIPTION	Round Trim in BK - Black and WH - White
ENVIROMENT	Indoor, Wet
DIMENSIONS	A: 3" (76 mm) x B: 4-1/2" (115 mm) x C: 1-1/8" (29 mm)

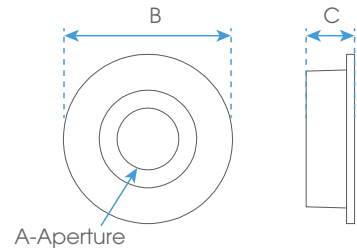

PART NUMBER	RLT-4106
DESCRIPTION	Square Trim in BK - Black and WH - White
ENVIROMENT	Indoor, Wet
DIMENSIONS	A: 3" (76 mm) x B: 4-1/2" (115 mm) x C: 1-1/8" (29 mm)

