

# RLF-4515-RTL-UNI


4" LED ROUND TRIMLESS  
RECESSED DOWNLIGHT WITH MUD-IN FLANGE



Fixture Type
Project
Notes



RLF-4515-RTL-UNI

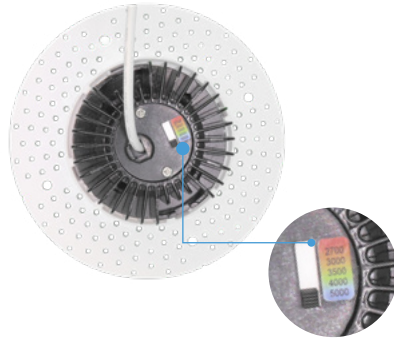

RLF-4515-RTL-UNI-SW5-WH complete set

LED Trimless Downlight series is designed for residential and commercial applications. With contemporary trimless look and an ultra shallow profile of merely 2-1/2" deep coupled with IC rating, this Slim Downlight is perfect for tight spaces such as soffits, insulated and suspended ceilings as well as installations directly below ceiling joists. The fixture installs flush to ceiling, it includes the Remote Driver and housing is not required for remodel applications. The mounting frame with hanger bars is optional for New Construction applications. The 5-level field selectable color temperature is available.

120 - 277V AC	0-10V DIMMABLE	RECESSED TRIMLESS	IC RATED	AIR TIGHT	CUT-OUT	3 3/4" ROUND CUT-OUT	WET INDOOR	L70 50,000 HOURS	5 YEAR WARRANTY	Intertek	T24 California TITLE 24 COMPLIANT
---------------	----------------	-------------------	----------	-----------	---------	----------------------	------------	------------------	-----------------	----------	-----------------------------------

## SPECIFICATIONS

<b>INPUT VOLTAGE</b>	120-277V AC
<b>WATTAGE</b>	15 W
<b>LUMENS</b>	1000 Lm
<b>EFFICACY</b>	67 Lm/W
<b>CRI</b>	90+
<b>BEAM ANGLE</b>	38°
<b>DIMMING<sup>1</sup></b>	0-10V Dimmable
<b>CUT-OUT</b>	3 3/4" Ø

<b>RATINGS</b>	IC, Airtight
<b>ENVIRONMENT</b>	Indoor - Wet
<b>CERTIFICATIONS</b>	cETLus, T24 Compliant
<b>LUMEN MAINTENANCE</b>	50,000 hours
<b>INCLUDES</b>	Remote driver and mud-in flange
<b>OPTIONAL</b>	RLH-23354-NC-UNI Universal mounting plate
<b>WARRANTY<sup>2</sup></b>	5 years


<sup>1</sup> Effectively dim down to 10% / See other compatible dimmers on the next page  
<sup>2</sup> See published warranty terms for detailed information

## PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE <sup>3</sup>	LUMEN <sup>4</sup>	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) <sup>5</sup>	1000 Lm	15 W	67 Lm/W	90+

<sup>3</sup> CCT within +/-10%  
<sup>5</sup> Switchable CCT

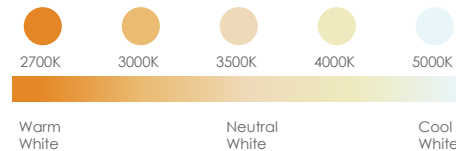

## ORDERING INFO

Light Engine with LED with remote driver, and Mud-in Flange



<b>MODEL</b> RLF-4515-RTL-UNI	-	<b>CCT / CRI</b> SW5 SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI	-	<b>FINISH</b> WH WH - White
----------------------------------	---	--	---	-----------------------------------

## OPTIONAL ACCESSORY

(Sold separately)



<b>MODEL</b> RLH-23354-NC-UNI
Universal mounting plate with hanger bars. For cutout sizes: 2 1/8", 2 7/8", 3 3/4" or 5 1/4"


# RLF-4515-RTL-UNI

4" LED ROUND TRIMLESS  
RECESSED DOWNLIGHT WITH MUD-IN FLANGE



Fixture Type
Project
Notes

## TECHNICAL DRAWING

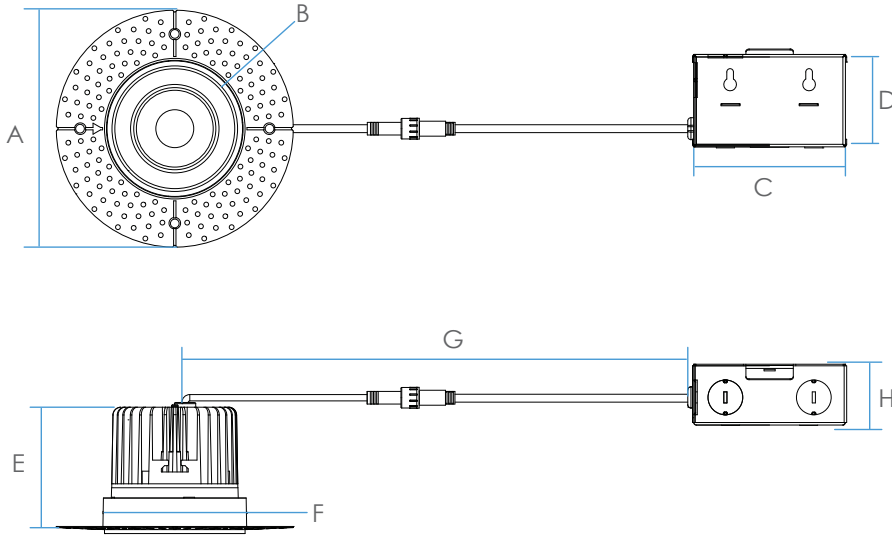

### DIMENSIONS

A	6"	152 mm
B	3 1/8"	80 mm
C	4"	102 mm
D	2 1/2"	64 mm
E	3 1/8"	80 mm
F	3 5/8"	91 mm
G	12 5/8"	320 mm
H	1 1/2"	38 mm