

# RLF-6315-SW5

6" SQUARE INDIRECT EDGELIT  
LED RECESSED DOWNLIGHTS



Fixture Type
Project
Notes



RLF-6315-SW5



RLF-6315-SW5-WH complete set

LED Edgelit Indirect Recessed Downlight series is designed for residential and commercial applications. Its hidden light source bounces off the interior dome to emit a diffused soft functional light. One-piece die cast aluminum trim and heat sink construction ensures longevity of the LED with White integral dome and Plug-and-Play Remote Driver included. With an ultra shallow profile of merely 1½" deep coupled with IC and Airtight rating, this Indirect Downlight is perfect for tight spaces such as soffits, insulated and suspended ceilings as well as installations directly below ceiling joists. The fixture installs flush to ceiling with no Housing required for Remodel applications and New Construction Mounting Frame is optional. It is Triac dimmable.

ANODIZED ALUMINUM	120V AC	TRIAC DIMMABLE	100° BEAM	RECESSED TRIM	CANLESS	IC RATED	AIRTIGHT	CUT OUT 6 ¼" (159 mm)	INDOOR	L70 50,000 HOURS	5 YEAR WARRANTY	ETL US Intertek	T24 California Title 24 compliant
-------------------	---------	----------------	-----------	---------------	---------	----------	----------	-----------------------	--------	------------------	-----------------	-----------------	-----------------------------------

## SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	15 W
LUMENS	900 Lm
EFFICACY	60 Lm/W
CRI	90+
BEAM ANGLE	110°
DIMMING <sup>1</sup>	TRIAC
CUT-OUT	6 ¼" x 6 ¼" (159 mm x 159 mm)

RATINGS	IC, Airtight
ENVIRONMENT	Indoor - Dry
CERTIFICATIONS	cETLus   California Title 24 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Integrated white dome and remote driver
OPTIONAL	New construction frame
WARRANTY <sup>2</sup>	5 years

<sup>1</sup> Effectively dim down to 10%


<sup>2</sup> See published warranty terms for detailed information

## PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE <sup>3</sup>	LUMEN <sup>4</sup>	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K)	900 Lm	15 W	60 Lm/W	90+

<sup>3&4</sup> CCT within +/-10%

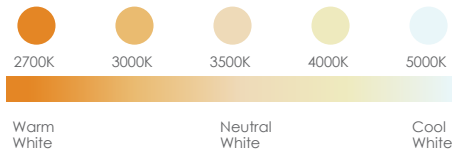

## ORDERING INFO


Light Engine with LED



MODEL  
RLF-6315-SW5-WH

## OPTIONAL ACCESSORY

(Sold separately)



MODEL  
RLH-346S-NC-UNI  
Universal mounting plate with hanger bars.  
For cutout sizes: 3", 4 ¼" or 6 ¼"


# RLF-6315-SW5

6" SQUARE INDIRECT EDGELIT  
LED RECESSED DOWNLIGHTS



Fixture Type
Project
Notes

## TECHNICAL DRAWING

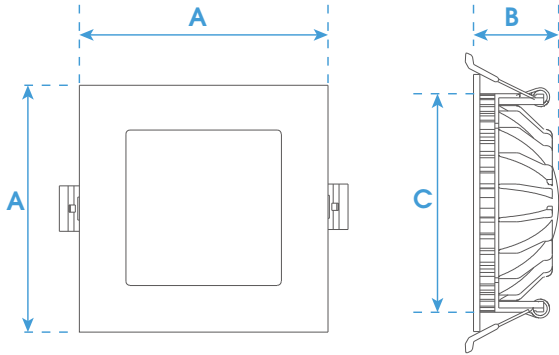

### DIMENSIONS

<b>A</b>	6 3/4" x 6 3/4"	171 mm x 171 mm
<b>B</b>	2"	51 mm
<b>C</b>	5 7/8"	150 mm

## COMPATIBLE DIMMERS

<b>COOPER</b>	SI06P
<b>LEVITON</b>	6621, 6672, IPL06-10Z
<b>LUTRON</b>	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P