




RS5500BA
5" NEW CONSTRUCTION • NON-IC AIRTIGHT
LINE VOLTAGE
RECESSED DOWNLIGHTS

Type	
Project	
Catalog No.	

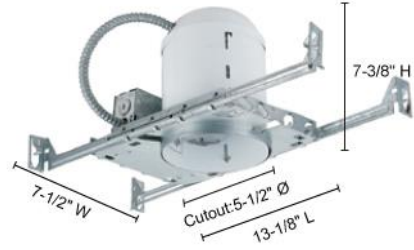

ORDERING INSTRUCTIONS

MODEL: RS5500BA

DESCRIPTION

- 5" New Construction Non-IC Airtight Line Voltage Housing
- Thermally protected, listed for damp locations.
- UL listed for feed-through branch circuit wiring.
- Dimmable with incandescent dimmers.
- J-box accessible through ceiling cut-out.
- Non-IC units require 3-inch of clearance on all sides.
- Dimensions: 7-1/2"W x 13-1/8"L x 7-3/8"H
- Hanger Bars: adjustable up to 24"
- Cut-Out: 5-1/2"Ø

LAMPS:

120V PAR20, PAR30, R20, R30, A19 75W Max. Sold separately.

WIRING:

Housing is supplied with thermal protector.

OTHER OPTIONS



RS5500BICA

New Construction IC Airtight Line Voltage Housing
 120V PAR30, PAR20, R30, R20, A19
 50W Max.

Dimensions: 7-1/2"W x 13-1/8"L x 7-3/8"H
Hanger Bars: adj. Up to 24"
Cutout: 5-1/2"Ø



RS5500R

Remodel Non-IC Line Voltage Housing
 120V PAR30, PAR20, R30, R20, A19
 75W Max.

Dimensions: 6-1/8"W x 13-1/2"L x 7-1/4"H
Cutout: 5-1/2"Ø



RS5500RICA

Remodel IC Airtight Line Voltage Housing
 120V PAR30, PAR20, R30, R20, A19
 50W Max.

Dimensions: 6-1/8"W x 13-1/2"L x 7-1/4"H
Cutout: 5-1/2"Ø