




SD-130-TR

SHOWCASE AND DISPLAY LIGHT
ORIONIS SERIES

Type	
Project	
Catalog No.	

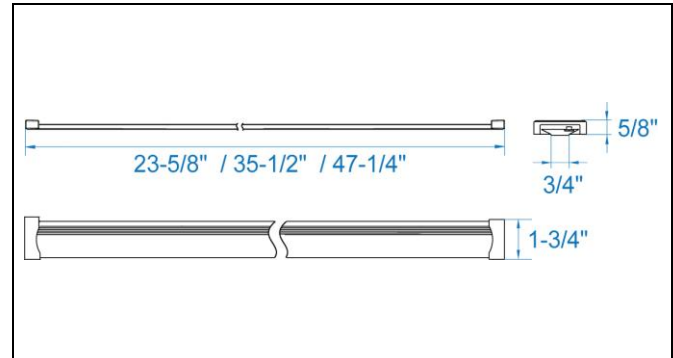

SPECIFICATIONS

Model	SD-130-TR2-S	SD-130-TR3-S	SD-130-TR4-S
Voltage	24V DC		
Finish*	Silver (Standard)		
Operating Temperature	-4°F – 95°F		
Dimensions	23-5/8"L x 1-3/4"W x 5/8"H	35-1/2"L x 1-3/4"W x 5/8"H	47-1/4"L x 1-3/4"W x 5/8"H
Mounting*	3 Screws	4 Screws	5 Screws
Maximum Fixtures†	4 x SD-131 or SD-132	6 x SD-131 or SD-132	8 x SD-131 or SD-132
Environment	Dry		
Warranty	JESCO WSL Discontinued/Overstock items are final sale, non-returnable, and include a 90-day warranty against defects from the invoice date, superseding all prior stated warranties in print, online, or any other form.		

* View installation instructions for more information.

† Number of fixtures is determined by the power supply. View wiring diagram for more information.

DESCRIPTION

The SD-130 track is an ultra slim track. The SD-131 and SD-132 fixtures can move freely along the track. See accessory page for more information. SD-131 and SD-132 fixtures sold separately. SD-130-LE and SD-130-EC is included.



ORDERING INSTRUCTIONS

Example:	MODEL	TRACK LENGTH	FINISH
	SD130	TR2 – 2 feet	S – Silver
		TR3 – 3 feet	B – Black *
		TR4 – 4 feet	W – White *

* Custom option. Consult factory for availability. MOQ requirements may apply.

WIRING DIAGRAM

A.	B.	C.	D.	E.
PS-CV-24/06-HW	DB-CV-HW-PC-4	SD-130-TR2	SD-131 SD-132	PS-120-PC-59 (Optional)
PS-CV-24/15-PC-6	DB-CV-HW-PC-6	SD-130-TR3		
PS-CV-24/30-HW	DB-CV-HW-PC-12	SD-130-TR4		

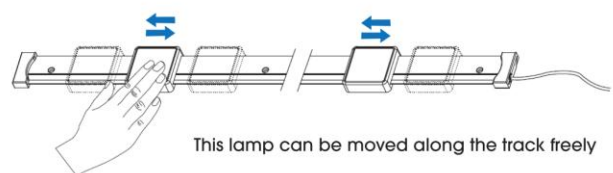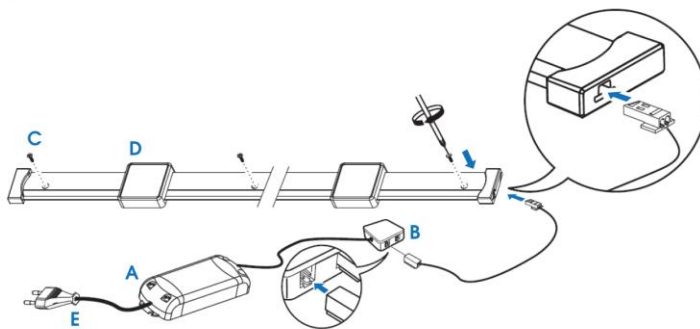



SD-130-TR

SHOWCASE AND DISPLAY LIGHT
ORIONIS SERIES

Type	
Project	
Catalog No.	

ACCESSORIES



SD-131
Orionis Fixture – Square
2 Watts per fixture
Dimensions: 2-1/8" x 2-1/8"



SD-132
Orionis Fixture – Round
1.8 Watts per fixture
Dimensions: 2-9/32" x 3/4"H



SD-130-EC
End Cap for SD-130 Track.
Included with fixture.



SD-130-LE:
Live End
Cable: (59") 24AWG with AMP connector.
Included with fixture.



PS-CV-24/06-HW
Power Supply
Rated Input: AC 100-120V
Output: 24VDC
Constant Voltage: 6W
Op. Temperature: Max. 113°F
Cable: (59") SPT-2 18AWG
Dimensions: 2-3/4"L x 1-7/16"W x 7/8"H



PS-CV-24/15-PC-6
Power Supply
Includes PS-120-PC-59 and DB-CV-HW-PC-6
Rated Input: AC 100-120V
Output: 24VDC
Constant Voltage: 15W
Op. Temperature: Max. 113°F
Cable: (59") SPT-2 18AWG
Dimensions: 4-7/8"L x 1-7/8"W x 15/16"H



PS-CV-24/30-HW:
Power Supply
Rated Input: AC100-240V
Output: 24VDC
Constant Voltage: 30W
Op. Temp.: Max. 113°F
Dimensions: 4-7/8"L x 1-7/8"W x 15/16"H



DB-CV-HW/PC-4
4 Port Constant Voltage Distribution Block
Port Type: Plug C
Max. Connectable Lamps: 4pcs
Cable: (5-7/8 ") SPT-2 18AWG
Dimensions: 1-1/2"L x 1-5/16"W x 9/16"H



DB-CV-HW/PC-6
6 Port Constant Voltage Distribution Block
Port Type: Plug C
Max. Connectable Lamps: 6pcs
Cable: (5-7/8 ") SPT-2 18AWG
Dimensions: 2-3/4"L x 1-1/4"W x 11/16"H



DB-CV-HW/PC-12
12 Port Constant Voltage Distribution Block
Port Type: Plug C
Max. Connectable Lamps: 12pcs
Cable: (5-7/8 ") SPT-2 18AWG
Dimensions: 2-3/4"L x 1-1/4"W x 11/16"H



PS-120-PC-59
Cable: (59") SPT-2 18AWG
120V power connector with 2 prong plug

WHILE SUPPLIES LAST



SD-130-TR

SHOWCASE AND DISPLAY LIGHT
ORIONIS SERIES

Type	
Project	
Catalog No.	



SD-130-PF

Power Feed for SD-130-TRx
Can replace SD-130-EC

Port Type: PG

Input: 24V DC

Dimensions: 1-1/2"L x 1-3/4"W x 1/2"H




SD-130-PF-DIM

Touch sensitive dimmable power feed for
SD-130-TRx. Smooth dimming.

Port Type: PG

Input: 24V DC

Dimensions: 2"L x 1-3/4"W x 1/2"H



SD-130-DC

Direct Connector for SD-130-TRx.
Only compatible with SD-130-PF.

Plug Type: PG

Dimensions: 13/16"L x 1-3/4"W x 1/2"H



PC-PC-PG-xx

Power Connector. Connects SD-130-PF or
SD-130-PF-DIM to DB-CV-HW/PC-x.

Plug Type: PC/PG

Cable: (5-7/8 ") SPT-2 18AWG