




**TM209**

**RECESSED LIGHTING**  
4" APERTURE LINE VOLTAGE TRIMS

Type	
Project	
Catalog No.	

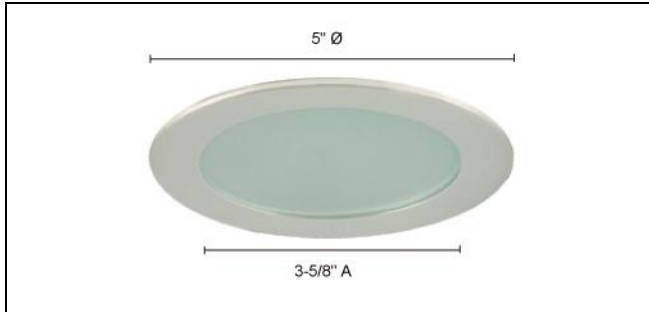

**CATALOG INFORMATION**

MODEL	TRIM FINISH
TM209	AB - Antique Bronze
	ST - Satin Chrome
	WH - White

**Ordering Instructions**  
Example: MODEL - FINISH  
TM209 - ST

**DESCRIPTION**

- Recessed Lighting – Flat Showe Trim With Frosted Glass 4" aperture Line Voltage trim.
- Use PAR16, PAR20 120V 50W Max.
- Ideal for use in ceilings, cabinets and displays.
- Includes gasket for use in damp locations
- Dimensions: 3-5/8" A x 5" Ø
- Listings: UL and C-UL listed.

**COMPATIBLE LINE VOLTAGE HOUSINGS**



**RS2000B**  
Non-IC Universal Housing for New Construction  
PAR16/20 120V 50W  
**Dimensions:** 5-1/4"W x 8"L x 5-1/2"D  
**Hanger Bars:** adj. 14-1/2"~ 24-1/2"  
**Cutout:** 4-3/8"Ø



**RS2000IC**  
IC Housing for New Construction  
PAR16/20 120V 50W  
**Dimensions:** 5-1/4"W x 8"L x 6"D  
**Hanger Bars:** adj. 14-1/2"~ 24-1/2"  
**Cutout:** 4-3/8"Ø



**RS2000R**  
Non-IC Housing for Remodel  
PAR16/20 120V 50W  
**Dimensions:** 4-5/8"W x 12"L x 5-1/2"D  
**Cutout:** 4-3/8"Ø

**COMPATIBLE LINE VOLTAGE HOUSINGS**



**RS2000BA**  
Non-IC Airtight Universal Housing for New Construction  
PAR16/20 120V 50W  
**Dimensions:** 5-1/4"W x 8"L x 5-1/2"D  
**Hanger Bars:** adj. 14-1/2"~ 24-1/2"  
**Cutout:** 4-3/8"Ø



**RS2000ICA**  
IC Airtight Housing for New Construction  
PAR16/20 120V 50W  
**Dimensions:** 5-1/4"W x 8"L x 6"D  
**Hanger Bars:** adj. 14-1/2"~ 24-1/2"  
**Cutout:** 4-3/8"Ø



**RS2000RA**  
Non-IC Airtight Housing for Remodel  
PAR16/20 120V 50W  
**Dimensions:** 4-5/8"W x 12"L x 5-1/2"D  
**Cutout:** 4-3/8"Ø