

LED LAMPS AND APPLICATIONS



VINTAGE LED LAMPS & APPLICATIONS



LL-A19VS-180-22
A19 Victorian Vintage LED Lamp
 Input: 120V AC
 Watt: 3.5W
 Base: E26 Medium
 Lumen: 180 Lm (40W equivalent)
 Efficacy: 51.4 Lm/W
 CCT: 2200K
 Dimming: ELV
 Dims: 2.4" Ø x 3.9" H
 LED Life: 30,000 hours



LL-A19ST-350-27
A19 Silver Tip Vintage LED Lamp
 Input: 120V AC
 Watt: 3.5W
 Base: E26 Medium
 CCT: 2700K
 Lumen: 350 Lm (40W equivalent)
 Efficacy: 100 Lm/W
 Dimming: ELV
 Dims: 2.35" Ø x 4.35" H
 LED Life: 30,000 hours



LL-ST19E-180-22
LL-ST19E-300-22
ST19 Edison Vintage LED Lamp
 Input: 120V AC
 Watt: 3.5W
 Base: E26 Medium
 CCT: 2200K
 Lumen: **180** -180 Lm (40W equivalent)
 300 - 300Lm (60W equivalent)
 Efficacy: 51.4 Lm/W (180 Lm)
 85.7 Lm/W (300Lm)
 Dimming: ELV
 Dims: 2.2" Ø x 5.0" H
 LED Life: 30,000 hours



LL-ST21E-180-22
ST21 Edison Vintage LED Lamp
 Input: 120V AC
 Watt: 3.5W
 Base: E26 Medium
 CCT: 2200K
 Lumen: 180 Lm (40W equivalent)
 Efficacy: 51.4 Lm/W
 Dimming: ELV
 Dims: 2.4" Ø x 5.4" H
 LED Life: 30,000 hours



LL-G25-180-22
G25 Globe Vintage LED Lamp
 Input: 120V AC
 Watt: 3.5W
 Base: E26 Medium
 CCT: 2200K
 Lumen: 180 Lm (40W equivalent)
 Efficacy: 51.4 Lm/W
 Dimming: ELV
 Dims: 3.1" Ø x 4.4" H
 LED Life: 30,000 hours




LL-T10-300-22
T10 Tubular Vintage LED Lamp
 Input: 120V AC
 Watt: 3.5W
 Base: E26 Medium
 CCT: 2200K
 Lumen: 300 Lm (60W equivalent)
 Efficacy: 85.7 Lm/W
 Dimming: ELV
 Dims: 1.25" Ø x 7.5" H
 LED Life: 30,000 hours



ENVISAGE VI

LINE VOLTAGE RETRO PENDANT
 with Low Profile Round Ceiling Canopy &
 Nylon Braided Cable

PD465-GPAN
 PD465-GPBR

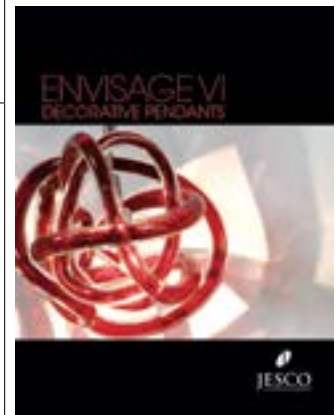

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LL-MR16-6W-38-2780
LL-MR16-6W-38-3080
LL-MR16-6W-38-4080
COB LED 12V GU5.3 MR16 LAMP
 Input: 12V AC/DC
 Watt: 6W (40W equivalent)
 Base: GU5.3
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 450 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 1.89" H



LL-MR16-7HW-40-2780
LL-MR16-7HW-40-3080
LL-MR16-7HW-40-4080
LED 12V GU5.3 MR16 LAMP
 Input: 12V AC/DC
 Watt: 7.5W (50W equivalent)
 Base: GU5.3
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 650 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 1.89" H



DOWNLIGHTS


3" LOW VOLTAGE

LV3001B, LV3001-ICA, LV3001R, LV3001R-E



4" LOW VOLTAGE

LV4000B, LV4000BA, LV4000IC, LV4000ICA, LV4000R, LV4000RA

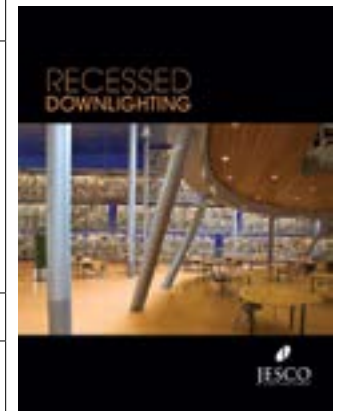

MODULINEAR

MINI MODULINEAR

MMG 1650, MMGR 1650




DOUBLE GIMBAL MR16

MG 1650, MGR 1650



TRACKHEADS

LV102, LV109, LV132

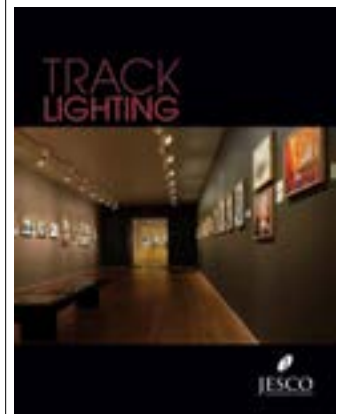

MR16 GU10 LED LAMPS & APPLICATIONS



LL-MR16GU10-6W-38-2780
LL-MR16GU10-6W-38-3080
LL-MR16GU10-6W-38-4080
COB LED 120V AC GU10 MR16 LAMP
 Input: 120V AC
 Watt: 6W (40W equivalent)
 Base: GU10
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 450 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 2.20" H



LL-MR16GU10-7HW-40-2780
LL-MR16GU10-7HW-40-3080
LL-MR16GU10-7HW-40-4080
LED 120V AC GU10 MR16 LAMP
 Input: 120V AC
 Watt: 7.5W (50W equivalent)
 Base: GU10
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 650 Lm @3000K
 Dimming: ELV
 Dims: 2" Ø x 2.20" H



DOWNLIGHTS


3" LINE VOLTAGE

RS3001B, RS3001-ICA, RS3001R



4" LINE VOLTAGE


RS2000B, RS2000BA, RS2000IC, RS2000ICA, RS2000R, RS2000RA
 (with AC-E26/GU10 Socket Adapter)

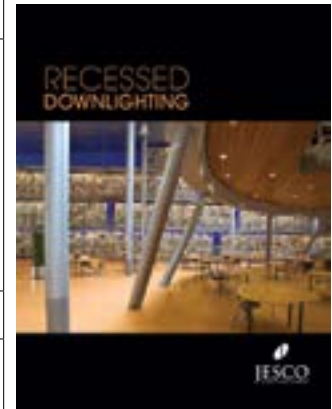

MODULAR


LINE VOLTAGE MR16

MMG GU1050, MMGR GU1050

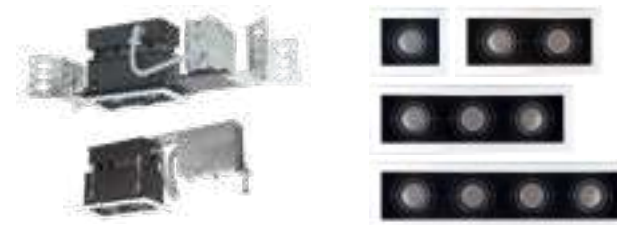

TRACKHEADS

HV210, HV610

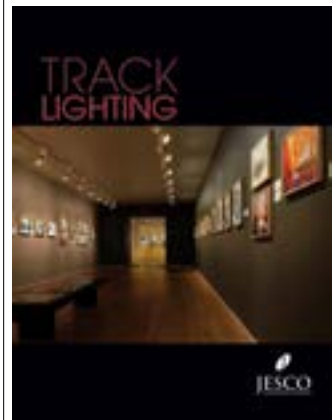

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

PAR20/BR20 LED LAMPS & APPLICATIONS

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov




LL-P20-7W-36-2780
LL-P20-7W-36-3080
LL-P20-7W-36-4080
COB LED 120V AC PAR20 LAMP
 Input: 120V AC
 Watt: 7W (50W equivalent)
 Base: Medium
 Beam: 35°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 550 Lm @3000K
 Dimming: ELV
 Dims: 2.52" Ø x 3.43" H

DOWNLIGHTS

4" LINE VOLTAGE

RS2000B, RS2000BA, RS2000IC, RS2000ICA, RS2000R, RS2000RA

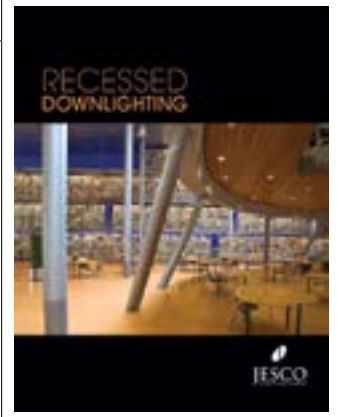

MODULINEAR

DOUBLE GIMBAL PAR20


MG P20, MGR P20



LL-BR20-7W-100-2780
LL-BR20-7W-100-3080
LL-BR20-7W-100-4080
COB LED 120V AC BR20 LAMP
 Input: 120V AC
 Watt: 7W (50W equivalent)
 Base: Medium
 Beam: 100°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 550 Lm @3000K
 Dimming: ELV
 Dims: 2.48" Ø x 3.42" H

TRACKHEADS

HV303, HV220, HV650

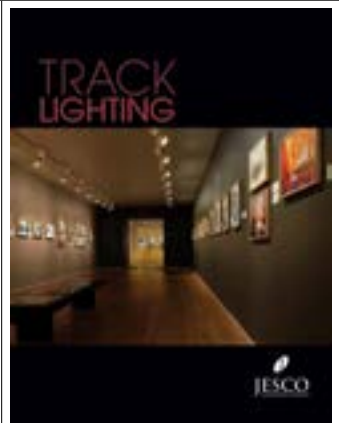

PAR30/BR30 LED LAMPS & APPLICATIONS




LL-P30-12W-40-2780
LL-P30-12W-40-3080
LL-P30-12W-40-4080
COB LED 120V AC PAR30 LAMP
 Input: 120V AC
 Watt: 12W (75W equivalent)
 Base: Medium
 Beam: 40°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 950 Lm @3000K
 Dimming: ELV
 Dims: 3.78" Ø x 4.61" H

DOWNLIGHTS

5" LINE VOLTAGE

RS5500BA, RS5500BICA, RS5500R, RS5500RICA

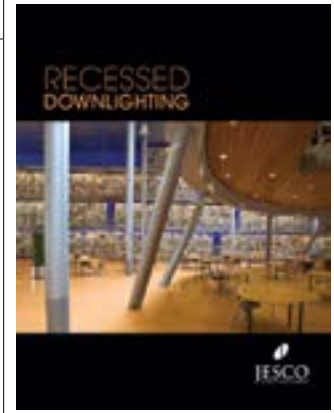

MODULINEAR

DOUBLE GIMBAL PAR30

MG P30, MGR P30



LL-BR30-12W-100-2780
LL-BR30-12W-100-3080
LL-BR30-12W-100-4080
COB LED 120V AC BR30 LAMP
 Input: 120V AC
 Watt: 12W (75W equivalent)
 Base: Medium
 Beam: 100°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 1000 Lm @3000K
 Dimming: ELV
 Dims: 3.78" Ø x 4.64" H




ADJUSTABLE YOKE PAR30

MY P30



TRACKHEADS

HV303, HV230, HV650

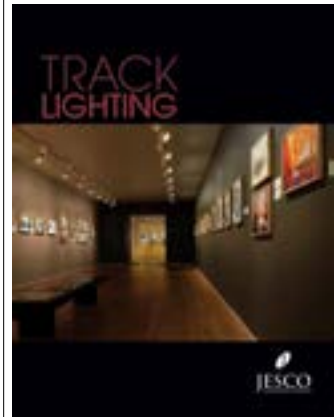

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

PAR38 LED LAMPS & APPLICATIONS



LL-P38-16W-40-2780
LL-P38-16W-40-3080
LL-P38-16W-40-4080
COB LED 120V AC PAR38 LAMP
 Input: 120V AC
 Watt: 16W (100W equivalent)
 Base: Medium
 Beam: 40°
 CCT/CRI: **2780** (2700K, 80+ CRI)
 3080 (3000K, 80+ CRI)
 4080 (4000K, 80+ CRI)
 Lumen: 1250 Lm @3000K
 Dimming: ELV
 Dims: 4.80" Ø x 5.15" H



DOWNLIGHTS


6" LINE VOLTAGE

RS6000BA, RS6000BICA, RS6000S, RS6000R,
 RS6000RA, RS6000RICA, RS6000SR



6" LINE VOLTAGE SLOPED CEILING

RS6000NIC-SL, RS6000N-SL, RS6000RIC-SL, RS6000R-SL

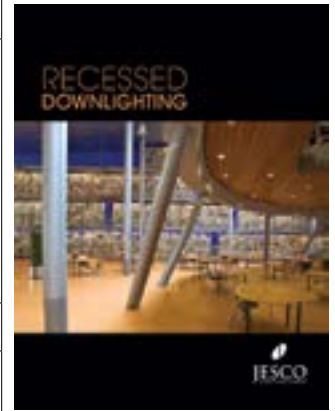

MODULINEAR

DOUBLE GIMBAL PAR38

MG P38, MGR P38




ADJUSTABLE YOKE PAR38

MY P38



TRACKHEADS

HV303, HV238, HV650

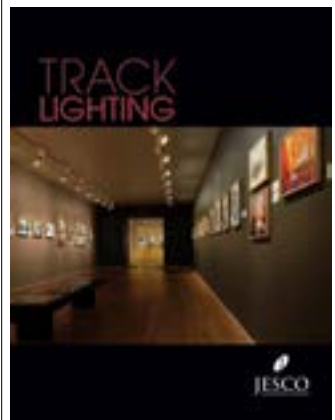



For more details and product specifications please visit JESCOLIGHTING.COM



**NEW YORK
CORPORATE OFFICE**

15 Harbor Park Drive
Port Washington NY 11050
TEL 800 527 7796
FAX 855 265 5768

LOS ANGELES

219 South 6th Avenue
City Of Industry CA 91746
TEL 626 333 3661
TEL 855 654 0110
FAX 626 333 2955

DALLAS SHOWROOM

Dallas Trade Mart
Showroom TM 4313
2100 N. Stemmons Freeway
Dallas TX 75207

JESCOLIGHTING.COM
info@jescolighting.com

© 2017 JESCO LIGHTING

LCAT-LED-LAMPS3

