


LED INDIRECT RECESSED DOWNLIGHTS



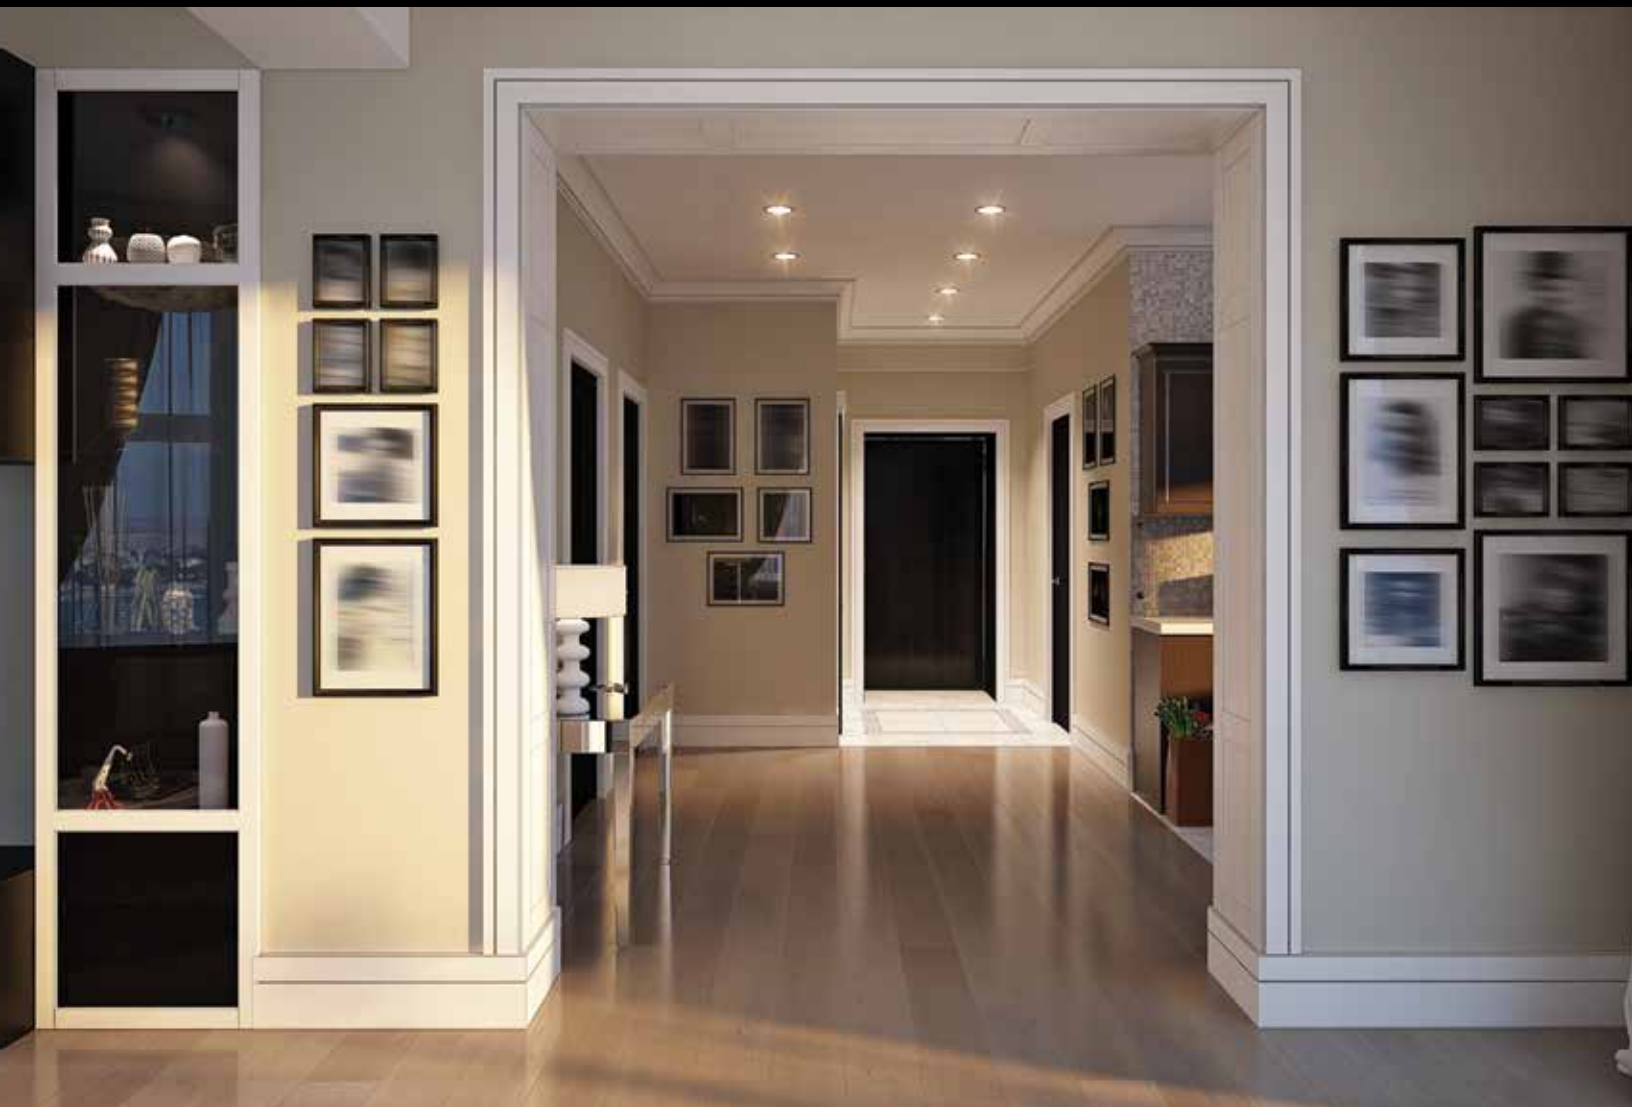


JESCO continues to be your go-to source for recessed downlights to help you meet almost every design challenge. We offer standard fixed downlights, premier adjustable downlights, as well as LED conversion kits to retrofit legacy incandescent and halogen downlights - all utilizing high-output LEDs and available in 1" - 8" diameter aperture sizing for the architectural, commercial and residential markets.

We are proud to introduce our latest model with a can-less design, providing a low-profile and an easy installation.

Our new Indirect Downlight in Round and Square styles provides brilliant light without all that unwanted glare. The LEDs are positioned at the edge of the dome, pointing upward to bounce the smoothly distributed light downward where needed below. No visible visible light source means that glare is eliminated making it the ideal choice - especially for low ceilings.

JESCO's low-profile recessed fixtures can help you meet all your your lighting design goals.

INDIRECT DOWNLIGHT UNIQUE FEATURES:

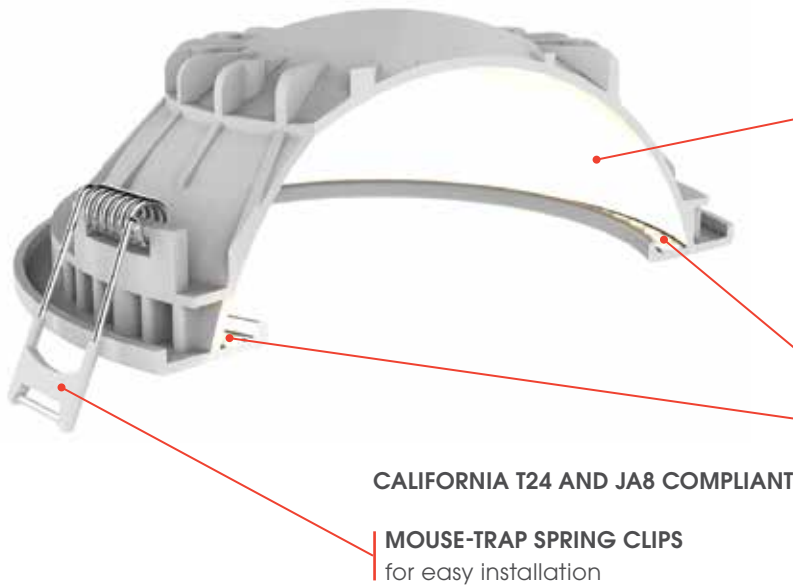


DOME REFLECTOR

The dome evenly reflects the LED light output and softly distributes the reflected light downward. No visible COB LEDs or uncomfortable glare make it the ideal choice - especially for low ceilings.

INDIRECT LED LIGHT SOURCE

LEDs are positioned at the edge of the trim pointing up into the engineered reflecting dome instead of pointing directly down. As the light bounces off the dome, light is redistributed evenly on the floor below. As you pass under the fixture you see no unwanted visual glare, only a soothing and efficient light source.


HOW LOW CAN YOU GO?

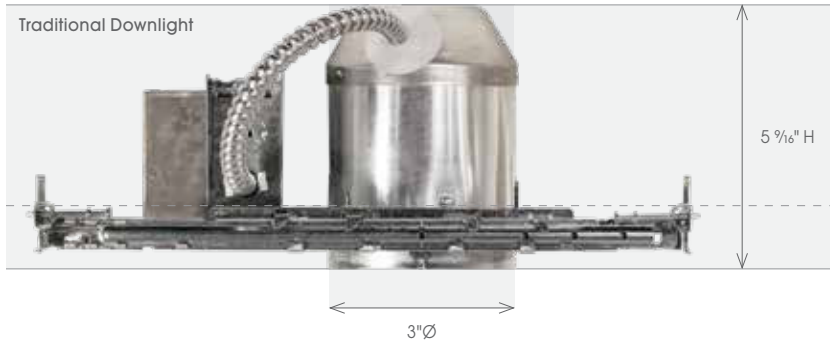

LEGACY DESIGN

A **Traditional Downlight** features a large bulky can that dominates the fixture and takes up a lot of plenum space, making it cumbersome to install as well as difficult to cover with insulation easily.

JESCO's Indirect Downlight

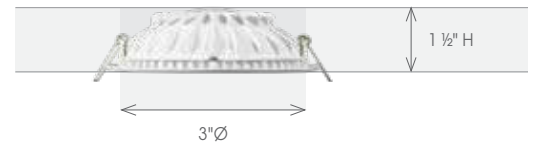

JESCO's NEW SPACE SAVING DESIGN

The **Indirect Downlight** offers a very low profile as well as totally eliminating glare. Its remote driver can be placed anywhere within the plenum, avoiding trouble spots, for easy installation.

The low profile of the fixture also makes this IC- and Airtight-rated downlight effortless to cover properly with insulation batt or blown-in insulation - saving time with installation and greatly reducing air leakage compared to a traditional tall can design.

INDIRECT ROUND LED DOWNLIGHTS



RLF-3112

3" Round Aperture Indirect Downlight



Inner Aperture: 3" Ø
 Outside Dims: 4 3/4" Ø × 1 1/2" H
 Dimming: TRIAC (100%-10%)

RLF-5115

5" Round Aperture Indirect Downlight



Inner Aperture: 5" Ø
 Outside Dims: 6 3/4" Ø × 2" H
 Dimming: TRIAC (100%-10%)


† 3000K, 3500K & 4000K only

HIGHLIGHTS

- Engineered round dome design provides perfectly diffused light output
- High output LEDs positioned pointing upward, providing an indirect downlight and eliminating glare
- CRI > 90 to bring out the true colors of any object
- Solid cast aluminum structure
- Can-less design for easy installation in tight plenum spaces
- Positive lock cable between fixture and remote driver
- Easy installation with mouse-trap spring clips for remodel applications
- Optional New Construction Mounting Plate available with snap-on locations for the fixture and junction box
- Remote junction box, containing the driver, is listed for through-wiring and supplied with 2 knockouts
- IC & Airtight rated. CCTs of 3000K, 3500K & 4000K are California T24 and JA8 compliant.



Driver is installed in remote junction box - included with fixture. Junction box is listed for feed-through wiring. A positive-lock cable joins the fixture and the remote driver. Junction box dimensions: 3 1/2" L x 3 1/2" W x 1 3/8" H

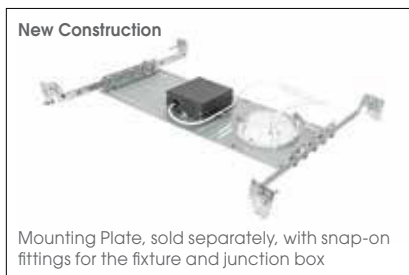

Mounting Plate, sold separately, with snap-on fittings for the fixture and junction box

ACCESSORIES:

RLF-31F
 New Construction Mounting Plate for RLF-3112

RLF-51F
 New Construction Mounting Plate for RLF-5115

TO ORDER

MODEL	SIZE	WATTS	CCT/CRI	TRIM
RLF				
	31 - 3" Round	12 - 12W	3090 - 3000K 90CRI†	WH - White
	51 - 5" Round	15 - 15W	2790 - 2700K 90CRI* 3590 - 3500K 90CRI*† 4090 - 4000K 90CRI*† 5090 - 5000K 90CRI*	

* Contact factory

† California Title 24 and JA8 compliant

Order number above for Remodel applications.
 For New Construction applications, add appropriate New Construction Mounting Plate - sold separately.
 Product specifications subject to change without notice.

INDIRECT SQUARE LED DOWNLIGHTS



RLF-3312

3" Square Aperture Indirect Downlight



Inner Aperture: 3" x 3"

Outside Dims: 4 3/4" x 4 3/4" x 1 1/2" H

Dimming: TRIAC (100%-10%)

RLF-5315

5" Square Aperture Indirect Downlight



Inner Aperture: 4 3/4" x 4 3/4"

Outside Dims: 6 3/4" x 6 3/4" x 2" H

Dimming: TRIAC (100%-10%)

† 3000K, 3500K & 4000K only

HIGHLIGHTS


- Engineered square dome design provides perfectly diffused light output
- High output LEDs positioned pointing upward, providing an indirect downlight and eliminating glare
- CRI > 90 to bring out the true colors of any object
- Solid cast aluminum structure
- Can-less design for easy installation in tight plenum spaces
- Positive lock cable between fixture and remote driver
- Easy installation with mouse-trap spring clips for remodel applications
- Optional New Construction Mounting Plate available with snap-on locations for the fixture and junction box
- Remote junction box, containing the driver, is listed for through-wiring and supplied with 2 knockouts
- IC & Airtight rated. CCTs of 3000K, 3500K & 4000K are California T24 and JA8 compliant.



Driver is installed in remote junction box - included with fixture. Junction box is listed for feed-through wiring.

A positive-lock cable joins the fixture and the remote driver.

Junction box dimensions:
3 1/2" L x 3 1/2" W x 1 3/8" H

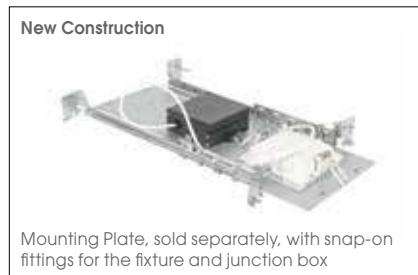

Mounting Plate, sold separately, with snap-on fittings for the fixture and junction box

ACCESSORIES:

RLF-33F
New Construction Mounting Plate for RLF-3312

RLF-53F
New Construction Mounting Plate for RLF-5315

TO ORDER

MODEL	SIZE	WATTS	CCT/CRI	TRIM
RLF				
	33 - 3" Square	12 - 12W	3090 - 3000K 90CRI†	WH - White
	53 - 5" Square	15 - 15W	2790 - 2700K 90CRI* 3590 - 3500K 90CRI*† 4090 - 4000K 90CRI*† 5090 - 5000K 90CRI*	

* Contact factory

† California Title 24 and JA8 compliant

Order number above for Remodel applications.


For New Construction applications, add appropriate

New Construction Mounting Plate - sold separately.

Product specifications subject to change without notice.

JESCO DOWNLIGHT LINEUP

PREMIER ADJUSTABLE

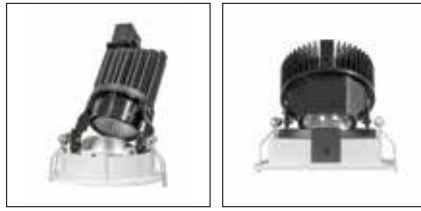

ARCHITECTURAL



COMMERCIAL / RESIDENTIAL




DOWNLIGHTS 4" - 8"



MINATURE DOWNLIGHTS 1" - 4"



MICROLINEAR


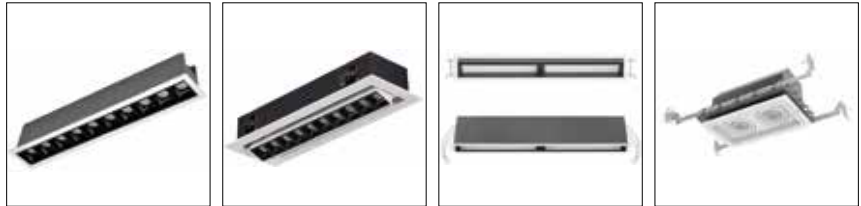



INDIRECT



RETROFITS



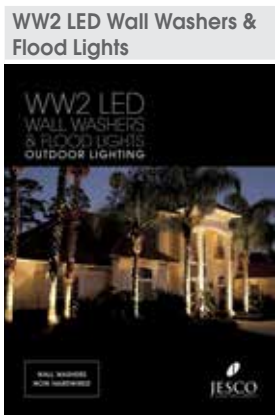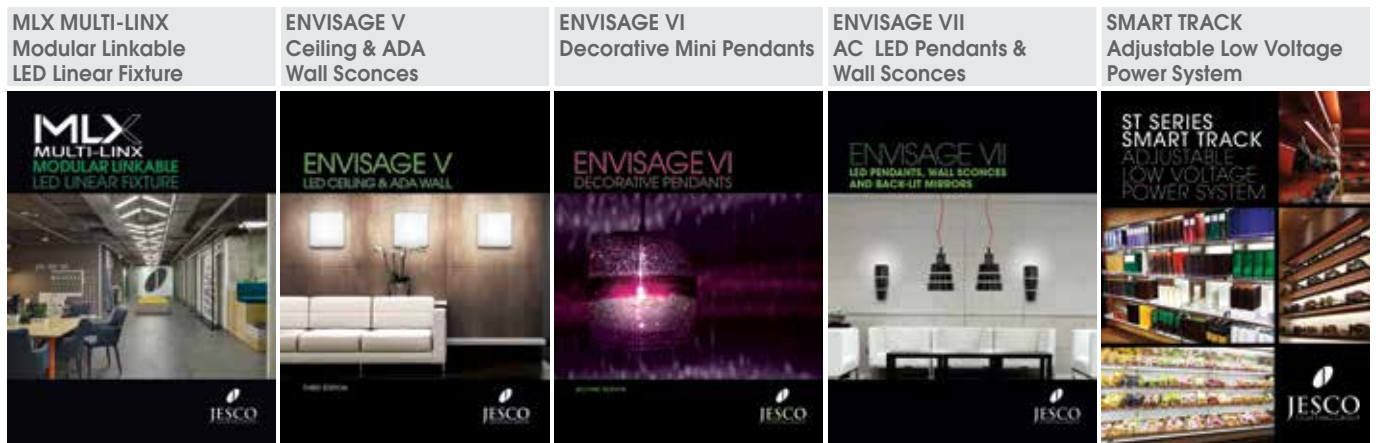

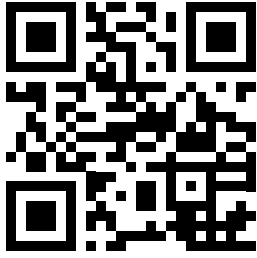

For more details and product specifications please visit JESCOLIGHTING.COM



**NEW YORK
CORPORATE OFFICE**

15 Harbor Park Drive
Port Washington NY 11050
TEL 800 527 7796
FAX 855 265 5768

LOS ANGELES

219 South 6th Avenue
City of Industry CA 91746
TEL 626 333 3661
TEL 855 654 0110
FAX 626 333 2955

DALLAS SHOWROOM

Dallas Trade Mart
Showroom TM 4313
2100 N. Stemmons Freeway
Dallas TX 75207

JESCOLIGHTING.COM
info@jescolighting.com

© 2020 JESCO Lighting

LCAT-REC-INDIRECT

