INFINA®

DL-AC-FLEX2-LNDB-RGBW
RUN LENGTH CONFIGURATOR

Intertek

CUSTOMER_____

PURCHASE ORDER NO._____ DATE_____

❶ MOUNTING OPTIONS

MOUNTING CLIPS

- -MC — Plastic Mounting U Clip
- -BR — Metal Mounting Bracket



CHANNELS

- -CH3 — 38 Inch Metal Mounting Channel
- -CH33-BEND — 33 Feet Bendable Metal Channel

❷ CONTROL OPTIONS

DMX CONTROLLER

- LC-PC-100
- LC-PC-400
- LC-PC-500
- LC-RF-510-RGBWW

Requires 24V power supply

- LC-PC-600
- LC-RF-600H-RGBW

Remote controller for LC-PC-600

LINE VOLTAGE INTERFACE required must select one

- LC-AC-600-INT — For use with run up to 100FEET
- LC-AC-1000-INT — For use with run up to 130FEET

❸ LOCATION

TYPE	QTY

❹ INPUT OPTIONS

DL-FLEX2-LNDB-RGBW-
PC-HW20 | CC06-I | CC to Prev. Sec.

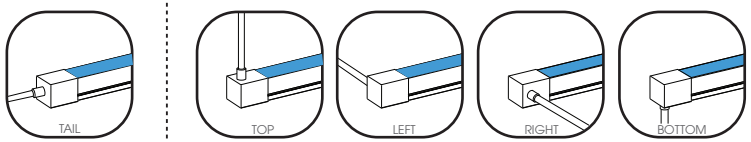

Must choose a side for assembling the input connector

INPUT TYPE	INPUT SIDE

❺ LENGTH

MAX RUN LENGTH:
130FT

ENTER BY FEET
FT
FT
FT
FT
FT
FT
FT
FT
FT
FT
FT
FT
FT

❻ OUTPUT OPTIONS

DL-FLEX2-LNDB-RGBW-
CC06-O | CC12 | CC24

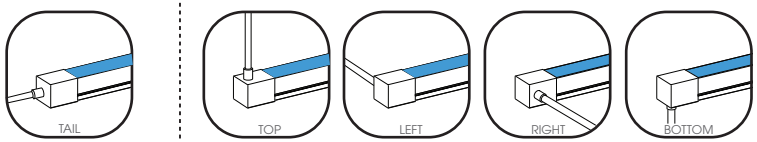

Must choose a side for assembling the input connector

OUTPUT	OUTPUT SIDE

For every 5 Feet of connecting cable – add 1 linear foot of FLEX2 strip to calculate the overall max run.
Example: 80 feet of FLEX2 strip + 15 feet of connecting cables (+3 linear feet) = 83 feet overall length

JESCO LIGHTING GROUP
Tel: 800.527.7796 Fax: 855.265.5768
quotations@jescolighting.com

© 2024 JESCO LIGHTING GROUP, LLC