



MMT-TRK

MAGNETRAX™ DISPLAY
MINI MAGNETIC TRACK

Type	
Project	
Catalog No.	



DESCRIPTION

JESCO's new MAGNETRAX™ Mini Magnetic Track "brings back the fun to functional". Our discreet, low-profile magnetic track can be mounted horizontally or vertically anywhere power is needed. There is a wide range of fixed or adjustable LED mini-trackheads and linear lightbars that simply click anywhere along the track. The best feature is that all the diminutive trackheads can easily be moved as the contents of the display change over time – no need to worry about costly rewiring since all the trackheads are held and powered magnetically.

FEATURES

- Low-profile magnetic track can be mounted horizontally or vertically anywhere where power is needed
- Available in 19.7" (500mm), 39.4" (1000mm), 78.7mm" (2000mm)
- Track is field cuttable
- Suitable for mounting inside cabinet, under-cabinet or shelf mount
- 24V input voltage
- UL listed
- Available in black and white finish
- Max 24V CV, 96W per track, power feed and connector.
- To reduce risk of fire, do not install in a compartment smaller than 450 cubic/inches per 14.5W max

ORDERING INFORMATION

TRACK MODEL

MMT-TRK: Mini Magnetic Track

LENGTH

80: 78.3/4"
*20: 19.3/4"
*40: 39.1/4"

FINISH

BK: Black
*WH: White

Power Feeds and Connectors

- MMT-PC – Power feed connector
- MMT-MPCE – Magnetic Power Feed – wire from the end
- MMT-MPCS – Magnetic Power Feed – wire from the side
- MMT-CCE04 – Connecting Cable – wire from the end
- MMT-CCS04 – Connecting Cable – wire from the side
- MMT-LC – L connector

- MMT-IDC – Internal Direct Connector
- MMT-EC – End-Cap
- DB-CV-DC/PG-1 – Type G to DC Jack Adapter
- DB-CV-DC/PG-6 – 6 port type G Distribution Block with DC jack
- DB-CV-DC/PG-12 – 12 Port type G Distribution Block with DC jack
- DL-PS-PT-F – Female hardwire power connector

*Contact Factory



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

11/30/2020

Specifications subject to change without notice.




MMT-TRK

MAGNETRAX™ DISPLAY
MINI MAGNETIC TRACK

Type	
Project	
Catalog No.	



MMT-PC
Power Feed Connector

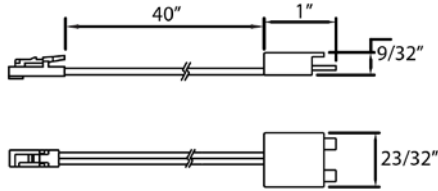

Power Feed Connector


Live end internal power feed, supplies power to the mini magnetic track. Connects on either end of the mini magnetic track

ORDERING INFORMATION

ITEM NO.	-	FINISH
MMT-PC		BK - Black *WH - White



MMT-MPCE
Magnetic Power Feed - wire from the end

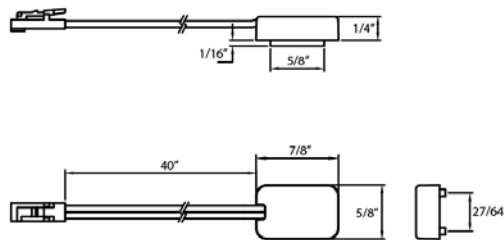

Magnetic Power Feed - wire from the end


Snaps onto the track with magnet, supplies power to the mini magnetic track. Connects on either end of the mini magnetic track

ORDERING INFORMATION

ITEM NO.	-	FINISH
MMT-MPCE		BK - Black *WH - White



MMT-MPCS
Magnetic Power Feed - wire from the side

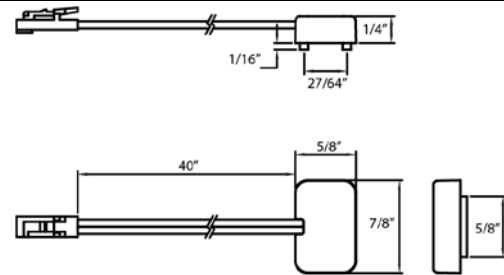

Magnetic Power Feed - wire from the side


Snaps onto the track with magnet, supplies power to the mini magnetic track. Connects on either end of the mini magnetic track

ORDERING INFORMATION

ITEM NO.	-	FINISH
MMT-MPCS		BK - Black *WH - White



MMT-CCE04
Connecting Cable - wire from the end

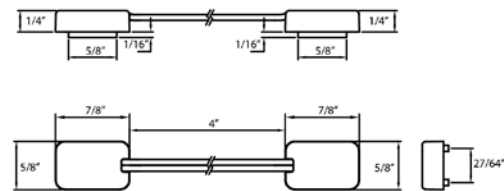

Connecting Cable - wire from the end


Connects two magnetic track pieces to go around corners. The wire comes out from the end of the connectors

ORDERING INFORMATION

ITEM NO.	-	FINISH
MMT-CCE04		BK - Black *WH - White



MMT-CCS04
Connecting Cable - wire from the side

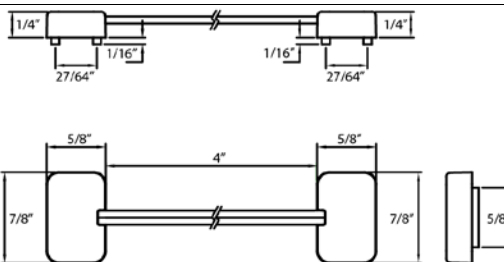

Connecting Cable - wire from the side


Connects two magnetic track pieces to go around corners. The wire comes out from the side of the connectors

ORDERING INFORMATION

ITEM NO.	-	FINISH
MMT-CCS04		BK - Black *WH - White



MMT-LC
L Connector

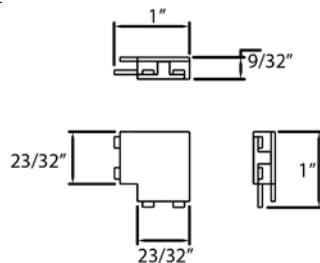

L Connector

Connects two magnetic track pieces to go around corners

ORDERING INFORMATION

ITEM NO.	-	FINISH
MMT-LC		BK - Black *WH - White



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

11/30/2020









Specifications subject to change without notice.



MMT-TRK

MAGNETRAX™ DISPLAY
MINI MAGNETIC TRACK

Type	
Project	
Catalog No.	

 <p>MMT-IDC Internal Direct Connector</p>		<p>Internal Direct Connector Internal direct connector to connect 2 tracks straight</p> <p>ORDERING INFORMATION</p> <p>ITEM NO. <input type="text"/></p> <p>MMT-IDC</p>
 <p>MMT-EC End-Cap</p>		<p>End-Cap End caps for the MMT-TRK.</p> <p>ORDERING INFORMATION</p> <p>ITEM NO. <input type="text"/> - FINISH <input type="text"/></p> <p>MMT-IDC</p> <p>BK – Black *WH – White</p>
 <p>DB-CV-DC/PG-1 Type G to DC Jack Adapter</p>	<p>1 Port Quick Connector 1 Port type G to DC Jack. 6" wire with barrel connector</p> <p>ORDERING INFORMATION</p> <p>ITEM NO. <input type="text"/></p> <p>DB-CV-DC/PG-1</p>	
 <p>DB-CV-DC/PG-6 6 Port type G Distribution Block with DC jack</p>	<p>6 Port Quick Connector 6 Port type G Distribution Block with DC jack. 40" wire with barrel connector</p> <p>ORDERING INFORMATION</p> <p>ITEM NO. <input type="text"/> - FINISH <input type="text"/></p> <p>DB-CV-DC/PG-6</p> <p>BK – Black *WH – White</p>	
 <p>DB-CV-DC/PG-12 12 Port type G Distribution Block with DC jack</p>	<p>12 Port Quick Connector 12 Port type G Distribution Block with DC jack. 6" wire with barrel connector</p> <p>ORDERING INFORMATION</p> <p>ITEM NO. <input type="text"/></p> <p>DB-CV-DC/PG-12</p>	
 <p>DL-PS-PT-F Female hardwire power connector</p>	<p>DL-PS-PT-F Female hardwire power connector. 12" wire</p> <p>ORDERING INFORMATION</p> <p>ITEM NO. <input type="text"/></p> <p>DL-PS-PT-F</p>	



MMT-TRK

MAGNETRAX™ DISPLAY
MINI MAGNETIC TRACK

Type	
Project	
Catalog No.	

JESCO's new mini magnetic track can also be used as a magnetic smart track to distribute power to our 24V constant voltage fixtures such as S700, S601, and our flexible tapes (DL-FLEX2-UP). The connectors for the smart track are shown below:

MAGNETIC SMART TRACK CONNECTORS



MMT-ST-CCE-PT15
Magnetic smart track
JESCO female barrel
Connector

Magnetic smart track JESCO female barrel connector
15" magnetic smart track cord with JESCO female barrel connector for magnetic smart track

ORDERING INFORMATION

ITEM NO.	-	FINISH
<input type="text"/>		<input type="text"/>
MMT-ST-CCE-PT15		BK – Black WH – White



MMT-ST-CCE-S601-PC15
Magnetic smart track S601
Connector

Magnetic smart track S601 Connector
15" magnetic smart track cord with S601 connector

ORDERING INFORMATION

ITEM NO.	-	FINISH
<input type="text"/>		<input type="text"/>
MMT-ST-CCE-S601-PC15		BK – Black WH – White



MMT-ST-CCE-S700-PC15
Magnetic smart track S700
Connector

Magnetic smart track S700 Connector
15" magnetic smart track cord with S700 connector

ORDERING INFORMATION

ITEM NO.	-	FINISH
<input type="text"/>		<input type="text"/>
MMT-ST-CCE-S700-PC15		BK – Black WH – White



MMT-ST-CCE-FLEX-UP-PC15
Magnetic smart track
FLEX-UP Connectors

Magnetic smart track FLEX-UP Connector
15" magnetic smart track cord with FLEX-UP connector

ORDERING INFORMATION

ITEM NO.	-	FINISH
<input type="text"/>		<input type="text"/>
MMT-ST-CCE-FLEX-UP-PC15		BK – Black WH – White



**MMT-ST-CCE-FLEX-WT
xx-PC15**
Magnetic smart track FLEX
Connectors

Magnetic smart track FLEX Connector
15" magnetic smart track cord with FLEX clamp connector

ORDERING INFORMATION

ITEM NO.	-	FINISH
<input type="text"/>		<input type="text"/>
MMT-ST-CCE-FLEX-WT08-PC15 MMT-ST-CCE-FLEX-WT12-PC15		BK – Black WH – White



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

11/30/2020

Specifications subject to change without notice.



MMT-TRK

MAGNETRAX™ DISPLAY
MINI MAGNETIC TRACK

Type	
Project	
Catalog No.	



MMT-ST-CCE-FLEX-WT10x-PC15
Magnetic smart track FLEX Connectors

Magnetic smart track FLEX Connector
15" magnetic smart track cord with FLEX clamp connector

ORDERING INFORMATION

ITEM NO.	-	FINISH
<input type="text"/>		<input type="text"/>
MMT-ST-CCE-FLEX-WT10A-PC15		BK – Black
MMT-ST-CCE-FLEX-WT10B-PC15		WH – White



MMT-ST-CCE-FLEX-TB10-PC15
Magnetic smart track FLEX Connectors

Magnetic smart track FLEX Connector
15" magnetic smart track cord with FLEX TB connector

ORDERING INFORMATION

ITEM NO.	-	FINISH
<input type="text"/>		<input type="text"/>
MMT-ST-CCE-FLEX-TB10-PC15		BK – Black
		WH – White

24V POWER SUPPLIES

24V Hard-Wire Power Supplies UL Recognized. Class 2	
Model Number	Wattage
DL-PS-20/24-HWA	20
DL-PS-60/24-HWA	60
DL-PS-96/24-HWA	96

24V Hard-Wire Power Supplies in Junction Box UL Listed. Class 2	
Model Number	Wattage
DL-PS-20/24-JBA	20
DL-PS-60/24-JBA	60
DL-PS-96/24-JBA	96

24V Plug and Play Power Supplies UL Listed	
Model Number	Wattage
DL-PS-WP24/24	24
DL-PS-24/24	24
DL-PS-48/24	48
DL-PS-60/24	60
DL-PS-60/24-CL2*	60
DL-PS-90/24-CL2*	90
DL-PS-100/24-CL2*	96

* Class 2

NOTE: UL Recognized drivers must be installed in a UL Listed junction box

REMOTE POWER SYSTEM

	MODEL	DESCRIPTION
	BATT-LI-24V-100WH	100WH Li-ion battery with charger - for 24V fixtures
	BATT-LI-24V-150WH	150WH Li-ion battery with charger - for 24V fixtures
	BATT-LI-24V-266WH	266WH Li-ion battery with charger - for 24V fixtures



www.jescolighting.com
support@jescolighting.com
Tech Support: 855.592.0029

15 Harbor Park Drive
Port Washington, NY 11050
Main Line: 800.527.7796
Fax Line: 855.265.5768

219 South 6th Ave
City of Industry, CA 91746
Main Line: 855.654.0110
Fax Line: 626.333.2955

11/30/2020

Specifications subject to change without notice.





MMT-TRK
MAGNETRAX™ DISPLAY
 MINI MAGNETIC TRACK

Type	
Project	
Catalog No.	


- NOTE:** Refer to driver specification sheet for ambient temperature range of the driver
- NOTE:** Leave the power connector with enough slack to account for expansion and contraction due to temperature changes
- NOTE:** When multiple drivers are being used, vertical side-by-side mounting is recommended
- NOTE:** Leave at least 5" spacing between LED drivers to allow for airflow to prevent heat buildup

WIRING DIAGRAM



PLUG AND PLAY – With distribution block

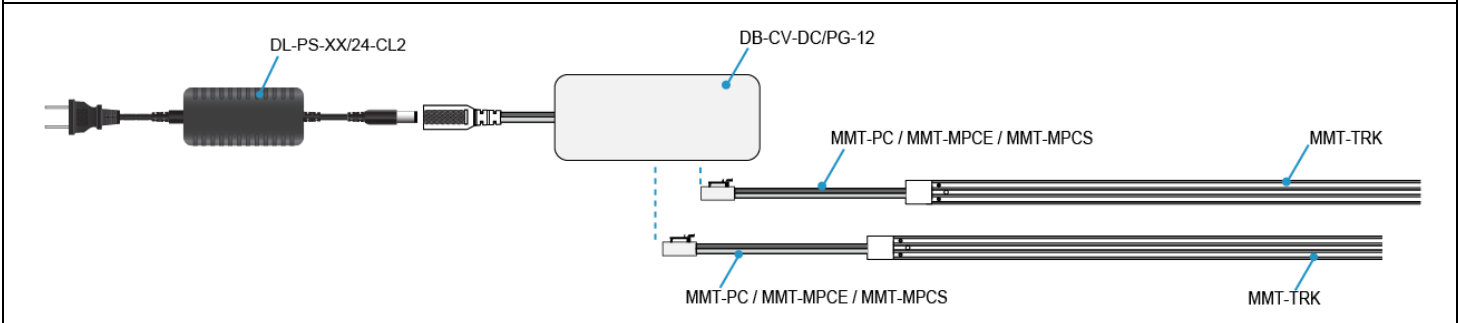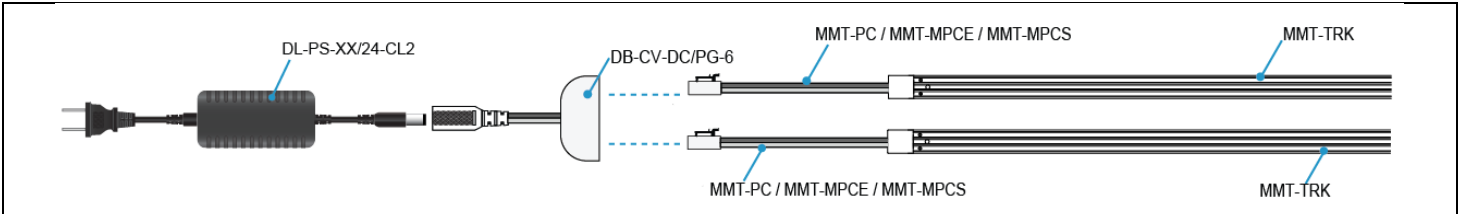


PLUG AND PLAY – With adapter

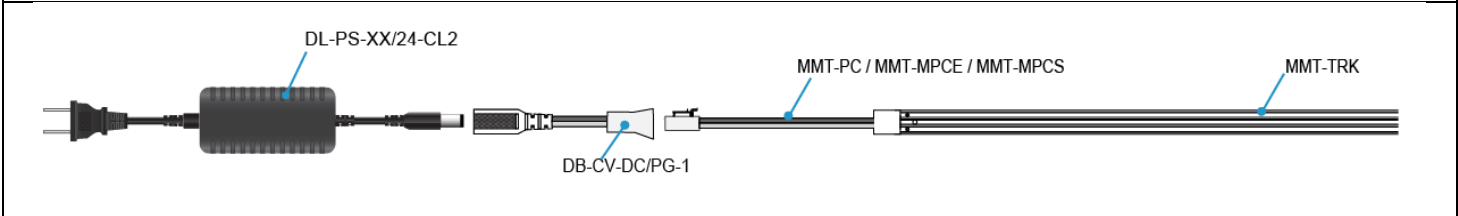

HARDWIRE – With distribution block

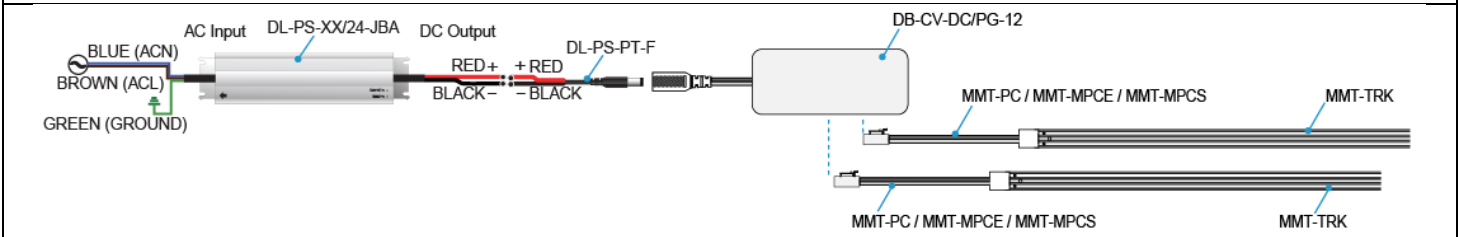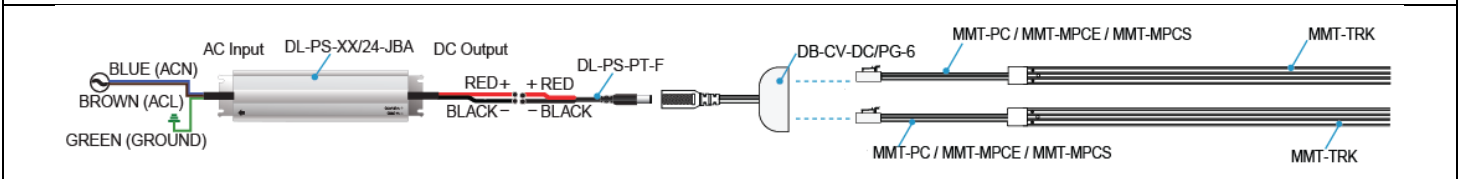

HARDWIRE – With adapter

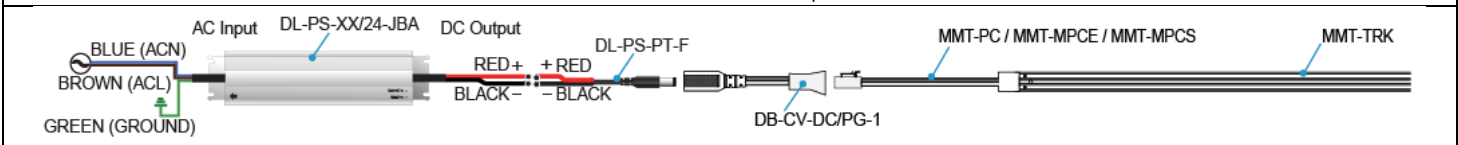

www.jescolighting.com
 support@jescolighting.com
 Tech Support: 855.592.0029

15 Harbor Park Drive
 Port Washington, NY 11050
 Main Line: 800.527.7796
 Fax Line: 855.265.5768

219 South 6th Ave
 City of Industry, CA 91746
 Main Line: 855.654.0110
 Fax Line: 626.333.2955

11/30/2020

Specifications subject to change without notice.