RLF-2515-UNI

2" LED MINIATURE TRIMLESS RECESSED DOWNLIGHTS



Fixture Type









RLF-2515-UNI-SW5 complete set

LED Miniature Trimless Recessed Downlight series is designed for residential and commercial applications. With optional contemporary trimless look and remote driver included. Housing is not required for remodel applications, includes mud-in flange in round, and square options is sold separately. 5-level field selectable color temperature is available.

























SPECIFICATIONS

INPUT VOLTAGE	120-277V AC
WATTAGE	15 W
LUMENS	1000 Lm
EFFICACY	67 Lm/W
CRI	90+
BEAM ANGLE	38°
DIMMING ¹	0-10V Dimmable
CUT-OUT	Round: 2 %" Square: 2 %" x 2 %"

¹ Effectively dim down to 10%

RATINGS	IC, Airtight
ENVIRONMENT	Indoor - Wet
CERTIFICATIONS	cETLus, T24 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Remote driver
REQUIRED	Round or square mud-in flange
OPTIONAL	RLH-23354-NC-UNI for round mud-in flange only
WARRANTY ²	5 years

PERFORMANCE

CCT selectable via switch on heatsink

COLOR TEMPERATURE ³	LUMEN ⁴	WATTAGE	EFFICACY	CRI	
SW5 (27/30/35/40/50K) ⁵	1000 Lm	15 W	67 Lm/W	90+	

^{3 &}amp; 4 CCT within +/-10%

2700K	3000K	3500K	4000K	5000K
Warm White		Neutral White		Cool White

RLH-23354-NC-UNI

ORDERING INFO

STEP 1 - Light Engine with LED



MODEL **RLF-2515-UNI** CCT / CRI **SW5**

SW5 - Switchable CCT (27/30/35/40/50) / 90 CRI

STEP 2 - Optional Trim (Sold separately)





RLT-25-RTL-WH - Round White Finish Trim **RLT-25-STL-WH** - Square White Finish Trim

15 Harbor Park Drive Port Washington, NY 11050 Main 800 527 7796 855 265 5768 Fax



219 South 6th Ave City of Industry, CA 91746

Main 800 527 7796 Fax 855 265 5768

OPTIONAL ACCESSORY

(Sold separately)



Universal mounting plate with hanger bars. For cutout sizes: 2 1/8", 2 1/8", 3 3/4" or 5 1/4"

> support@jescolighting.com Tech Support 855 592 0029

² See published warranty terms for detailed information

⁵ Switchable CCT

RLF-2515-UNI

2" LED MINIATURE TRIMLESS RECESSED DOWNLIGHTS




Fixture Type


Project

Notes

TECHNICAL DRAWING

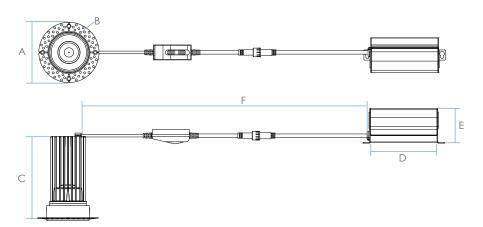

DIMENSIONS			
Α	3 ½"	90 mm	
В	2 ½"	61 mm	
С	5"	126 mm	
D	5"	122 mm	
Е	2"	52 mm	
F	17"	430 mm	

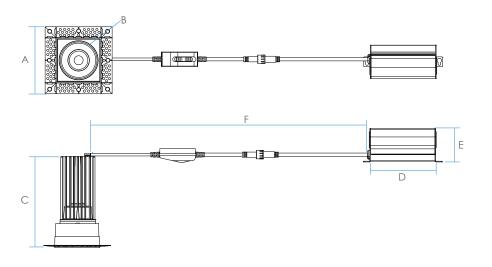

DIMENSIONS			
Α	4" × 4"	104 mm	
В	2 ½"	61 mm	
С	5"	126 mm	
D	5"	126 mm	
E	2"	52 mm	
F	17"	430 mm	

TRIM OPTIONS



PART NUMBER	RLF-25-RLT-WH
DESCRIPTION White Finish Round Mud-in Tr	
ENVIROMENT	Indoor, Wet
DIMENSIONS	3 ½" Ø



PART NUMBER	RLF-25-SLT-WH
DESCRIPTION	White Finish Square Mud-in Trim
ENVIROMENT	Indoor, Wet
DIMENSIONS	4" x 4"

COMPATIBLE DIMMERS

COOPER	SIO6P
LEVITON	6621, 6672, IPL06-10Z
LUTRON	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P